

## APPENDICES

**Appendix A1.** Fort Mason Center Parking Impact Notice (Major Events in 2010)

**Appendix A.** Alternatives Considered but Dismissed

**Appendix B.** Transportation and Circulation

**Appendix C.** Cultural Resources

**Appendix D.** Biological Resources

**Appendix E.** Air Quality

**Appendix F.** Noise

This page intentionally left blank

## **APPENDIX A1**

### **Fort Mason Center Parking Impact Notice**

Appendix A1 presents a list of the major events hosted by the Fort Mason Center in 2010. Attendance numbers are projections.

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT**  
 Date: January 2010  
 February 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
-------------	----------------	------------	-------------	------------	------------------------------

**JANUARY**

<b>Rock With You: A Tribute to Michael Jackson, Latin Style</b>	Cowell Theater	Fri Jan 22 Sat Jan 23	8pm 4pm, 8pm	437	No
<b>Rent</b>	Southside Theatre	Fri Jan 22 Sat Jan 23	8pm	Theater capacity: 162	No
<b>BATS Improv</b>	Bayfront Theatre	Fri Jan 22 Sat Jan 23	8pm 8pm	Theater capacity: 200	No
<b>Oedipus el Rey</b>	Magic Theatre	Thur Jan 28	8pm	Theater capacity: 320	No
<b>ZAP Good Eats</b>	Herbst Pavilion	Thur Jan 28	6-9pm	1,000	No
<b>ZAP Wine Tasting</b>	Herbst & Festival Pavilion	Sat Jan 30	10am-5pm	7,000	No
<b>Rumpelstiltskin</b>	Young Performers Theatre	Sat Jan 30 Sun Jan 31	1pm 1pm, 3:30pm	Theater capacity: 100	No

**FEBRUARY**

<b>Casky &amp; Lees Arts of Pacific Asia</b>	Festival Pavilion	Thu Feb 4 Fri Feb 5 Sat Feb 6 Sun Feb 7	6pm-9pm Gala 11am-7pm 11am-7pm 11am-5pm	500 2,000 2,000 1,500	Gala: Valet Lot E & City Yachts Daily Valet in Lot E
<b>Oedipus el Rey</b>	Magic Theatre	Thur Feb 4	8pm	Theater capacity: 320	No
<b>Rumpelstiltskin</b>	Young Performers Theatre	Sat Feb 6 Sun Feb 7	1pm 1pm, 3:30pm	Theater capacity: 100	No
<b>Warehouse Sale</b>	Herbst Pavilion	Sat Feb 5	10am-4pm	1,000	No
<b>2010 San Francisco Fine Print Fair</b>	Conference Center	Fri Feb 5 Sat Feb 6 Sun Feb 7	6pm-9pm 10am-6pm 11am-5pm	100 200 200	No
<b>Huun Huur Tu: Xoomei -- Tuvan Throat Singing</b>	Cowell Theater	Thu Feb 11	8pm	200	No
<b>Casky &amp; Lees Tribal Arts</b>	Festival Pavilion	Thu Feb 11 Fri Feb 12 Sat Feb 13 Sun Feb 14	6pm-9pm Gala 11am-7pm 11am-7pm 11am-5pm	500 1,500 1,500 1,000	Gala: Valet Lot E & Daily Valet in Lot E

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT**  
 Date: January 2010  
 February 2010



<b>Rumpelstiltskin</b>	Young Performers Theatre	Sat Feb 13 Sun Feb 14	1pm 1pm, 3:30pm	Theater capacity: 100	No
<b>Oedipus el Rey</b>	Magic Theatre	Thu Feb 11	8pm	Theater capacity: 320	No
<b>Eurythmy Dance Concert</b>	Cowell Theater	Fri Feb 12 Sat Feb 13	8pm 2pm	430 / day	No
<b>Usmp Event</b>	Herbst Pavilion	Sat Feb 20	7-11pm	1,000	Reserved lot C & D for 70 spaces
<b>Chronicle Wine Competition</b>	Festival Pavilion	Sat Feb 20	11am-5pm	3500/ day	No
<b>Rent</b>	Southside Theatre	Sat Feb 20	8pm	Theater capacity: 162	No
<b>BATS Improv</b>	Bayfront Theatre	Sat Feb 20	8pm	Theater capacity: 200	No
<b>Oedipus el Rey</b>	Magic Theatre	Sat Feb 20	8pm	Theater capacity: 320	No
<b>Gambere Rosso Wine Tasting (private)</b>	Herbst Pavilion	Wed Feb 24	12pm-7pm	1,000	No
<b>Ellis Wood Dance</b>	Cowell Theater	Sat Feb 27	8pm	430 / day	No
<b>Pacific Orchid Show</b>	Festival Pavilion	Fri Feb 26 Sat Feb 27 Sun Feb 28	10am-10pm 9am-6pm 10am-5pm	2,000 3,500 3,500	No
<b>BATS Improv</b>	Bayfront Theatre	Fri Feb 26	8pm	Theater capacity: 200	No
<b>Oedipus el Rey</b>	Magic Theatre	Fri Feb 26	8pm	Theater capacity: 320	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT**  
 Date: March 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>Art Du Jour Okizu Foundation Gala</b>	Herbst Pavilion	Sat Mar 6	5pm-11pm	450	No
<b>Academy of Friends Gala</b>	Festival Pavilion	Sun Mar 7	5:00pm-11pm	3,000	Valet
<b>Great SF Crystal Fair</b>	Conference Center	Sat Mar 6 Sun Mar 7	10am-6pm 10am-4pm	300	No
<b>Charlie &amp; the Chocolate Factory</b>	Young Performers Theatre	Sat Mar 6 Sun Mar 7	1pm, 1pm, 3:30pm	Theater capacity: 100	No
<b>Oedipus el Rey</b>	Magic Theatre	Sat Mar 6 Sun Mar 7	8pm 2:30pm	Theater capacity: 320	No
<b>BATS Improv</b>	Bayfront Theatre	Sat Mar 6 Sun Mar 7	8pm 7pm	Theater capacity: 200	No
<b>Stark Carpet Warehouse Sale</b>	Herbst Pavilion	Thur Mar 11 Fri Mar 12 Sat Mar 13 Sun Mar 14	10am-8pm 10am-8pm 10am-8pm 10am-6pm	1000/ day	No
<b>Contemporary Crafts Market</b>	Festival Pavilion	Sat Mar 13 Sun Mar 14	10am-5pm 10am-5pm	800-1,500 / day	Shuttle Marina Middle School
<b>Hi Ho Silver</b>	Marina Room	Sat Mar 13 Sun Mar 14	11am-5pm 11am-4pm	200/ day	No
<b>Charlie &amp; the Chocolate Factory</b>	Young Performers Theatre	Sat Mar 13 Sun Mar 14	1pm, 1pm, 3:30pm	Theater capacity: 100	No
<b>Oedipus el Rey</b>	Magic Theatre	Sat Mar 13 Sun Mar 14	8pm 2:30pm	Theater capacity: 320	No
<b>BATS Improv</b>	Bayfront Theatre	Sat Mar 13 Sun Mar 14	8pm 7pm	Theater capacity: 200	No
<b>A Memory, a Monologue, a Rant and a Prayer</b>	Southside Theater	Fri Mar 12 Sat Mar 13	8pm 2pm, 8pm	Theater capacity: 162	No
<b>SF International Chocolate Salon</b>	Festival Pavilion	Sat Mar 20	10am-6pm	1,000	No
<b>Spring Dance Inspiration 2009</b>	Cowell Theater	Sat Mar 20 Sun Mar 21	8pm 3pm	300	No
<b>Charlie &amp; the Chocolate Factory</b>	Young Performers Theatre	Sat Mar 20 Sun Mar 21	1pm, 1pm, 3:30pm	Theater capacity: 100	No
<b>BATS Improv</b>	Bayfront Theatre	Sat Mar 20 Sun Mar 21	8pm 7pm	Theater capacity: 200	No
<b>CLAWS Bark</b>	Herbst Pavilion	Thu Mar 25	6pm-11pm	500	No
<b>Rhone Rangers Grand Tasting</b>	Festival Pavilion	Sun Mar 28	1:30pm-4pm	2500/ day	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE--APRIL 2010**  
 Date: April 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>Salmon Summit</b>	Conference Center	Thur Apr 1	10am-3pm	300	No
<b>Bay Area Derby Girls</b>	Herbst Pavilion	Sat Apr 3	8pm-10pm	1,200	No
<b>BATS Improv</b>	Bayfront Theater	Sat Apr 3	8pm	Theater capacity: 200	No
<b>SF Conservatory of Music Opera: The Rake's Progress</b>	Cowell Theater	Sat Apr 10 Sun Apr 11	7:30pm 2:00pm	Theater capacity: 437	No
<b>San Francisco Vintner's Market</b>	Festival Pavilion	Sat Apr 10 Sun Apr 11	12pm-5pm 12pm-5pm	2,000 per day	FMC Valet
<b>Airnb Presents: Private Reception</b>	Conference Center	Sat Apr 10	5pm-2am	300	No
<b>The Twitter</b>	Herbst Pavilion	Wed Apr 14 Thu Apr 15	6:00pm thru 6:00pm next day	400-800	No
<b>"Pupi" Sicilian Puppet Theatre</b>	Cowell Theater	Thu Apr 15	7pm	400	No
<b>Cathedral School for Boys Gala Fundraiser</b>	Herbst Pavilion	Sat Apr 17	6pm-12am	400	No
<b>An Accident</b>	Magic Theatre	Thu Apr 15 Sat Apr 17 Sun Apr 18	8pm 8pm 2:30pm	Theater capacity: 320	No
<b>BATS Improv</b>	Bayfront Theater	Sat Apr 17 Sun Apr 18	8pm 7pm	Theater capacity: 200	No
<b>Tell It Slant</b>	Southside Theater	Sat Apr 17 Sun Apr 18	8pm 2pm	Theater Capacity: 162	No
<b>City Dance: Spring on Stage</b>	Cowell Theater	Sat Apr 17	7:30pm 2:00pm	400	No
<b>A Taste of Tamales by the Bay</b>	Conference Center	Sun Apr 18	12pm-4:30pm	300	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE--APRIL 2010**  
 Date: April 2010



<b>San Francisco International Beerfest</b>	Festival Pavilion	Sat Apr 24	7pm-10pm	3000 <b>SOLD OUT</b>	No
<b>Vietnamese Poetry Festival</b>	Fleet Room	Sat Apr 24	7pm	200	No
<b>Peter &amp; the Wolf</b>	Young Performers Theatre	Sat Apr 24 Sun Apr 25	1pm, 1pm, 3:30pm	Theater capacity: 100	No
<b>An Accident</b>	Magic Theatre	Sat Apr 24 Sun Apr 25	2:30pm, 8pm 2:30pm	Theater capacity: 320	No
<b>BATS Improv</b>	Bayfront Theater	Sat Apr 24 Sun Apr 25	8pm 7pm	Theater capacity: 200	No
<b>Tell It Slant</b>	Southside Theater	Sat Apr 24 Sun Apr 26	8pm 2pm	Theater Capacity: 162	No
<b>Toe to Toe: The Grand Slam</b>	Herbst Pavilion	Thu Apr 29	6:30pm-9:30pm	400	No
<b>An Accident</b>	Magic Theatre	Thu Apr 30	8pm	Theater capacity: 320	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE MAY 2010**  
 Date: May 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>Norway Days</b>	Herbst Pavilion	Sat May 1 Sun May 2	8am-5pm 10am-4pm	1500 per day	No
<b>Peter and the Wolf</b>	Young Performers Theatre	Sat May 2 Sun May 3	1pm 1pm & 3:30pm	Theater capacity: 100	No
<b>BATS Improv</b>	Bayfront Theater	Fri May 1 Sat May 2	8pm	Theater capacity: 200	No
<b>Tell It Slant</b>	Southsde Theater	Fri May 1 Sat May 2	8pm 2pm, 8pm	Theater Capacity: 162	No
<b>An Accident</b>	Magic Theatre	Fri May 1 Sat May 2 Sun May 3	8pm 8pm 2:30pm, 7pm	Theater capacity: 320	No
<b>SFMOMA Artists Gallery 14th Annual Warehouse Sale</b>	Bldg. A	Wed May 5	6:00pm-9:00pm gala reception	300	No
<b>Wine Warehouse</b>	Herbst Pavilion	Wed May 5	12pm-7pm	1,000	no
<b>SF Underground</b>	Festival Pavilion	Sat May 8	10am-11:30pm	2,000	No
<b>LINES Ballet School Ensemble</b>	Cowell Theater	Fri May 7 Sat May 8	8pm	400	No
<b>Tell It Slant</b>	Southsde Theater	Fri May 7 Sat May 8 Sun May 9	8pm 8pm 2pm, 8pm	Theater Capacity: 162	No
<b>An Accident</b>	Magic Theatre	Sat May 8 Sun May 9	8pm 2:30pm, 7pm	Theater capacity: 320	No
<b>BATS Improv</b>	Bayfront Theater	Sat May 8 Sun May 9	8pm 7pm	Theater capacity: 200	No
<b>Peter and the Wolf</b>	Young Performers Theatre	Sat May 8 Sun May 9	1pm 1pm & 3:30pm	Theater capacity: 100	No
<b>SF Art Institute MFA Graduate Exhibition Opening Night Gala</b>	Herbst Pavilion	Thu May 13	7pm-10pm	500	No
<b>PCBA Book Arts and Printers Fair</b>	Conference Center	Sat May 15	9am-3pm	300	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE MAY 2010**  
 Date: May 2010



<b>SF Art Institute MFA Graduate Exhibition</b>	Herbst Pavilion	Sat May 15 thru Sat May 22	12pm-6pm	200 per day	No
<b>20th Annual Star Chefs &amp; Vintners Gala for Meals On Wheels</b>	Festival Pavilion	Sun May 16	5pm-11pm	700	Valet Lots C,D & Lots 1,2
<b>BATS Improv</b>	Bayfront Theater	Sat May 15 Sun May 16	8pm 7pm	Theater capacity: 200	No
<b>Tell It Slant</b>	Southside Theater	Sat May 15 Sun May 16	8pm 2pm	Theater Capacity: 162	No
<b>School of the Arts Dance Concert: Intention</b>	Cowell Theater	Fri May 14 Sat May 15 Sun May 16	8pm 8pm 2pm	350	No
<b>SF Fine Art Fair</b>	Festival Pavilion	Thu May 20 Fri May 21 Sat May 22 Sun May 23	Preview 6-9:30pm 12pm-8pm 11am-7pm 12pm-6pm	1,500	No
<b>Derevo</b>	Cowell Theater	Thu May 20 Fri May 21 Sat May 22	8pm 8pm 8pm	Theater capacity: 437	No
<b>Studio Rue Dance Dana Lawton Dance</b>	Southside Theater	Thu May 20 Sat May 22	8:30pm 9pm 2pm	Theater capacity: 162	No
<b>BATS Improv</b>	Bayfront Theater	Fri May 21 Sat May 21	8pm 8pm	Theater capacity: 200	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: June 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>ExpressionEngine Codelgniter Conference 2010</b>	Conference Center	Mon May 31 Tue Jun 1 Wed Jun 2	9am-6pm 8am-6pm 8am-6pm	300 per day	No
<b>Alliant International Graduation</b>	Herbst Pavilion	Fri Jun 4	1-5 pm	900	Reserved parking between Bldings. C & D 50 spaces
<b>CFA Examination</b>	Festival Pavilion	Sat Jun 5	8am-5pm	2,283	No
<b>Crush Barrel Wine Market</b>	Fleet Room	Sat Jun 5	12-5pm	500	No
<b>TAPAS Grand Tasting</b>	Conference Center	Sat Jun 5	2-5pm	800	Reserved parking between Bldings. C & D 80 spaces
<b>City Ballet School Spring Dance</b>	Cowell Theater	Sat Jun 5	2pm 7pm	300	No
<b>Synergy School Bay Area Voices</b>	Northside Theater	Sat Jun 6	8:00pm	Theater capacity: 160	No
<b>San Francisco Birth &amp; Baby Fair</b>	Herbst Pavilion	Sun Jun 6	10-5pm	800	No
<b>Fort Mason Center Farmers Market</b>	Parking Lot	Starting Sun Jun 6 <b>Every Sunday</b>	9:30am-1:30pm	High Attendance expected	No
<b>Dance Without Borders</b>	Cowell Theater	Sun Jun 6	5-7pm	Theater capacity: 437	No
<b>BATS Improv</b>	Bayfront Theater	Fri Jun 4 Sat Jun 5 Sun Jun 6	8pm 8pm 7pm	Theater capacity: 200	No
<b>Shecky's Girls Night Out</b>	Herbst Pavilion	Wed Jun 9 Thu Jun 10	5-10pm 5-10pm	400-500	No
<b>Great SF Crystal Fair</b>	Conference Center	Sat Jun 12 Sun Jun 13	10-6pm 10-4pm	300	No
<b>Chamberdance</b>	Cowell Theater	Sat Jun 12 Sun Jun 13	8pm 3pm	300	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: June 2010



<b>BATS Improv</b>	Bayfront Theater	Fri Jun 12 Sat Jun 13 Sun Jun 14	8pm 8pm 7pm	Theater capacity: 200	No
<b>Slow Food "Golden Glass Wine Tasting"</b>	Festival Pavilion	Sat Jun 12	1-5pm	2,000	No
<b>Swinerton Private Event</b>	Herbst Pavilion	Fri Jun 18	7:30am-4pm	300	No
<b>Swinerton Private Event</b>	Cowell Theater	Fri Jun 18	7:30am-4pm	300	No
<b>Glory Glory</b>	Northside Theater	Fri Jun 18 Sat Jun 19 Sun Jun 20	8pm 8pm 7pm	Theater capacity: 162	No
<b>Bay Area Derby Girls</b>	Herbst Pavilion	Sat Jul 19	7-11:00pm	1,200	No
<b>BATS Improv</b>	Bayfront Theater	Fri Jun 18 Sat Jun 19 Sun Jun 20	8pm 8pm 7pm	Theater capacity: 200	No
<b>New Old Time Chautauqua Keep the Faith</b>	Cowell Theater	Sat Jul 19	7:30pm	Theater capacity: 437	No
<b>Glory Glory</b>	Northside Theater	Fri Jun 25 Sat Jun 26 Sun Jun 27	8pm 8pm 2pm	Theater capacity: 162	No
<b>BATS Improv</b>	Bayfront Theater	Fri Jun 25 Sat Jun 26 Sun Jun 27	8pm 8pm 7pm	Theater capacity: 200	No
<b>Pinot Days Grand Tasting</b>	Festival Pavilion	Sun Jun 27	11am-5pm	2,000	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE--**  
 Date: July 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>Crush Barrel Wine Market</b>	Fleet Room Bldg D	Sat Jul 3	12pm-5pm	300	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Jul 4	9:30am-1:30pm	3,000	No
<b>BATS Improv</b>	Bldg B	Fri Jul 9 Sat Jul 10	8pm 8pm	Theater capacity: 200	No
<b>Easily Distracted Theatre: Foresight</b>	Southside Theater	Fri Jul 9 Sat Jul 10 Sun Jul 11	8pm 2pm, 8pm 8pm	Theater capacity: 162	No
<b>Asahar Dance Foundation Zahara</b>	Cowell Theater	Fri Jul 9	8pm	Theater capacity: 437	No
<b>Avon Walk for Breast Cancer</b>	Great Meadow Upper Fort Mason	Sat Jul 10 Sun Jul 11	Begin: 5:30am End: 3:00pm	High Volume	car entrance to FMC could be impacted as walkers pass by
<b>The Guardsman Roundup</b>	Herbst Pavilion	Sat Jul 10	8:30pm-1am	1,000	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Jul 11	9:30am-1:30pm	3,000	No
<b>The BreastFest</b>	Herbst Pavilion	Sat Jul 17	12pm-5pm	1,000	No
<b>Lamb Jam San Francisco</b>	Festival Pavilion	Sun Jul 18	1pm-4pm	1,000	No
<b>Easily Distracted Theatre: Foresight</b>	Southside Theater	Fri Jul 16 Sat Jul 17 Sun Jul 18	8pm 8pm 2pm, 8pm	Theater capacity: 162	No
<b>Post:Ballet-- Concert One</b>	Cowell Theater	Fri Jul 16 Sat Jul 17	8pm	Theater capacity: 434	No
<b>BATS Improv</b>	Bayfront Theater	Fri Jul 16 Sat Jul 17 Sun Jul 18	8pm 8pm 2pm	Theater capacity: 200	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Jul 18	9:30am-1:30pm	3,000	No
<b>Bay Area Producers Conference</b>	Cowell Theater	Sat Jul 24	11am-10pm	Theater capacity: 437	No
<b>BATS Improv</b>	Bayfront Theater	Fri Jul 23 Sat Jul 24 Sun Jul 25	8pm 8pm 2pm	Theater capacity: 200	No
<b>BASOTI Mozart's The Magic Flute</b>	Northside Theater	Thu Jul 22 Fri Jul 23 Sat Jul 24 Sun Jul 25	8pm 8pm 8pm 2pm	Theater capacity: 162	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE--**  
 Date: July 2010



<b>Indoor Gardening Exposition</b>	Festival Pavilion	Sat Jul 24 Sun Jul 25	10am-6pm 12pm-6pm	800	No
<b>San Francisco Marathon</b>	passes thru Fort Mason	Sun Jul 25	5:30-8:30am	8,000	car entrance to FMC will be impacted as racers pass by
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Jul 25	9:30am-1:30pm	3,000	No
<b>Barney 's New York</b>	Herbst Pavilion	Thu Jul 29 Fri Jul 30 Sat Jul 31	10-8pm	600	No
<b>Renegade Craft Fair</b>	Festival Pavilion	Sat Jul 31 Sun Aug 1	11-7pm 11-7pm	1,000	No
<b>Hi Ho Silver</b>	Gatehouse	Sat Jul 31 Sun Aug 1	10:30-4pm 11-5pm	100	No
<b>BATS Improv</b>	Bayfront Theater	Fri Jul 30 Sat Jul 31	8pm 8pm	Theater capacity: 200	No
<b>BASOTI Mozart's The Magic Flute</b>	Northside Theater	Fri Jul 30 Sat Jul 31	8pm 8pm	Theater capacity: 162	No
<b>West Coast Country Music Festival</b>	Great Meadow Upper Fort Mason	Sat Jul 31	11am-7pm	3,000	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE for August 2010**  
 Date: August 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>Barneys New York Warehouse Sale</b>	Herbst Pavilion	Mon Aug 2 Tue Aug 3 Wed Aug 4 Thu Aug 5 Fri Aug 6 Sat Aug 7 Sun Aug 8	10am-8pm 10am-8pm 10am-8pm 10am-8pm 10am-8pm 10am-7pm 10am-7pm	600 per day	No
<b>SF Opera Merlola L'Elisir d'Amore</b>	Cowell Theater	Fri Aug 6 Sat Aug 7 Sun Aug 8	8pm 8pm 2pm	Theater capacity 437	No
<b>Hi Ho Silver</b>	Marina Room	Fri Aug 6 Sat Aug 7 Sun Aug 8	11-4pm 10-5pm 11-4pm	100	No
<b>Off the Grid</b>	FMC Parking Lot	Fri Aug 6	5pm-9pm	800	Main Parking lot front of building C
<b>Angel Island: Immigrant Gateway to America</b>	Conference Center Bldg. A	Sat Aug 7	1:30pm-4pm	180	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Aug 8	9:30am-1:30pm	3,000	Parking lot front of building A
<b>Crush Barrel Wine Market</b>	Fleet Room Bldg. D	Sun Aug 9	12pm-5pm	300	No
<b>BATS Improv</b>	Bayfront Theater	Fri Aug 7 Sat Aug 8	8pm 8pm	Theater capacity: 200	No
<b>Fabulous Fashionista Sample Sale</b>	Fleet Room Bldg. D	Sat Aug 14	10-3pm	200	No
<b>ACC Craft Fair 2007</b>	Herbst & Festival Pavilion	Fri Aug 13 Sat Aug 14 Sun Aug 15	10-8pm 10-6pm 10-5pm	2,000 +	Yes
<b>Hi Ho Silver</b>	Marina Room	Fri Aug 13 Sat Aug 14 Sun Aug 15	11-4pm 10-5pm 11-4pm	100	No
<b>Off the Grid</b>	FMC Parking Lot	Fri Aug 13	5pm-9pm	800	Main Parking lot front of building C
<b>BATS Improv</b>	Bayfront Theater	Fri Aug 13 Sat Aug 14	8pm 8pm	Theater capacity: 200	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Aug 15	9:30am-1:30pm	3,000	Parking lot front of building A
<b>LINES Ballet Summer Showcase</b>	Cowell Theater	Tue Aug 17	8pm	Theater capacity 437	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE for August 2010**  
 Date: August 2010



<b>Family Winemakers of California</b>	Festival Pavilion	Sun Aug 22 Mon Aug 23	3-6pm Trade only	1,200-2,000	Yes, Section E
<b>Vintage European Posters Show</b>	Firehouse	Fri Aug 20 Sat Aug 21 Sun Aug 22	10-6pm 10-6pm 11-5pm	150	No
<b>Off the Grid</b>	FMC Parking Lot	Fri Aug 20	5pm-9pm	800	No
<b>BATS Improv</b>	Bayfront Theater	Fri Aug 20 Sat Aug 21	8pm 8pm	Theater capacity: 200	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Aug 22	9:30am-1:30pm	3,000	Parking lot front of building A
<b>Lyric Theatre The Dollar Princess</b>	Southside Theater	Sat Aug 28 Sun Aug 29	8pm 2pm	Theater capacity: 168	No
<b>Off the Grid</b>	FMC Parking Lot	Fri Aug 27	5pm-9pm	800	Main Parking lot front of building C
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Aug 29	9:30am-1:30pm	3,000	Parking lot front of building A
<b>BATS Improv</b>	Bayfront Theater	Fri Aug 27 Sat Aug 28	8pm 8pm	Theater capacity: 200	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: September 3, 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>Off the Grid</b>	FMC Parking Lot	Fri Sep 3	5pm-9pm	800	Main Parking lot front of building C
<b>BATS Improv</b>	Bayfront Theater	Fri Aug 3 Sat Aug 4	8pm 8pm	Theater capacity: 200	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Sep 5	9:30am-1:30pm	3,000	Parking lot in front of Bldg. A
<b>Ceramics Annual of America</b>	Herbst Pavilion	Thu Sep 9 Fri Sep 10 Sat Sep 11 Sun Sep 12	5:30-8pm 10-8pm 10-8pm 10-6pm	400-600 per day	No
<b>Off the Grid</b>	FMC Parking Lot	Fri Sep 10	5pm-9pm	800	Main Parking lot front of building C
<b>BATS Improv</b>	Bayfront Theater	Fri Aug 10 Sat Aug 11	8pm 8pm	Theater capacity: 200	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Sep 12	9:30am-1:30pm	3,000	Parking lot in front of Bldg. A
<b>Bank of America Private Event</b>	Herbst Pavilion	Mon Sep 13	5-10pm	450	Valet Parking Lot E
<b>San Francisco Modernism (SF20)</b>	Festival Pavilion	Thu Sep 16 Fri Sep 17 Sat Sep 18 Sun Sep 19	6-9pm 11-7pm 11-7pm 12-5pm	400 700 700 700	Valet Parking Opening Nite
<b>The Brothers Size</b>	Magic Theatre	Preview Thu Sep 16 Sat Sep 18 Sun Sep 19	8pm 2:30pm, 8pm 2:30pm	Theater capacity: 162	No
<b>Zhukov Dance Theatre Product 03</b>	Cowell Theater	Thu Sep 16 Sat Sep 18 Sun Sep 19	8pm 8pm 8pm	Theater capacity: 437	No
<b>SFMOMA Artists Gallery Reception</b>	Building A	Thu Sep 16	5:30-7:30pm	300	No
<b>Haute Life PR &amp; Marketing</b>	Herbst Pavilion	Thu Sep 16	5-10pm	1,000	No
<b>Off the Grid</b>	FMC Parking Lot	Fri Sep 17	5pm-9pm	800	Main Parking lot front of building C

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: September 3, 2010



<b>BATS Improv</b>	Bayfront Theater	Fri Aug 17 Sat Aug 18	8pm 8pm	Theater capacity: 200	No
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Sep 19	9:30am-1:30pm	3,000	Parking lot in front of Bldg. A
<b>San Francisco Hip Hop DanceFest Auditions</b>	Cowell Theater	Sun Sep 19	11am 3:30pm	Theater capacity: 437	No
<b>Non-Profit Housing Association of CA: NPH Fall Conference</b>	Herbst Pavilion	Tue Sep 21	8am-5:30pm	450	No
<b>Annual Big Book Sale</b>	Festival Pavilion	Tue Sep 21 Wed Sep 22 Thu Sep 23 Fri Sep 24 Sat Sep 25 Sun Sep 26	4-8pm 10-8pm 10-8pm 10-8pm 10-8pm 10-4pm	2,000 +	No
<b>Off the Grid</b>	FMC Parking Lot	Fri Sep 24	5pm-9pm	800	Main Parking lot front of building C
<b>BATS Improv</b>	Bayfront Theater	Fri Sep 24 Sat Sep 25	8pm 8pm	Theater capacity: 200	No
<b>The Brothers Size</b>	Magic Theatre	Fri Sep 24 Sat Sep 25	8pm 2:30pm, 8pm	Theater capacity: 162	No
<b>Summer Search</b>	Herbst Pavilion Cowell Theater	Fri Sep 24	4-11pm	450	Valet Parking
<b>FMC Farmers' Market</b>	FMC Parking Lot	Sun Sep 26	9:30am-1:30pm	3,000	Parking lot in front of Bldg. A
<b>Pinocchio</b>	Young Performers Theatre	Sat Sep 25 Sun Sep 26	1pm 1pm & 3:30pm	Theater capacity: 100	No
<b>West Coast Green</b>	Festival Herbst Southside Theater Building C	Wed Sep 29 Thu Sep 30 Fri Oct 1 Sat Oct 2	8am-4pm 7am-6pm 7am-6pm 7am-6pm	800-900	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: October 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>West Coast Green</b>	Festival Herbst Southside Theater Building C	Fri Oct 1 Sat Oct 2	7am-6pm 7am-6pm	800-900	No
<b>Bridge to Bridge Run</b>	N/A	Sun Oct 3	9-10:30am will pass FMC gates	10,000	No
<b>SOCAP 2010</b>	GG Room Herbst Cowell Fleet Room Building C	Mon Oct 4 Tue Oct 5 Wed Oct 6	8am-9pm daily	900	No
<b>Pinocchio</b>	Young Performers Theatre	Sat Oct 2 Sun Oct 3	1pm, 3:30pm 1pm, 3:30pm	Theater capacity: 100	No
<b>Fleet Week</b>	N/A	Thu Oct 7 Fri Oct 8 Sat Oct 9 Sun Oct 10	Blue Angels at 3pm each day	High Attendance expected on Sat, Sun	No
<b>Navy in Space</b>	Fleet Room	Sat Oct 9 Sun Oct 10	9-5pm	1500/day	No
<b>Summersalt</b>	Herbst Festival and outdoors between building C/D	Sat Oct 9	11am-8pm	3,000	Lot between C/D
<b>BATS Improv</b>	Bayfront Theatre	Fri Oct 8 Sat Oct 9	8pm	Theater capacity: 200	No
<b>The Brothers Size</b>	Magic Theatre	Fri Oct 8 Sat Oct 9 Sun Oct 10	8pm 2:30pm, 8pm 2:30pm	Theater capacity: 162	No
<b>Beatles Fest</b>	Cowell Theater Band Shell	Fri Oct 8 Sat Oct 9	8pm 1pm. 4pm	Theater capacity: 437	No
<b>West Wave</b>	Cowell Theater	Mon Oct 11	8pm	Theater capacity: 437	No
<b>Pinocchio</b>	Young Performers Theatre	Sat Oct 9 Sun Oct 10	1pm, 3:30pm 1pm, 3:30pm	Theater capacity: 100	No
<b>Agile Open 2010</b>	Conference Center	Mon Oct 12 Tue Oct 13	8am-8:30pm 8:30am-5pm		No
<b>Johnnie Walker</b>	Herbst	Wed Oct 13 Thu Oct 14 Fri Oct 15 Sat Oct 16	5:00pm-10pm Nightly	150	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: October 2010



<b>Tribal Art Show</b>	Fleet Room	Fri Oct 15 Sat Oct 16 Sun Oct 17	6pm-9pm 11am-7pm 11am-5pm	300	No
<b>BATS Improv</b>	Bayfront Theatre	Fri Oct 15 Sat Oct 16	8pm 8pm	Theater capacity: 200	No
<b>The Brothers Size</b>	Magic Theatre	Fri Oct 15 Sat Oct 16 Sun Oct 17	8pm 8pm 2:30pm	Theater capacity: 162	No
<b>Keep Her Safe</b>	Cowell Theater	Sat Oct 16 Sun Oct 17	8pm 1pm	Theater capacity: 437	No
<b>Title Nine Sale</b>	Herbst Pavilion	Thu Oct 21 Fri Oct 22 Sat Oct 23 Sun Oct 24	9am-9pm	1000 daily	No
<b>SF Open Studios 2006</b>	Conference Center Gatehouse Bldg. C Fleet Room	Fri Oct 22 Sat Oct 23 Sun Oct 24	11am-6pm 11am-6pm	800	No
<b>BATS Improv</b>	Bayfront Theatre	Fri Oct 22 Sat Oct 23	8pm 8pm	Theater capacity: 200	No
<b>Dracula School for Vampires</b>	Young Performers Theatre	Sat Oct 23 Sun Oct 24	1pm 1pm, 3:30pm	Theater capacity: 100	No
<b>LIKHA-Philipino Folk Ensemble</b>	Cowell Theater	Sat Oct 23	2pm, 7pm	Theater capacity: 437	No
<b>E2's 10th Anniversary Celebration &amp; Symposium</b>	Cowell Theater	Thu Oct 28	10am-4:30pm	Theater capacity: 400	No
<b>SF Fall Antiques Show</b>	Festival / Firehouse	Wed Oct 27 Thu Oct 28 Fri Oct 29 Sat Oct 30 Sun Oct 31	7pm-10pm 10am-7pm 10am-7pm 10am-7pm 12pm-6pm	1,000 / gala 1,100 / per day	Valet: Lot E, So .Bldg D & E (wed only) Lot E daily
<b>International Vintage Poster Fair</b>	Conference Cneter	Fri Oct 29 Sat Oct 30 Sun Oct 31	5pm-9pm 10am-7pm 11am-6pm	300 / per day	No
<b>Halloween Party 2010</b>	Herbst Pavilion	Sat Oct 30	8pm-1am	1500	No
<b>Dracula School for Vampires</b>	Young Performers Theatre	Sat Oct 30 Sun Oct 31	1pm 1pm, 3:30pm	Theater capacity: 100	No
<b>BATS Improv</b>	Bayfront Theatre	Sat Oct 30 Sun Oct 31	8pm 8pm	Theater capacity: 200	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: November 2010



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>Forensics Computer Expo</b>	Herbst Pavilion	Mon Nov 1 Tue Nov 2	10am-7pm 10am-7pm	750	No
<b>Food Buzz</b>	Herbst Pavilion	Fri Nov 5	6-9pm	300	No
<b>Practice Fusion Conference</b>	Cowell Theater	Fri Nov 5	10:30am-5:30pm	Theater capacity: 437	No
<b>Off The Grid</b>	FMC Parking Lot	Fri Nov 5	5pm-9pm	800	Main Parking lot front of building C
<b>SF Ski &amp; Snowboard Festival</b>	Festival Pavilion	Sat Nov 6 Sun Nov 7	11am-8pm 11am-6pm	3,000	No
<b>Magic Theatre Or</b>	Magic Theatre	Sat Nov 6 Sun Nov 7	8pm 2:30pm	Theater capacity: 168	No
<b>Dracula's School For Vampires</b>	Young Performers Theatre	Sat Nov 6 Sun Nov 7	1pm 1pm, 3:30pm	Theater capacity: 100	No
<b>BATS Improv</b>	Bayfront Theatre	Fri Nov 5 Sat Nov 6	8pm 8pm	Theater capacity: 200	No
<b>US Half Marathon San Francisco</b>	Aquatic Park to Marin County	Sun Nov 7	7:00am-10:00am	<b>High Volume</b>	car entrance to FMC could be impacted as walkers pass by
<b>Cowell Theater West Wave</b>	Cowell Theater	Sun Nov 7 Mon Nov 8	8pm-10pm 8pm-10pm	Theater capacity: 437	No
<b>The Global Summit II</b>	Herbst Pavilion	Mon Nov 8 Tue Nov 9 Wed Nov 10	9am-6pm	250	No
<b>Off The Grid</b>	FMC Parking Lot	Fri Nov 12	5pm-9pm	800	Main Parking lot front of building C
<b>Theatre Flamenco: Una Nota Flamenca</b>	Cowell Theater	Fri Nov 12 Sat Nov 13 Sun Nov 14	8pm 8pm 2:00pm	350	No
<b>Dracula's School For Vampires</b>	Young Performers Theatre	Sat Nov 13 Sun Nov 14	1pm 1pm, 3:30pm	Theater capacity: 100	No
<b>Magic Theatre Or</b>	Magic Theatre	Sat Nov 13 Sun Nov 14	2:30pm , 8pm 2:30pm,	Theater capacity: 320	No
<b>BATS Improv</b>	Bayfront Theatre	Sat Nov 13 Sun Nov 14	8pm 8pm	Theater capacity: 200	No
<b>BCBG &amp; Ella Moss Sample Sale</b>	Fleet Room	Sat Nov 13	10-3pm	200	No
<b>Bay Area Brew Fest</b>	Festival Pavilion	Sat Nov 13 Sun Nov 14	1-4pm	1000	No
<b>Fall Luxury Chocolate Salon</b>	Conference Center	Sun Nov 14	10am-5pm	1,000	No
<b>Sencha Users</b>	Herbst Pavilion	Tues Nov 16	4pm-11pm	500	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: November 2010



<b>North Face Seminar</b>	Cowell Theater	Tues Nov 16	TBD	Theater capacity: 437	No
<b>Pachamama Luncheon</b>	Festival Pavilion	Wed Nov 17	12-3:30pm	2,000	No
<b>Lines Ballet</b>	Cowell Theater	Wed Nov 17 Thur Nov 18	8pm 8pm	Theater capacity: 437	No
<b>SF Peer Resources Conference</b>	Conference Center C Building Fleet Room	Thu Nov 18	8am-5pm	250	No
<b>Off The Grid</b>	FMC Parking Lot	Fri Nov 19	5pm-9pm	800	Main Parking lot front of building C
<b>BevMo! Holiday Beer Fest</b>	Herbst Pavilion	Sat Nov 20	5:30pm-9pm	1000	No
<b>SF Vitners Market</b>	Festival Pavilion	Sat Nov 20 Sun Nov 21	1pm-5pm public 11am-1pm trade/media	3000	No
<b>Encounters: New Moon Silk Road</b>	Cowell Theater	Sat Nov 20 Sun Nov 21	Sat 8pm Sun 3pm	Theater capacity: 168	No
<b>Magic Theatre Or</b>	Magic Theatre	Sat Nov 20 Sun Nov 21	2:30pm , 8pm 2:30pm,	Theater capacity: 168	No
<b>BATS Improv</b>	Bayfront Theatre	Sat Nov 20 Sun Nov 21	8pm 8pm	Theater capacity: 200	No
<b>SF Birth and Baby Fair</b>	Herbst Pavilion	Sun Nov 21	10-5pm	1,000	No
<b>Celebration of Craftswomen</b>	Herbst Pavilion	Sat Nov 27 Sun Nov 28	10-5pm 10-5pm	900	No
<b>Guardzman Christmas Tree Lot</b>	Festival Pavilion	Sat Nov 27 thru Sun Dec 18	open daily	200	No
<b>Magic Theatre Or</b>	Magic Theatre	Sat Nov 27 Sun Nov 28	2:30pm , 8pm 2:30pm,	Theater capacity: 168	No
<b>BATS Improv</b>	Bayfront Theatre	Sat Nov 27 Sun Nov 28	8pm 8pm	Theater capacity: 200	No
<b>San Francisco Crystal Fair</b>	Conference Center	Sat Nov 27 Sun Nov 28	Sat 10-6pm Sun 10-4pm	100	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: December 2010  
 January 2011



Event Title	Venue Location	Event Days	Event Times	Attendance	Parking Services / Lot Staff
<b>Guardman Christmas Tree Lot</b>	Festival Pavilion	Sat Nov 27 thru Sun Dec 18	open daily	200	Reserved parking Lot 1 (east of Bldg. E) Sat Dec 4, Sun Dec 5, Sat Dec 11, Sun Dec 12
<b>CCSF Fort Mason Art Campus Student Art Exhibit &amp; Sale</b>	Bldg. B	Fri Dec 3 Sat Dec 4 Sun Dec 5	Fri 6pm-9pm Sat 11:30-5pm Sun 11:30-5pm	100 / day	No
<b>Celebration of Craftswomen</b>	Herbst Pavilion	Sat Dec 4 Sun Dec 5	10am-5pm 10am-5pm	900	No
<b>BATS Improv</b>	Bayfront Theatre	Fri Dec 3 Sat Dec 4	8pm 8pm	Theater capacity: 200	No
<b>Magic Theatre: Or</b>	Magic Theatre	Fri Dec 3 Sat Dec 4 Sun Dec 5	8pm 2:30pm, 8pm 2:30pm	Theater capacity: 162	No
<b>Hi-Ho Silver</b>	Conference Center Marina Room	Fri Dec 3 Sat Dec 4 Sun Dec 5	11-4pm 10am-4pm 11am-4pm	100 / day	No
<b>City Dance Studios Student Performance</b>	Cowell Theater	Sat Dec 4	8pm	250	No
<b>SF Bay Area Metal Clay Guild Holiday Sale</b>	Gatehouse	Sat Dec 4	10am-5pm	200	No
<b>Gilt City SF Warehouse Sale</b>	Fleet Room	Sat Dec 4	10-6pm	300	No
<b>RISD Holiday Arts &amp; Crafts Sales</b>	Conference Center	Sun Dec 5	9:30am-5pm	300	No
<b>Peter Pan</b>	Young Performers Theatre	Sat Dec 4 Sun Dec 5	1pm, 3:30pm 1pm, 3:30pm	Theater capacity: 100	No
<b>Shecky's Girls Night Out</b>	Herbst Pavilion	Thu Dec 9 Fri Dec 10	5-10pm 5-10pm	200	No
<b>Joyful Noise Lorraine Hansberry</b>	Southside Theater	Fri Dec 10 Sat Dec 11 Sun Dec 12	8pm 8pm 4pm	Theater capacity: 168	No
<b>The Nutcracker City Ballet School</b>	Cowell Theater	Sat Dec 11 Sun Dec 12	7pm 2pm, 7pm 2pm, 7pm	400	No
<b>BATS Improv</b>	Bayfront Theatre	Fri Dec 10 Sat Dec 11	8pm 8pm	Theater capacity: 200	No
<b>Bazaar Bizarre</b>	Herbst Pavilion	Sat Dec 11 Sun Dec 12	12pm-10pm 12pm-6pm	Theater capacity: 437	No
<b>Peter Pan</b>	Young Performers Theatre	Sat Dec 11 Sun Dec 12	1pm, 3:30pm 1pm, 3:30pm	Theater capacity: 100	No
<b>25th Annual Tibet Day</b>	Conference Center	Sat Dec 11	11am-10:30pm	300	No

To: Staff/Residents  
 From: Lisa Phillips  
 Subject: **PARKING IMPACT NOTICE**  
 Date: December 2010  
 January 2011



<b>West Wave</b>	Cowell Theater	Mon Dec 13	8pm	Theater capacity: 437	No
<b>Hi-Ho Silver</b>	Gatehouse	Sat Dec 18 Sun Dec 19	11am-5pm 10am-4pm	100 / day	No
<b>Joyful Noise Lorraine Hansberry</b>	Southside Theater	Fri Dec 17 Sat Dec 18 Sun Dec 19	8pm 8pm 4pm	Theater capacity: 162	No
<b>Yaelisa and Camino</b>	Cowell Theater	Fri Dec 17 Sat Dec 20 Sun Dec 21	8pm 8pm 2pm	Theater capacity: 437	No
<b>Guardsmen Holiday Party</b>	Festival Pavilion	Sat Dec 18	8pm-2am	1500	No
<b>Peter Pan</b>	Young Performers Theatre	Sat Dec 18 Sun Dec 19 Mon Dec 20 Tues Dec 21	1pm, 3:30pm	Theater capacity: 100	No
<b>Joyful Noise Lorraine Hansberry</b>	Southside Theater	Fri Dec 24 Sun Dec 26	2pm 4pm	Theater capacity: 162	No
<b>BATS Improv New Year's EveSpecial</b>	Bayfront Theatre	Fri Dec 31	8-10pm	Theater capacity: 200	No
<b>Joyful Noise Lorraine Hansberry</b>	Southside Theater	Fri Dec 31	2pm 7pm	Theater capacity: 162	No
<b>San Francisco NYE</b>	Festival Pavilion	Fri Dec 31	9pm-2am	2000	No

**JANUARY 2011**

<b>PAWS for Laughter Benefit</b>	Southside Theater	Sat Jan 15	8pm-11pm	162	No
<b>Walk for Life</b>	Festival Pavilion	Sat Jan 22	2pm-5:30pm	5,000	No
<b>Good Eats &amp; Zin</b>	Herbst Pavilion	Thur Jan 27	6pm-9pm	1,200	No
<b>ZAP</b>	Festival Herbst Pavilions	Sat Jan 29	2pm-5pm	7,000	No
<b>Fine Print Fair</b>	Conference Center Building A	Fri Jan 28 Sat Jan 29 Sun Jan 30	6pm-9pm 10am-6pm 11am-5pm	300	No

## **APPENDIX A**

### **Alternatives Considered but Dismissed**

Appendix A summarizes the alternatives considered and dismissed from further analysis. It details the alternatives that were developed during the scoping of this project, graphic representations, and the rationale for dismissal. The section concludes with the screening criteria tables.

## ALTERNATIVES CONSIDERED AND DISMISSED

### In-Street Segment Alternatives Dismissed

#### Alignment Option 1: Promenade and Beach Street

*Description of Alternative.* Alignment Alternative Option 1 would use more of the historic State Belt Railroad alignment than any other of the alternatives. See **Figure A-1** for an illustration of the alignment option.

*Westbound.* This alignment alternative would begin from the existing streetcar tracks at Jefferson Street and Jones Street within the historic State Belt Railroad alignment, and continue westbound on Jefferson Street in a single-track configuration. The alignment option would continue within the historic State Belt Railroad alignment along the Promenade, past the Maritime Museum, through the Fort Mason Tunnel, to a terminal at Fort Mason.

*Eastbound.* In the eastbound direction, this alignment alternative would travel through the Fort Mason Tunnel, and then transition on the east side of the tunnel from the historic State Belt Railroad alignment at Van Ness Avenue southward to Beach Street via one of the transition segment options, through NPS property, in a single track configuration. Alignment Option 1 would continue east on Beach Street, crossing the Hyde Street cable car line at grade, and then rejoin the existing F-line tracks at Beach Street and Jones Street.

*Turnback.* A “turnback” track would be included on Leavenworth Street between Jefferson Street and Beach Street, to allow streetcars to turn back in the event of blockage without affecting streetcars at the F-line terminal on Jones Street.


*Configuration.* Portions of the alternative alignment would be configured to operate either in exclusive or semi-exclusive trackway or in mixed traffic.

*Reasons for Dismissal from Further Study.* Option 1 was not consistent with park management objectives because it would use the waterfront Promenade for its alignment, thereby creating significant affects to the NHLD by splitting the district and introducing new visual elements to the NHLD, as well as creating streetcar conflict with existing high pedestrian and bicycle traffic on the Promenade. The Promenade/Bay Trail through Aquatic Park is also subject to storm wave over wash. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

#### Alignment Option 2: Victorian Park and Beach Street

*Description of Alternative.* Alignment Option 2 is similar to Alignment Option 1 as far as Jefferson Street and Hyde Street in the westbound direction (see **Figure A-1**).

*Westbound.* At Jefferson Street and Hyde Street, instead of continuing on the Promenade, this alternative alignment would leave the historic State Belt Railroad alignment, turn southward and continue at an angle through Victorian Park, reaching Beach Street approximately mid way between Larkin Street and Polk Street, where it would turn westward onto Beach Street. From this point, the alignment would be double track on Beach Street. The double track alignment would continue

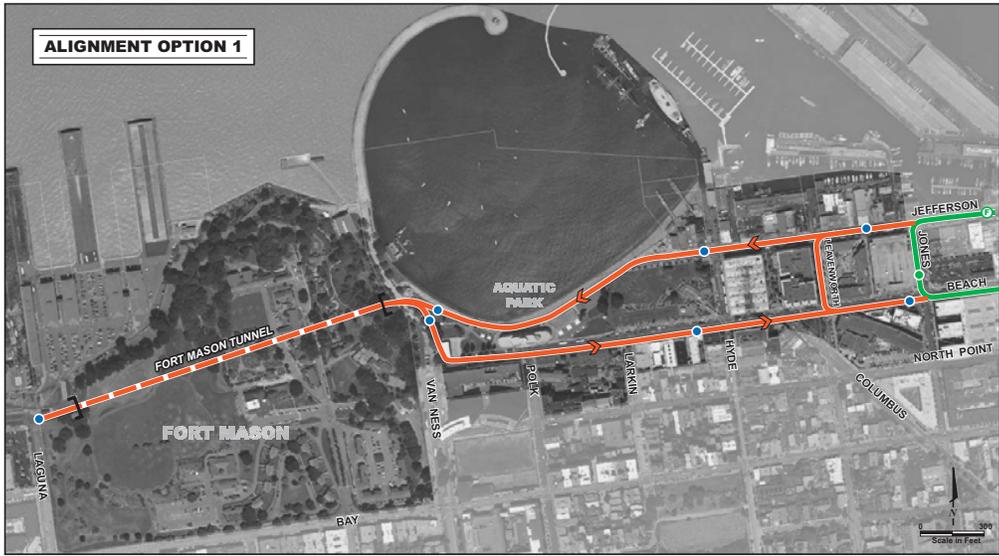

Source: Wilbur Smith Associates, 2004; NPS

**LEGEND**

- F Market (existing)
- Fort Mason Extension (proposed)
- Platform (existing)
- Platform (proposed)



**ALIGNMENT OPTIONS 1, 2 AND 3**  
 Environmental Impact Statement  
 Historic Streetcar Extension  
 San Francisco, California

FIGURE A-1

between Beach Street and the east portal of the Fort Mason Tunnel through NPS property parallel to Van Ness Avenue via one of the transition segment options, switching to single track for the Fort Mason Tunnel, and continuing to a terminal at Fort Mason.

*Eastbound.* In the eastbound direction, the alignment would travel through the Fort Mason Tunnel and then transition from the historic State Belt Railroad alignment at Van Ness Avenue southward to Beach Street in a double-track configuration via one of the transition segment options. The alignment would continue east on Beach Street, crossing the Hyde Street cable car line at grade, and then rejoin the existing streetcar tracks at Beach Street and Jones Street.

*Turnback.* A turnback switch would be provided at the point where the westbound track through Victorian Park meets the eastbound track on Beach Street midway between Larkin Street and Polk Street.

*Configuration.* Portions of the alignment would be configured to operate either in semi-exclusive trackway, or in mixed traffic.

*Reasons for Dismissal from Further Study.* This option resulted in adverse affects to the National Historic Landmark District, by introducing new visual elements to the NHLD. This alignment did not meet park preservation criteria including: the potential to cause a physical effect on Aquatic Park National Historic Landmark District; potential for visual, noise or other impacts to historic and cultural facilities; and the potential to require the use of parkland for a non-park use since the alignment would cut through Victorian Park. This alternative was ultimately dismissed due to its conflict with the purpose and need of the project.

#### **Alignment Option 4: North Point via Tunnel**

*Description of Alternative.* Alignment Option 4 is a streetcar alternative, see **Figure A-2**. This alignment option would provide more avoidance of the park property than Alignment Options 1, 2 and 3. Additionally, this alignment option differs from Alignment Options 1, 2 and 3 in that it would be configured to operate in both directions on North Point Street between Jones Street and Van Ness Avenue and would operate in the Van Ness Avenue ROW between North Point Street and the tunnel.

*Westbound.* This alignment option would begin at Jefferson Street and Jones Street, and turn south onto Jones Street, parallel to the existing F-Line terminal track. The track would continue south on Jones Street to North Point Street, and the alignment option then would turn west onto North Point Street. Because of the existing F-line terminal on Jones Street, this alignment option would require two southbound tracks on Jones Street to allow the Fort Mason streetcars to bypass streetcars at the F-line terminal, and because of track geometry limitations. This alignment option would also require two separate station platforms on Jones Street between Jefferson and Beach Streets, because of the parallel tracks. One platform would be for streetcars terminating at Jones Street and would be located at the curbside on the west side of Jones Street. The second platform would be for streetcars continuing through to Fort Mason. This platform would be located towards the middle of Jones Street.



Source: Wilbur Smith Associates, 2004; NPS

**LEGEND**

F Market (existing)	10-Townsend (existing)
Platform (existing)	Bus Stop (existing)
Fort Mason Extension (proposed)	10-Townsend (proposed)
Platform (proposed)	Bus Stop (proposed)



**ALIGNMENT OPTIONS 4, 4A, AND 5**

Environmental Impact Statement  
Historic Streetcar Extension  
San Francisco, California

FIGURE A-2

The alignment option would then curve west onto North Point Street. The alignment then would continue in a double track configuration on North Point Street to Van Ness Avenue, where the alignment would turn north on Van Ness Avenue. The alignment along Van Ness Avenue switches to single track close to the tunnel portal, and continues through the tunnel to a terminal at Fort Mason.

*Eastbound.* From the terminal at Fort Mason, this alignment option would begin as single track through the tunnel, then switch, double track east of the tunnel portal and would use the same path travelling westbound as far as Jones Street and Beach Street, where the eastbound track turns east onto Beach Street to rejoin the existing streetcar tracks. Portions of the alignment that are in public street ROW could be configured to operate either in semi-exclusive trackway, or in mixed traffic.

***Reasons for Dismissal from Further Study.*** The San Francisco MTA Office of Health and Safety requested the elimination of Alignment Option 4: North Point via Tunnel from further consideration. San Francisco MTA stated that operation of the historic streetcar on Van Ness Avenue between North Point Street and the Fort Mason Tunnel would be “unacceptably hazardous” for a number of reasons, including conflicts with bicycle traffic and other transit operations, historic streetcar capability with regard to street grade, special trackwork and trackwork curvature, loading platforms and operating in mixed traffic (SFMTA 2006). This alternative was ultimately dismissed due to infeasibility.

#### **Alignment Option 4A: North Point via Bay**

***Description of Alternative.*** Alignment Option 4A is a streetcar alternative that responds to a comment card submitted at the May 9, 2006 Public Scoping Meeting that suggested using Bay Street in order to minimize impacts to parkland (see Figure A-2). It is similar to Alignment Option 4 as far as North Point Street and Van Ness Avenue, but differs in that it would not use the Fort Mason Tunnel between Van Ness Avenue and Fort Mason, but instead would use Bay Street.

*Westbound.* This alignment alternative is the same alignment as Alignment Option 4 east of Van Ness Avenue (as described above). From North Point Street and Van Ness Avenue the double track alignment would turn south on Van Ness Avenue to Bay Street, west on Bay Street to Laguna Street, north on Laguna Street to Marina Boulevard, to a terminal at Fort Mason.

*Eastbound.* This alignment option would be double track in configuration, therefore in the eastbound direction, this alignment would use the same path travelling westbound as far as Jones Street and Beach Street, where the eastbound track would then turn east onto Beach Street to rejoin the existing F-Line streetcar tracks. Portions of the alignment that are in public street ROW would be configured to operate either in semi-exclusive trackway, or in mixed traffic.

***Reasons for Dismissal from Further Study.*** This alternative received a very low rating for operability. This alternative posed potential for conflict with major bike or pedestrian flows, and did not directly serve NPS facilities. There was also concern with streetcars stacking up at Jones Street before continuing on to Fort Mason Center. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

### **Alignment Option 5: Motor Coach via Bay**

*Description of Alternative.* Alignment Option 5 is a motor coach alternative that would be an extension of the current Muni 10-Townsend local bus line (see Figure A-2). The 10-Townsend currently operates from the Caltrain Terminal to North Point Street and Van Ness Avenue via Transbay Terminal, and the Sansome/Battery couplet. The buses operate on North Point Street from the Embarcadero to Van Ness Avenue, and terminate on Van Ness Avenue north of North Point Street.

*Westbound.* This alignment would extend the westbound (inbound) 10-Townsend via Van Ness Avenue, Bay Street and Buchanan Street to Fort Mason.

*Eastbound.* In the eastbound direction, the alignment option would travel from Fort Mason onto Marina Boulevard, Laguna Street, Bay Street, Van Ness Avenue, and rejoin the existing 10-Townsend route at Van Ness Avenue and North Point Street.


*Reasons for Dismissal from Further Study.* Option 5 was dismissed during the initial stages of the Feasibility Study because it did not respond to the purpose of the project of providing a mass transit rail connection. This alternative scored low in the alternatives screening for its ability to connect NPS sites directly to traffic generators along the northern waterfront cultural and recreation corridor and would not connect directly to the current historic streetcar. The motor coach alternatives would also be associated with higher air quality impacts which made this alternative less desirable. Another concern with the 10-Townsend is that its schedule is more limited than the F-line, it ends service at 8:00 p.m. There was also a concern that expanding service on the 10-Townsend to match F-Line service would be too costly because transfers from the F-line to the 10 required out of direction movement that would cause drops in ridership and many tourists would not know where to go to make this transfer. Lastly, SFMTA's Transit Effectiveness Project recommendations propose discontinuing the 10-Townsend in the future. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

### **Alignment Option 5A: Motor Coach via Tunnel**

*Description of Alternative.* Alignment Option 5A is a motor coach alternative that would be an extension of the current 10-Townsend local bus line from the current terminal at Van Ness Avenue and North Point Street, similar to Alignment Option 5, except that it would operate via the Fort Mason Tunnel between Van Ness Avenue and Fort Mason instead of Bay Street. **Figure A-3** illustrates Alignment Option 5A. This alignment option would require the installation of two special systems – the first would be a ventilation system in the tunnel that could evacuate the motor coach exhaust to a safe level and maintain the air quality. The second would be a signal system that would control access to the tunnel for buses so that only buses going in one direction could enter the tunnel at a time, and also provide spacing between buses in the same direction. This type of signaling system is common in rail applications, but is not a standard item for motor coach operations.

*Westbound.* This alternative would extend the westbound (inbound) 10-Townsend via Van Ness Avenue continuing northward and through the Fort Mason tunnel, terminating at Fort Mason.

*Eastbound.* In the eastbound direction, the alignment option would be configured to operate in the reverse of the westbound route, as described above.

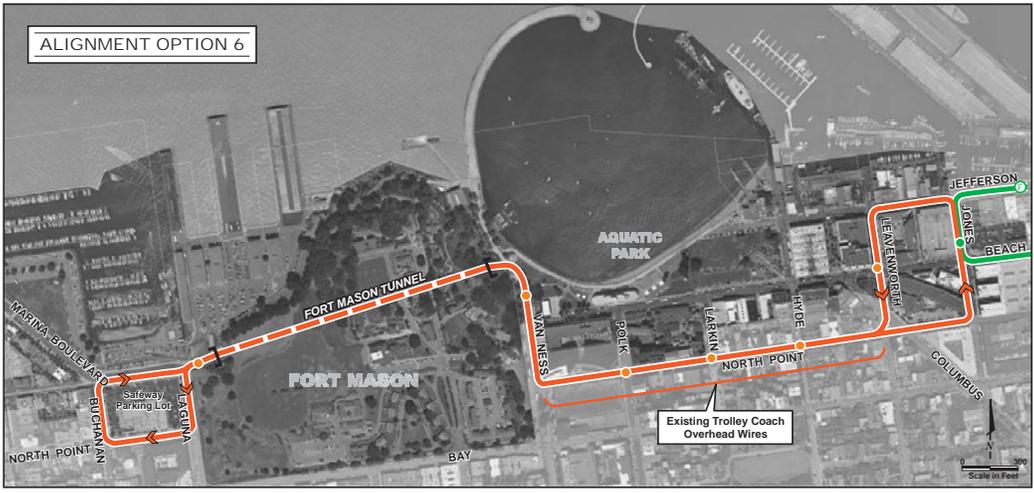

Source: Wilbur Smith Associates, 2004; NPS

**LEGEND**

	10-Townsend (existing)		F Market (existing)
	Bus Stop (existing)		Platform (existing)
	10-Townsend (proposed)		New Trolley Coach Line
	Bus Stop (proposed)		Bus Stop (proposed)



**ALIGNMENT OPTIONS 5A, 6, AND 6A**

Environmental Impact Statement  
Historic Streetcar Extension  
San Francisco, California

FIGURE A-3

***Reasons for Dismissal from Further Study.*** This alternative was rated low in the alternatives screening for its ability to connect NPS sites directly to traffic generators along the northern waterfront cultural and recreation corridor and would not connect directly to the current historic streetcar. This alternative was also rated low for operability. Another concern with the 10-Townsend is that it ends service at 8:00 p.m. Lastly, SFMTA’s Transit Effectiveness Project recommendations propose discontinuing the 10-Townsend in the future. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

#### **Alignment Option 6: Trolley Coach via Tunnel**

***Description of Alternative.*** Alignment Option 6 is a trolley coach alternative that consists of a new trolley coach line connecting to the current F-line at Jones Street and Beach Street, see Figure A-3. This alignment option requires the construction of new overhead trolley coach wire, except where the alignment uses existing trolley coach wire on North Point Street between Columbus Avenue and Van Ness Avenue. Like the Alignment Option 5A, this alignment option would also require a signal system that would control access to the tunnel for buses so that only buses going in one direction could enter the tunnel at a time, and also provide spacing between buses in the same direction.

***Westbound.*** In the westbound direction, the line would operate from the current terminal of the F-line at Jones and Beach Streets via Jones Street, Jefferson Street, Leavenworth Street, North Point Street, and Van Ness Avenue to the Fort Mason Tunnel, and then to a terminal at Fort Mason.

***Eastbound.*** In the eastbound direction, the line would operate the reverse of the westbound route (described above) to North Point Street and Leavenworth Street, and then continue on North Point Street to Jones Street, then via Jones Street to the terminal at Beach Street.

***Reasons for Dismissal from Further Study.*** This alternative did not meet the purpose of the project of providing a mass transit rail connection. It did not meet the purpose and need criteria for its ability to connect NPS sites directly to traffic generators along the northern waterfront cultural and recreation corridor and it does not connect directly to the current historic streetcar, nor would it increase ridership to NPS sites or improve connectivity for transit-dependent residents. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

#### **Alignment Option 6A: Trolley Coach via Bay**

***Description of Alternative.*** Alignment Option 6A is a trolley coach alignment that consists of a new trolley coach line connecting to the current F-line, see Figure A-3.

***Westbound.*** This alignment option is similar to Alignment Option 6 east of Van Ness Avenue, but reaches Fort Mason via Van Ness Avenue, Bay Street, Buchanan Street and Marina Boulevard instead of via the Fort Mason Tunnel.

***Eastbound.*** In the eastbound direction, it would operate via Marina Boulevard, Laguna Street, Bay Street, Van Ness Avenue, and rejoin the existing route at Van Ness Avenue via North Point Street to Jones Street, then via Jones Street to a terminal at Beach Street.

*Reasons for Dismissal from Further Study.* This alternative did not meet the purpose and need criteria for its ability to connect NPS sites directly to traffic generators along the northern waterfront cultural and recreation corridor and it does not connect directly to the current historic streetcar, nor would it increase ridership to NPS sites or improve connectivity for transit-dependent residents. This alternative was ultimately dismissed due to its conflict with the purpose and need of the project.

## **Transition Segment Alternatives Dismissed**

In-street segments 1 and 2 require traversing NPS property between approximately Beach and Polk Streets and the Van Ness Avenue portal of the Fort Mason Tunnel, in an area known as the “transition.”

### **Transition Segment #E-3A (1)**



*Description of Alternative.* Transition Segment Option #E-3A(1) would stretch from the Fort Mason tunnel east portal to Polk Street in an inverted S-curve shape. The design proposes a double-track alignment with an interlocked track at the entrance to the Fort Mason tunnel (**Figure A-4**). This option would accommodate a dual-side platform station, which would be located parallel to the existing retaining wall on the Van Ness Avenue. The existing retaining wall would not be impacted due to the placement of the platforms and the alignment, (unlike Transition Segment Option #2); however, some modifications might be necessary. Under this alignment, the existing bocce court on NPS property (at the western end of Beach Street) would have to be removed and relocated to accommodate the streetcar tracks.

*Reasons for Dismissal from Further Study.* The transition segment #E-3A (1), developed for the Feasibility Study, was refined in consultation with the project’s TAC and other stakeholders. Transition Segment #E-3A (1) and Transition Segment #E-3A(2) were combined, renamed the Transition Segment Area and are now part of the proposed project.

### **Transition Segment #E-3A (2)**

*Description of Alternative.* Transition Segment Option #E-3A(2) would stretch from the Fort Mason tunnel east portal to Polk Street in an inverted S-curve shape. The design proposes a double-track alignment with an interlocked track at the entrance to the Fort Mason tunnel, similar to Option 1 (**Figure A-4**). This option would accommodate a dual-side platform station, which would be located parallel to the existing retaining wall on Van Ness Avenue, north of Option 1 platforms. The existing retaining wall would be substantially impacted due to the platform and alignment design, compared to Transition Segment Option #2. However, the existing bocce court on NPS property (at the western end of Beach Street) would not be removed and relocated.

*Reasons for Dismissal from Further Study.* The transition segment #E-3A (2), developed for the Feasibility Study, was refined in consultation with the project’s TAC and other stakeholders. Transition Segment #E-3A (1) and Transition Segment #E-3A(2) were combined, renamed the Transition Segment Area and are now part of the proposed project.

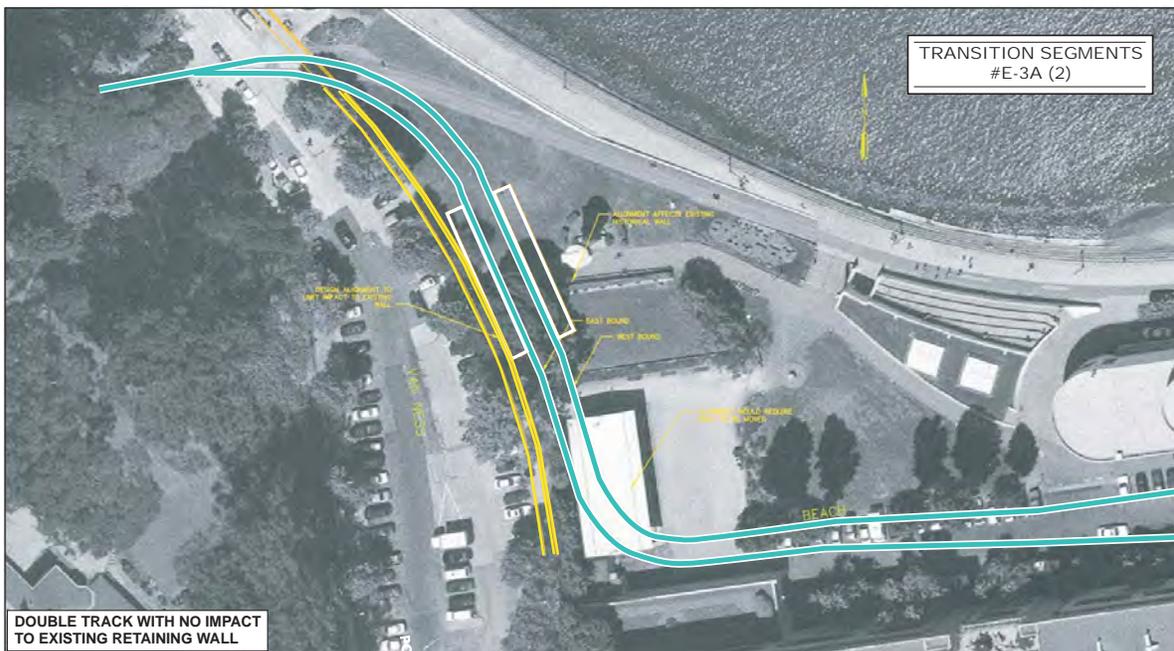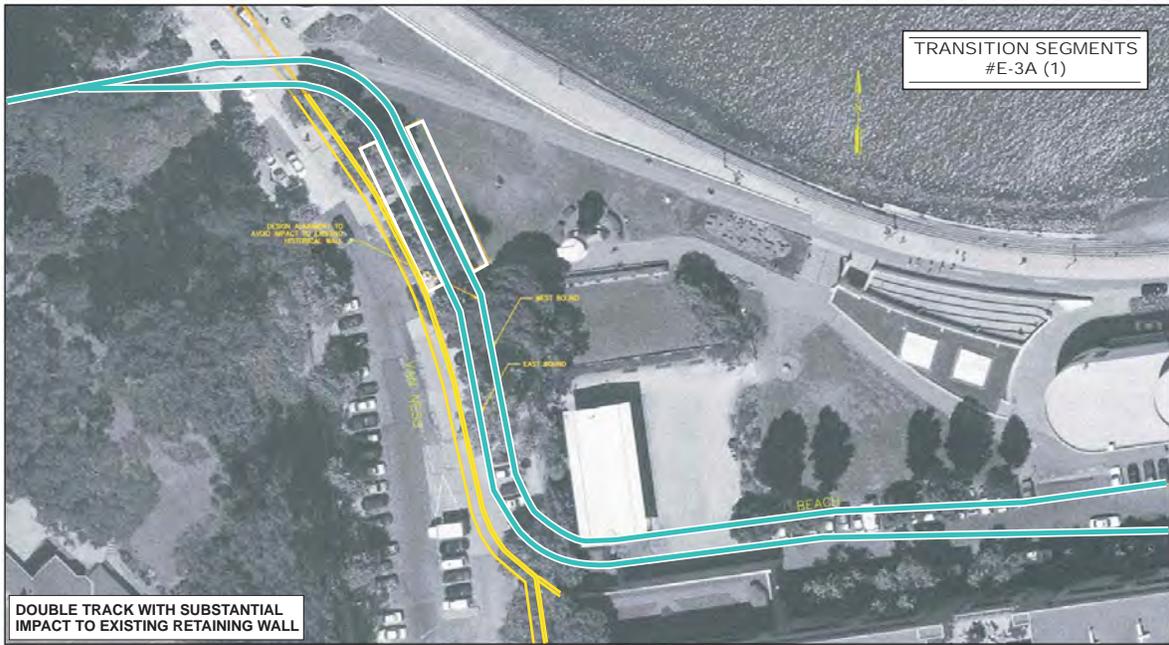

Source: NPS



**TRANSITION SEGMENTS**  
 Environmental Impact Statement  
 Historic Streetcar Extension  
 San Francisco, California

FIGURE A-4

## **Aquatic Park Transition Segment B2**

*Development of Alternative.* This alternative was developed following revisions to the #E-3A (1) and (2). California Public Utilities Commission (CPUC) regulations precluded locating the switch (the transition between double tracks and single tracks) in the sidewalk area due to the high volume of bikes in the area. SFMTA staff suggested that the optimal location would be on the east side of Van Ness Avenue not in the street ROW or in the sidewalk area. SFMTA staff recommended that the westbound platform near Van Ness Avenue be moved to the far side of the walkway so that the platform would be closer to the end of the double track. The NPS preferred to transition the single track east of Van Ness Avenue to avoid intersecting the Bay Trail.

*Reasons for Dismissal from Further Study.* The Transition Option B2 design located the switch on the west side of Van Ness Avenue, the westbound platform was sited inside the contributing area of the Aquatic Park NHL and the tracks intersected with the Bay Trail creating such unsafe conditions for pedestrians and bicycles that a detour of the bay trail was required. Option B2 was not promoted by members of the public or agencies. It did not conform to SFMTA or San Francisco Maritime NHP management objectives and was not supported by the TAC for technical reasons.

## **Turnaround Segment Alternatives Dismissed**


### **Turnaround Option 1: Fort Mason Loop**

*Description of Alternative.* The turnaround option, as shown on **Figure A-5**, would be in the Fort Mason Center parking lot, east of the Fort Mason gates. The turnaround option would operate in a counter-clockwise loop and would bisect the parking control gates as well as cross over the historic trackwork (known as the Ladder Tracks). The turnaround option would have a minimal footprint, in comparison to Turnaround Option 2 and would include a spur track for layovers and storage. The turnaround option includes two platforms: a boarding platform to the east of the storage track, which would be sized for one streetcar, and a passenger drop-off platform on the eastern side of the loop which could accommodate two streetcars.


*Reasons for Dismissal from Further Study.* This alternative presented potential for conflict with automobiles, bicycle or pedestrian flows and had the potential to affect existing park facilities and operations. It was also vulnerable to delay and had potential for interference with traffic flow/patterns in an already congested area. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

### **Turnaround Option 2: Fort Mason Short Loop**


*Description of Alternative.* This Option would be a loop north of the existing trackway, in the current Fort Mason parking lot, but shorter than Option 1, with less room available for cars. One platform would be provided. A storage track would be created extending west from the loop, adjacent to the Guardhouse.

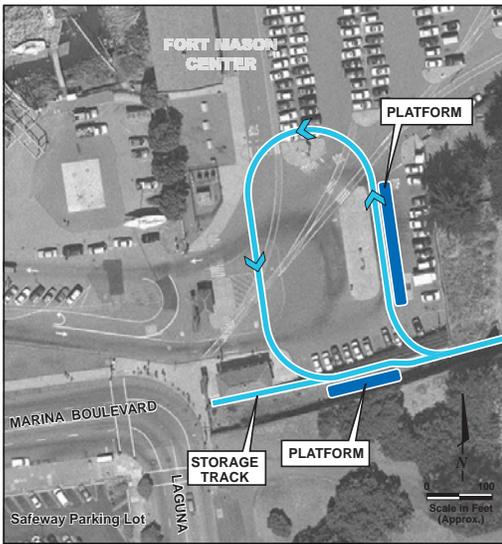


TURNAROUND OPTION 1: FORT MASON LOOP

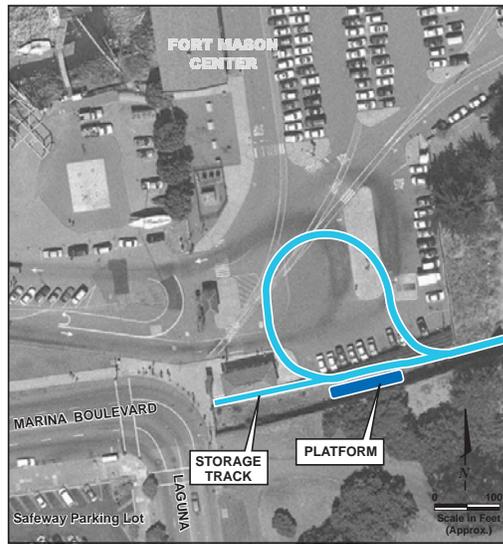


TURNAROUND OPTION 2: FORT MASON SHORT LOOP

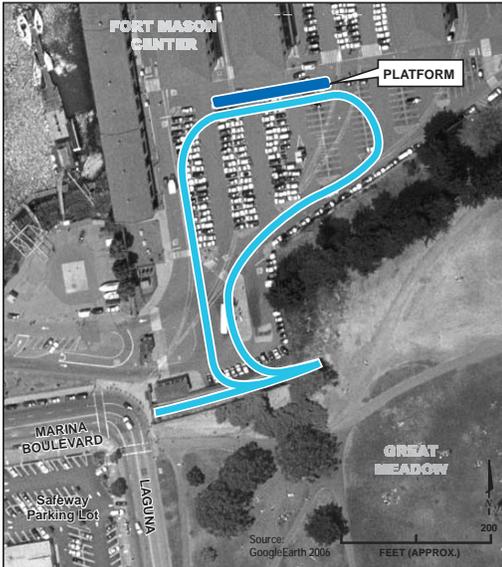

TURNAROUND OPTION 4: EAST-WEST LOOP

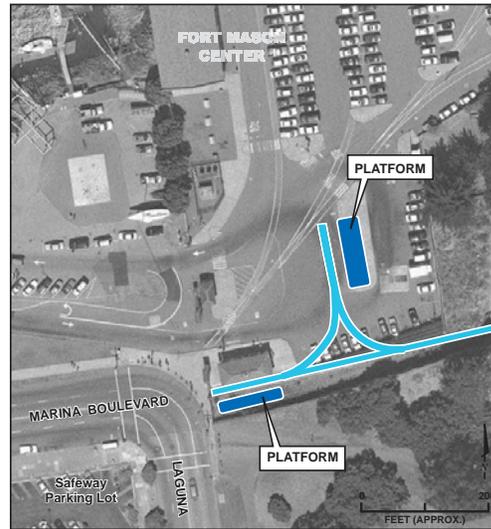

TURNAROUND OPTION 5: NORTH WYE

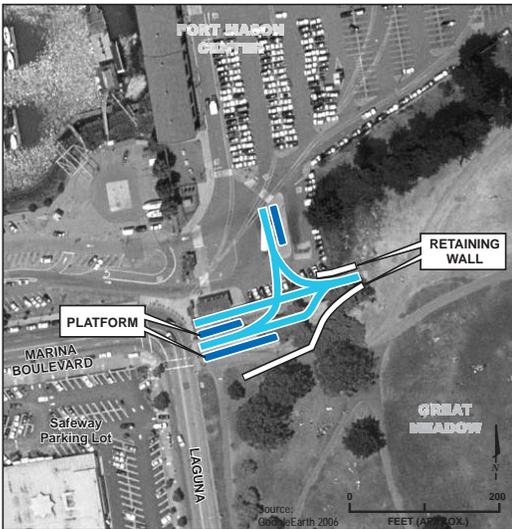

TURNAROUND OPTION 6: NORTH WYE - TWO TRACKS

**TURNAROUND OPTIONS 1, 2, 4, 5, AND 6**

Environmental Impact Statement  
Historic Streetcar Extension  
San Francisco, California



FIGURE A-5

**Reasons for Dismissal from Further Study.** This option lacks an outbound drop off platform and a layover area. This alternative was ultimately dismissed due to operational concerns.

#### **Turnaround Option 4: East-West Loop**

**Description of Alternative.** The turnaround option consists of a large counter-clockwise loop within Fort Mason Center parking lot on NPS property, as shown on Figure A-5. The turnaround option would have one platform and a storage track, which would extend to Laguna Street on the historic State Belt Railroad alignment. In contrast to most of the other turnaround options, the platform would be oriented east-west instead of north-south.

**Reasons for Dismissal from Further Study.** This alternative was rated low because of technical problems and failure to meet park management objectives because of high potential for visual, noise, or other adverse impacts on NHLD; potential for conflict with automobile, bicycles or pedestrian flow; and the utility of turnaround track after extension. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

#### **Turnaround Option 5: North Wye**

**Description of Alternative.** This turnaround option is named for its (“wye”) shaped track north of the main running track, as shown in Figure A-5. The turnaround option would be in the Fort Mason gates on NPS property, and has a minimal footprint that would avoid the historic ladder tracks, but would offer no storage capability. There would be two platforms – one on the historic State Belt Railroad alignment close to Laguna Street for boarding and the other south of the historic ladder tracks for alighting.

**Reasons for Dismissal from Further Study.** This alternative was eliminated from further consideration because the “wye” turnaround options do not meet SFMTA’s operational requirements. Adequate car capacity was a concern with this alternative. Additionally, compared to the terminal loop options, the “wye” configurations would have higher costs associated with the track switch maintenance, and require the streetcars to move through the switches six times (versus two times with a loop option). The increase in movements through the switches would also increase the probability for track switch failure or overhead contact system failure (SFMTA 2009b). This alternative also lacks layover or storage tracks. This alternative was ultimately dismissed due to infeasibility.

#### **Turnaround Option 6: North Wye – Two Tracks**

**Description of Alternative.** This turnaround option is named for its “wye” shaped track north of the main running track, and additional storage track to the south, as shown on Figure A-5. The turnaround option would be in NPS property and would avoid the historic ladder tracks. There would be three platforms associated with this turnaround option: one on the historic State Belt Railroad alignment, adjacent to Laguna Street for boarding, one south of the historic State Belt Railroad alignment, adjacent to Laguna Street for boarding, and one on the northern tip of the “wye” shaped track for alighting. The existing retaining wall on the southern side will need to be moved to accommodate the third track. The turnaround option would require a retaining wall and additional earth-moving activities to accommodate the second track. This option differs from Turnaround Option 5 in that it would allow for an extra car at the terminal.

***Reasons for Dismissal from Further Study.*** This alternative was eliminated from further consideration because the “wye” turnaround options do not meet SFMTA’s operational requirements. Additionally, compared to the terminal loop options, the “wye” configurations would have higher costs associated with the track switch maintenance, and require the streetcars to move through the switches six times (versus two times with a loop option). The increase in movements through the switches would also increase the probability for track switch failure or overhead contact system failure (SFMTA 2009b). This alternative was ultimately dismissed due to infeasibility.

#### **Turnaround Option 7: South Wye**


***Description of Alternative.*** This turnaround option is named for its “wye” shaped track to the south of the main running track, as shown on **Figure A-6**. The turnaround option would be on NPS property and would not have a storage track. There would be two platforms, one on the historic State Belt Railroad alignment adjacent to Laguna Street for alighting; the other would be on the southern tip of the “wye” shaped track for boarding. This option would require a curved retaining wall across the existing Bay Trail. Considerable earth moving and grade change would be required.

***Reasons for Dismissal from Further Study.*** This alternative was eliminated from further consideration because the “wye” turnaround options do not meet SFMTA’s operational requirements. Additionally, compared to the terminal loop options, the “wye” configurations would have higher costs associated with the track switch maintenance, and require the streetcars to move through the switches six times (versus two times with a loop option). The increase in movements through the switches would also increase the probability for track switch failure or overhead contact system failure (SFMTA 2009b). This option also lacks a layover area, storage tracks, and does not have enough room if a car needed to be towed. This alternative was ultimately dismissed due to infeasibility.


#### **Turnaround Option 9: Fort Mason Gate Loop**

***Description of Alternative.*** This turnaround option is a counter-clockwise loop using the Gas House Cove parking lot for both directions and going through the Fort Mason gates, as shown on **Figure A-6**. This turnaround option would not be on NPS property but would offer storage capability for a streetcar through a double-track design on the northern side of the loop. There would be one platform on the northern side of the loop for boarding and alighting.


***Reasons for Dismissal from Further Study.*** This alternative was rated low for failing to meet the following park management criteria: sensitivity of resources; potential for conflict with automobile, bicycle or pedestrian flows; affect on existing park facilities and operations. In addition it was rated low for loss of parking as it would cut through a large section of parking spaces at Fort Mason and public safety. This option is lacking a second platform for loading or needs a layover area. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

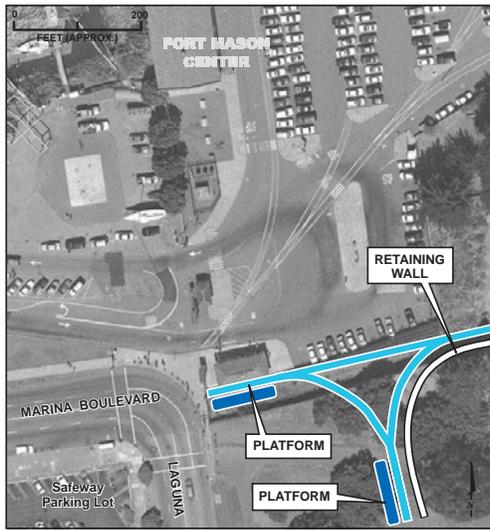

TURNAROUND OPTION 7: SOUTH WYE

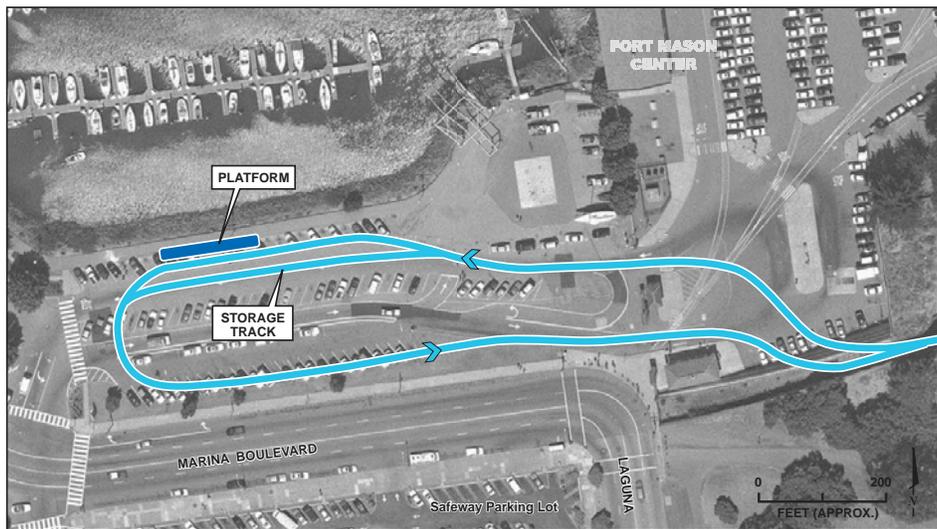

TURNAROUND OPTION 9: FORT MASON GATE LOOP

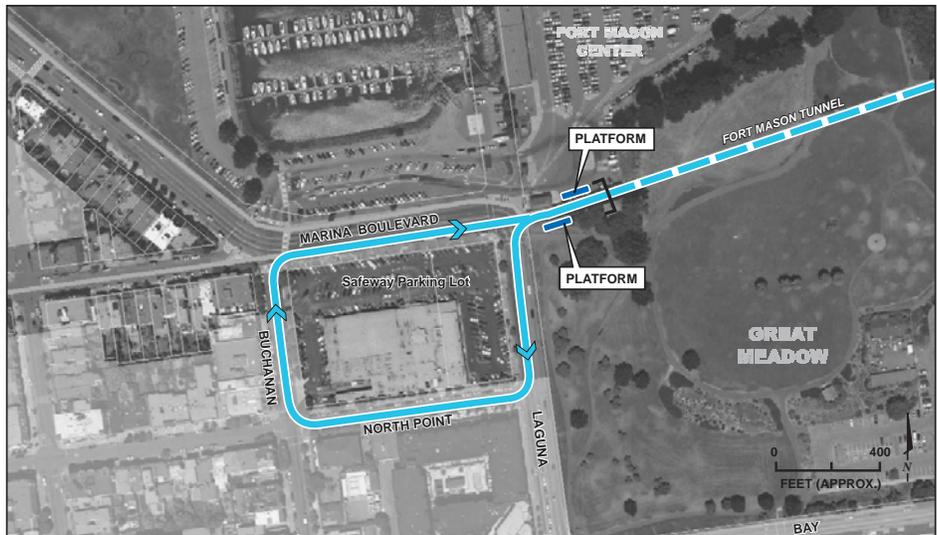

TURNAROUND OPTION 10: SAFEWAY LOOP

**TURNAROUND OPTIONS 7, 9, AND 10**

Environmental Impact Statement  
 Historic Streetcar Extension  
 San Francisco, California



FIGURE A-6

### **Turnaround Option 10: Safeway Loop**

*Description of Alternative.* This turnaround is a clockwise loop around the Safeway block within city street ROWs (Laguna Street, North Point Street, Buchanan Street, and Marina Boulevard), as shown on Figure A-6. This turnaround option does not include a storage track. Two platforms would be on the NPS property on the historic State Belt Railroad alignment, adjacent to Laguna Street. This option would require the installation of a rail-to-rail crossing at the intersection of Marina Boulevard and Laguna Street.

*Reasons for Dismissal from Further Study.* This option did not provide direct access to Fort Mason. Potential problems with this alternative included traffic delays caused by Safeway delivery trucks on North Point Street behind Safeway and by mail delivery trucks blocking Buchanan Street. This alternative was dismissed based on a low rating in the screening process. This option lacks storage tracks. This alternative was ultimately dismissed due to both infeasibility and its conflict with the purpose and need of the project.

### **Turnaround Option 11: Marina Loop**


*Description of Alternative.* This turnaround option was initially presented at the public scoping meeting as Turnaround Option 2. The turnaround option would be a counter-clockwise loop using Gas House Cove parking lot (outbound), with inbound track on south side of Marina Boulevard (Figure A-7). The turnaround option would include a double track storage track on the northern side of the loop. There would be two platforms – one on the northern side of the loop and one on the south side of the loop near the corner of Marina Boulevard and Laguna Street. This design option would require the installation of switches and rail to rail crossings at the intersection of Marina Boulevard and Laguna Street; it would also require a signal at the intersection of Marina Boulevard and Buchanan Street, for the streetcars to exit the Gas House Cove parking lot.

*Reasons for Dismissal from Further Study.* This alternative was dismissed based on a low rating because it failed to meet park management objectives. This option resulted in adverse affects to the National Historic Landmark District, by introducing new visual elements to the NHL. This alternative also had public safety concerns, loss of parking and low public support. This alternative was ultimately dismissed due to its conflict with the purpose and need of the project.


### **Turnaround Option 12: Small Marina Loop**

*Description of Alternative.* This turnaround option is a clockwise loop that would use the northern side of Marina Boulevard for outbound direction, with a loop in Gas House Cove parking lot, as shown on Figure A-7. This turnaround option would not be on NPS property. A storage track would be to the north of the platform. The turnaround option would require the installation of switches at the intersection of Marina Boulevard and Laguna Street, and would require streetcars to run reverse to the street traffic on Marina Boulevard for a short segment, protected by all-way red signals.


*Reasons for Dismissal from Further Study.* This alternative received a low rating in the screening process. This alternative also had public safety concerns, loss of parking and low public support. In addition, having only one platform in this option presents a problem with streetcar layover. This alternative was ultimately dismissed due to its conflict with the purpose and need of the project.

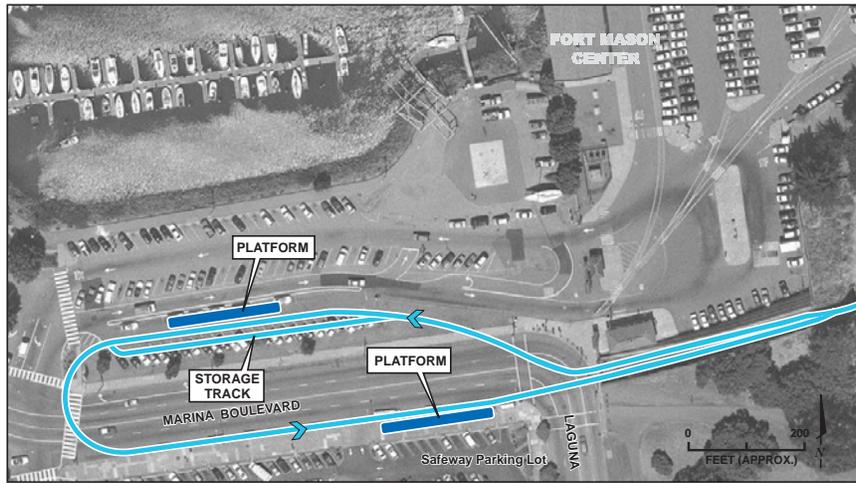

TURNAROUND OPTION 11: MARINA LOOP

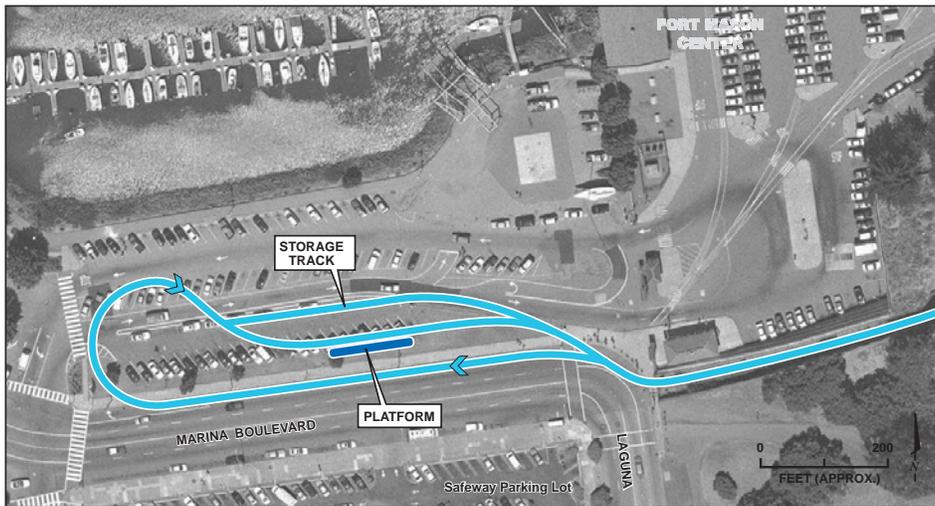

TURNAROUND OPTION 12: SMALL MARINA LOOP

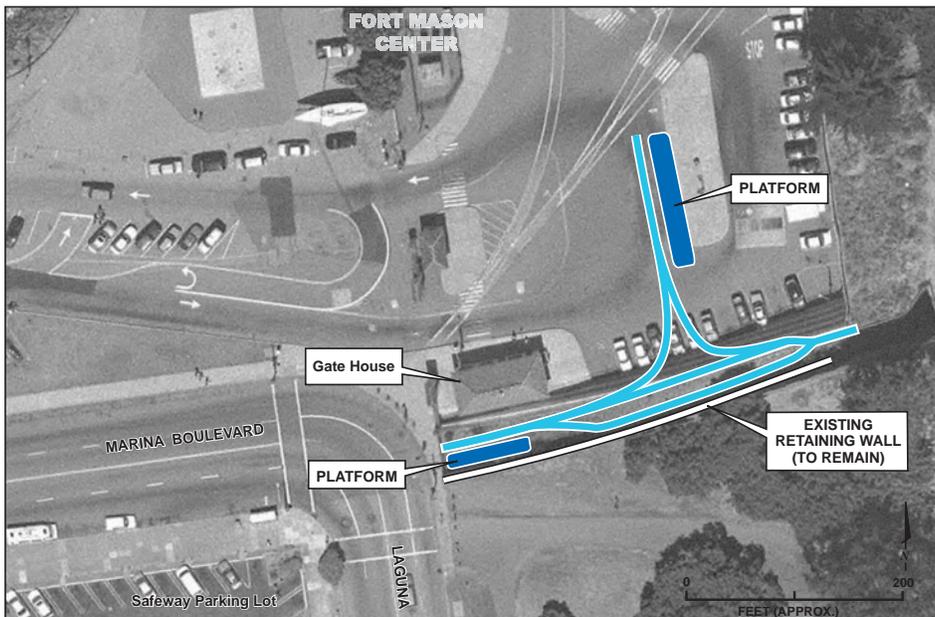

TURNAROUND OPTION RL: MODIFIED NORTH WYE - TWO TRACKS

**TURNAROUND OPTIONS 11, 12, AND RL**

Environmental Impact Statement  
 Historic Streetcar Extension  
 San Francisco, California



FIGURE A-7

### **Fort Mason Turnaround: Modified North Wye – Two Tracks – Option RL**

*Description of Alternative.* This turnaround option is a slightly modified version of Turnaround Option 6: North Wye – Two Tracks (see Figure A-7). The turnaround option would be a “wye” shaped track to the north of running track, with a separate double-sided turnaround or storage track to the south of the main track. Compared to Turnaround Option 6, the retaining wall would be in a different location stretching south of the tracks. The platform configuration for this turnaround option is less confusing for passengers than Turnaround Option 6. This turnaround option would be on NPS property and designed to avoid the historic ladder tracks. It requires some earth-moving to expand the ROW to accommodate a second track. It could also affect the Bay Trail.

*Reasons for Dismissal from Further Study.* This alternative was eliminated from further consideration because the “wye” turnaround options do not meet SFMTA’s operational requirements. Additionally, compared to the terminal loop options, the “wye” configurations would have higher costs associated with the track switch maintenance, and require the streetcars to move through the switches six times (versus two times with a loop option). The increase in movements through the switches would also increase the probability for track switch failure or overhead contact system failure (SFMTA 2009b). This alternative was ultimately dismissed due to infeasibility.

This page intentionally left blank

Screening Process - Initial Screen				Streetcar Options				Motor Coach Options		Trolley Coach Options			
Category	Criteria	Measurement	Comment	Option 1 - Promenade Beach	Option 2 - Vict Park Beach	Option 3 - Beach 2-Way	Option 4 - No Pt to Tunnel	Option 4A - No Pt to Bay	Option 5 - Motor Coach via Bay	Option 5A - Motor Coach via Tunnel	Option 6 - Trolley Coach via Tunnel	Option 6A - Trolley Coach via Bay	Comment
<b>Graded Criteria</b>													
1	Purpose and Need	Connect NPS sites directly to traffic generators along Northern Waterfront Cultural and Recreational Corridor	Directly connect NPS sites (Alcatraz Boats, Hyde Street Pier, Argonaut Hotel/Visitor Center, Maritime Museum, Aquatic Park, Municipal Pier, Fort Mason Center) with following traffic generators within 1/2 block of alignment - AT&T Park, Pier 40 Watersports Center, Ferry Building, Pier 7, Pier 27-31, Pier 39, Tour Boats, Cable Cars.	High/Medium/Low	●	●	●	○	○	○	○	○	
					3	3	3	2	1	1	1	1	
2	Purpose and Need	Potential ridership increase	Potential for increased ridership to NPS sites.	High/Medium/Low	●	●	●	●	●	○	○	○	
					3	3	3	3	2	2	1	1	
3	Purpose and Need	Connectivity with regional transit services	Number of regional transit connections within 1/2 block of alignment - Caltrain Terminal, Ferry Building, BART, Transbay Terminal	High (3), Med (2), Low (1)	●	●	●	●	●	●	○	○	
					3	3	3	3	3	3	1	1	
4	Purpose and Need	Improved connectivity for transit-dependent residents	Number of Muni lines connected to Northern Waterfront with one transfer	High (30+ lines), Medium (20-30), Low (Less than 20)	●	●	●	●	●	●	○	○	
					3	3	3	3	3	3	1	1	
5	Purpose and Need	Historic Infrastructure	Project incorporates historic rail infrastructure	High/Low	●	●	●	○	○	○	●	○	
					3	3	3	1	1	3	3	1	Wording modified to address SFCTA issue.
6	Purpose and Need	Local transit access	Project provides enhanced local transit access for residents to downtown	High/Medium/Low	○	○	○	○	●	○	○	○	Added to address SFCTA comment.
					2	2	2	2	3	3	2	1	
7	Purpose and Need	Connectivity with current historic streetcar service	Transfers required to access F-line	High/Low	●	●	●	●	○	○	○	○	
					3	3	3	3	1	1	1	1	
<b>Purpose and Need Subtotal</b>				Score	20	20	20	19	17	14	15	9	7
				Total Possible	21	21	21	21	21	21	21	21	
				Percent	95%	95%	95%	90%	81%	67%	71%	43%	33%
8	Park Preservation	Impact on NHL Resources	Potential to cause a physical effect on Aquatic Park National Historic Landmark District	High/Medium/Low	○	○	○	●	●	●	●	●	Added to address NPS/SFMNHP comment
					1	1	1	3	3	3	3	3	
9	Park Preservation	Impact on the existing historic and cultural setting	Potential for visual, noise or other impacts on historic and cultural facilities.	High/Medium/Low	○	○	○	○	●	○	○	○	
					1	1	1	2	3	3	1	2	3
10	Park Preservation	4-F impact	Potential to require the use of parkland for a non-park use.	High/Medium/Low	○	○	○	●	●	○	○	○	
					1	1	2	3	3	3	2	2	3
11	Park Preservation	Access to NPS facilities	Project directly serves NPS sites with no barriers or grades for elderly/disabled access.	High/Medium/Low	●	●	●	○	○	○	○	○	
					3	3	3	1	1	2	2	1	
12	Park Preservation	Bike and Pedestrian Impacts	Potential for conflict with major bike or pedestrian flows.	High/Medium/Low	○	○	○	○	○	○	○	○	
					1	1	2	2	1	3	2	2	3
13	Park Preservation	Minimize air quality impacts	Operates with electrically-powered vehicles or other zero-emission vehicles	High/Low	●	●	●	●	○	○	○	○	
					3	3	3	3	1	1	3	3	
<b>Park Preservation Subtotal</b>				Score	10	10	12	16	14	11	14	16	
				Total Possible	18	18	18	18	18	18	18	18	
				Percent	56%	56%	67%	89%	78%	61%	78%	89%	
14	Operability	Engineering - Street grade	Grades between 6% and 9% not desirable for rail. Grades between 3% and 6% more desirable. Grades less than 3% most desirable	High/Medium/Low	○	○	○	○	○				
					2	2	2	1	1				
15	Operability	Engineering - Curves and Specialwork	Complex trackwork not desirable. Specialwork on steep grades not desirable. Curves on steep grades not desirable.	High/Medium/Low	●	●	○	○	○				
					3	3	2	1	1				
16	Operability	Maximize separate right-of-way for transit	Measurement of mileage operating in a separate off-street right-of-way	High - 50% or more, Medium 25-50%, Low - less than 25% in PRW	●	●	○	○	○	○	○	○	
					3	3	2	2	1	1	3	2	1
17	Operability	Arterial traffic	Ability to create reserved ROW within street ROW for separation from arterial traffic.	High/Medium/Low	●	●	○	○	○	○	○	○	
					3	3	2	1	1	1	1	1	
18	Operability	Minimize operating cost impacts	Estimated incremental additional operating cost for each alternative over current system	High/Medium/Low	●	●	○	○	○	○	○	○	
					3	3	3	2	1	1	1	1	
19	Operability	Service design	Adheres to Muni Service Planning guidelines - fits in overall route network structure, straight line routes, minimize use of single-purpose shuttles, both directions same location	High/Medium/Low	○	○	○	○	○	○	○	○	
					2	2	3	1	1	3	2	1	1
20	Operability	Legibility of service structure	Minimize out of direction travel.	High/Medium/Low	●	●	●	○	○	○	○	○	
					3	3	3	1	1	3	2	1	1
21	Operability	Conflict with other transit operations	Minimize conflicts with other transit modes, operations and terminals. Minimize necessity to move other transit operations to accommodate project.	High/Medium/Low	●	●	○	○	○	○	○	○	
					3	3	2	1	1	2	2	1	1
22	Operability	Surface operational safety	Surface operational safety is not compromised by any operating condition, or combination of conditions.	High/Medium/Low	○	○	○	○	○	○	○	○	
					2	2	3	1	2	3	3	3	Added to address Muni comment
23	Operability	Tunnel Operational Safety	Secure method for controlling operation in tunnel, and restricting non-transit vehicle access into tunnel.	High/Medium/Low	●	●	●	○		○	○	○	
					3	3	3	3		1	2	2	
<b>Operability Subtotal</b>				Score	27	27	25	14	10	14	15	12	9
				Total Possible	30	30	30	30	27	21	24	21	
				Percent	90%	90%	83%	47%	37%	67%	63%	50%	
<b>TOTAL</b>				Score	57	57	57	49	41	42	41	35	32
				Total Possible	69	69	69	69	66	60	63	60	
				Percent	83%	83%	83%	71%	62%	70%	65%	56%	

THIS PAGE INTENTIONALLY LEFT BLANK

Table A-2 Turnaround Options Screening

HISTORIC STREETCAR EXTENSION EIS  
Preliminary Screening of Terminal Alternatives  
July 11, 2007

Maximum score / criterion = 5

Estimated quantitative or un-measured ratings

SCREENING CRITERIA FOR TERMINAL OPTIONS					Within Fort Mason gates						Within NPS property			Other				Comments
#	Category	Criterion	Measurement	Range	1	2	3	4	5	RL	6	7	8	10	11	12	13	
					Fort Mason Loop	Fort Mason Short Loop	Bldg A Loop	East-West Loop	North Wye	Modified North Wye: 2 tracks	North Wye: 2 tracks	South Wye	Great Meadow Loop	F Mason Gate Loop	Safeway Loop	Marina Loop	Small Marina Loop	
<b>PURPOSE AND NEED : Criteria relating to the established Need and Purpose for the project</b>																		
1	Purpose and Need	Potential ridership increase	Potential for increased ridership to SAFR and GGNRA	1 = Low potential 5 = High potential	4	4	5	5	4	4	4	3	3	2	2	2	2	
2	Purpose and Need	Local transit access	Project provides enhanced local transit access for residents	1 = Poor access 5 = High access	3	3	3	3	3	4	4	4	4	4	5	4	4	
3	Purpose and Need	Fort Mason access	Provides direct access for visitors, residents, and employers at/to Fort Mason Center, regardless of personal physical mobility	1 = Poor access 5 = High access	4	4	5	5	3	3	3	2	2	2	1	2	2	
		<b>Subtotal:</b>	<b>PURPOSE AND NEED</b>	Score	11	11	13	13	10	11	11	9	9	8	8	8	8	
				Total Possible	15	15	15	15	15	15	15	15	15	15	15	15	15	
				Percent	73%	73%	87%	87%	67%	73%	73%	60%	60%	53%	53%	53%	53%	
<b>COMPATIBILITY WITH PARK ACTIVITIES AND RESOURCES : Criteria relating to the various objectives of the National Park Service in owning and operating the national parks through which this project passes</b>																		
4	Park Preservation	NHPA Section 106	Potential for visual, noise, or other adverse impacts on NHLD.	1 = High impact 5 = Minimal impact	3	2	1	1	3	3	2	5	5	3	4	4	4	
5	Park Preservation	US DOT Section 4F	Potential for harm to recreational resources.	1 = High impact 5 = Minimal impact	4	4	4	4	4	4	4	2	1	3	5	3	3	Note - does not include impacts to NPS or other parking areas as a recreational resource. Parking evaluated in Category 19.
6	Park Preservation	US DOT Section 4F	Sensitivity of resources	1 = High sensitivity 5 = Minimal sensitivity	4	4	3	3	4	4	4	2	2	1	5	3	3	Need clarification from NPS (Nancy Horner) as to what 'sensitivity' means in this context
7	Park Preservation	US DOT Section 4F	Alteration of physical boundaries that define the edges of the NHLD	1 = High impact 5 = Minimal impact	5	5	5	5	4	3	3	1	1	4	5	5	5	
8	Park Preservation	Bike and ped impacts	Potential for conflict with automobile, bicycle or pedestrian flows	1 = High impact 5 = Minimal impact	1	2	1	1	3	3	3	1	1	1	1	1	1	
9	Park Preservation	Park facilities impacts	Affects existing park facilities and operations (GGNRA)	1 = High impact 5 = Minimal impact	1	2	1	1	4	4	4	4	4	1	5	3	2	
		<b>Subtotal:</b>	<b>COMPATIBILITY WITH PARK ACTIVITIES AND RESOURCES</b>	Score	18	19	15	15	22	21	20	15	14	13	25	19	18	
				Total Possible	30	30	30	30	30	30	30	30	30	30	30	30	30	
				Percent	60%	63%	50%	50%	73%	70%	67%	50%	47%	43%	83%	63%	60%	
<b>OPERABILITY : Criteria relating to the technical capabilities and limitations of the transit vehicles and infrastructure proposed for use in the various alternatives, and criteria relating to the objectives of the MTA/Municipal Railway in operating the system</b>																		
10	Operability	Engineering - Street grade	Grades between 6% and 9% not desirable for rail. Grades between 3% and 6% more desirable. Grades less than 3% most desirable.	1 = Grade of 6% and more 3 = Grade of 3% to 5% 5 = Grade of 2% or less	5	5	5	5	5	5	5	3	3	5	5	5	5	
11	Operability	Engineering - Curves and Specialwork	Complex trackwork not desirable. Specialwork on steep grades not desirable. Curves on steep grades not desirable.	1 = Large amount of curves and specialwork 5 = Minimal amount of curves and specialwork	4	4	4	4	3	1	2	3	4	4	2	4	4	
12	Operability	Maximize separate ROW for transit	Measurement of mileage operating in a separate off-street right-of-way	1 = Less than 25% in PRW 3 = 25 to 50% in PRW 5 = 50% or more in PRW	3	3	3	3	4	4	4	5	5	2	1	1	1	
	Operability	Operational flexibility and efficiency	Ability to store vehicles, serve large events, vary order of dispatch, maintain headways	1 = Low flex / eff 5 = High flex / eff	3	2	5	5	2	3	3	2	5	5	4	5	5	Need to refine definition and understanding of each alternative's attributes
13	Operability	Minimize operating cost impacts	Estimated incremental additional operating cost for each alternative over current system	1 = High (estimated) operating cost 5 = Low (estimated) operating cost	4	4	4	4	3	3	3	3	4	2	1	2	2	

THIS PAGE INTENTIONALLY LEFT BLANK

Table A-2 Turnaround Options Screening

**HISTORIC STREETCAR EXTENSION EIS**  
**Preliminary Screening of Terminal Alternatives**  
**July 11, 2007**

Maximum score / criterion = 5

Estimated quantitative or un-measured ratings

SCREENING CRITERIA FOR TERMINAL OPTIONS					Within Fort Mason gates						Within NPS property			Other				Comments
#	Category	Criterion	Measurement	Range	1	2	3	4	5	RL	6	7	8	10	11	12	13	
					Fort Mason Loop	Fort Mason Short Loop	Bldg A Loop	East-West Loop	North Wye	Modified North Wye: 2 tracks	North Wye: 2 tracks	South Wye	Great Meadow Loop	F Mason Gate Loop	Safeway Loop	Marina Loop	Small Marina Loop	
14	Operability	Service design	Adheres to Muni Service Planning guidelines fits in overall route network structure, straight line routes, minimize use of single-purpose shuttles, both directions same location	1 = Low adherence 5 = High adherence	3	2	4	4	2	3	3	2	4	3	3	3	3	
15	Operability	Surface operational safety	Surface operational safety of streetcar system is not compromised by any operating condition or combination of conditions	1 = Low safety levels 5 = High safety levels	3	3	4	4	3	3	3	3	4	2	2	2	2	
16	Operability	Vulnerability to delay	Susceptibility to potential streetcar delays from interference with internal circulation and parking (i.e., within Fort Mason)	1 = High susceptibility 5 = Low susceptibility	1	1	2	2	4	4	4	5	5	2	2	2	2	
<b>Subtotal: OPERABILITY</b>				Score	26	24	31	31	26	26	27	26	34	25	20	24	24	
				Total Possible	40	40	40	40	40	40	40	40	40	40	40	40	40	
				Percent	65%	60%	78%	78%	65%	65%	68%	65%	85%	63%	50%	60%	60%	
<b>LOCAL CONSIDERATIONS : Criteria involving how the proposed terminal would be integrated with the adjacent neighborhoods and local plans and policies</b>																		
17	Local considerations	Impacts on neighboring uses	Potential for visual, noise, vibration, or other impacts on nearby residents and businesses	1 = High impact 5 = Minimal impact	4	4	4	4	3	3	3	2	2	2	1	2	2	
18	Local considerations	Interference with street traffic	Interference with traffic flow/patterns in an already congested area	1 = High degree of interference 5 = Low degree of interference	1	2	2	2	4	4	4	5	5	2	1	2	2	
19	Local considerations	Impact on parking	Results in loss of parking - either in lots or on-street	1 = High impact 5 = Minimal impact	2	2	2	2	4	3	3	5	5	1	1	1	1	
20	Local considerations	Plan consistency	Conformance with existing local plans and policies (i.e., GGNRA, city plans and policies)	1 = Inconsistent 5 = Consistent	3	3	3	3	3	3	3	2	2	1	1	1	1	
21	Local considerations	Adaptability	Adaptability for extension beyond Fort Mason; utility of turnaround trackage after extension; no extraneous or redundant trackwork	1 = Low 5 = High	2	2	1	1	4	4	5	4	1	3	2	3	3	
22	Local considerations	Impacts on landscape	Changes required to physical landscape (grading, fill removal)	1 = High (estimated) cost 5 = Low (estimated) cost	4	4	4	4	4	2	2	2	1	4	4	4	4	
23	Local considerations	Public safety	Public safety, including access for emergency vehicles. Ability to access Fort Mason facilities by emergency vehicles.	1 = Low safety levels 5 = High safety levels	3	4	3	2	5	5	5	5	5	1	2	1	1	
24	Local considerations	Public opinion	Estimated community support for terminal alternative	1 = Low 5 = High	4	2	4	4	4	3	3	1	1	1	1	1	1	
<b>Subtotal: LOCAL CONSIDERATIONS</b>				Score	23	23	23	22	31	27	28	26	22	15	13	15	15	
				Total Possible	40	40	40	40	40	40	40	40	40	40	40	40	40	
				Percent	58%	58%	58%	55%	78%	68%	70%	65%	55%	38%	33%	38%	38%	
<b>TOTAL</b>					Score	78	77	82	81	89	85	86	76	79	61	66	66	65
					Total Possible	125	125	125	125	125	125	125	125	125	125	125	125	
					Percent	62.4%	61.6%	65.6%	64.8%	71.2%	68.0%	68.8%	60.8%	63.2%	48.8%	52.8%	52.8%	52.0%
<b>Score Ranges</b>					<b>70 % +</b>	<b>65-69.9 %</b>		<b>60-64.9 %</b>		<b>55-59.9 %</b>			<b>&lt; 55%</b>					

THIS PAGE INTENTIONALLY LEFT BLANK

## **APPENDIX B**

### **Transportation and Circulation**

Appendix B includes traffic turning movement counts at intersections in the project area and level of service calculation sheets.

This page intentionally left blank

## TRANSPORTATION-CIRCULATION

### Traffic Turning Movement Counts at Intersections in the Project Area

- A. Study Intersections (Weekday and Weekend Peak Periods)
  - 1. Jefferson Street and Jones Street
  - 2. Beach Street and Jones Street
  - 3. Beach Street and Hyde Street
  - 4. Jefferson Street and Leavenworth Street
  - 5. Beach Street and Leavenworth Street
  - 6. Beach Street and Larkin Street
  - 7. Beach Street and Polk Street
  - 8. Beach Street and Columbus Avenue
  
- B. Embarcadero and Bay Street (used to set seasonal adjustment factor)

Intersection: **Jones**  
 Direction: N / S <= Pick => E / W  
 Time Period: **4 P-6 P**

**Jefferson**  
 N / S <= Pick => E / W

Date: **January 16, 2008** **Wednesday**

Project: 100368 E Line SF

**INPUTS**

Labels =>

15-min period Ending Time
4:15
4:30
4:45
5:00
5:15
5:30
5:45
6:00

15-min period Ending Time	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	L-tram	
4:15	15												13	42	2	
4:30	27												19	94	5	
4:45	34												24	135	6	
5:00	47												33	183	8	
5:15	56												40	220	11	
5:30	63												46	257	13	
5:45	75												53	295	15	
6:00	92												64	336	16	

15-min period Ending Time	OUTPUTS			Apprh PHF	975	Apprh PHF	15 min. totals	60 min totals	15-min Ending					
	L	T	R								72	271	4	
4:15	15	0	0	15	0	0	0	0	0	0	72		4	
4:30	12	0	0	12	0	0	0	0	0	0	73		4	
4:45	7	0	0	7	0	0	0	0	0	0	54		4	
5:00	13	0	0	13	0	0	0	0	0	0	72	271	5	
5:15	9	0	0	9	0	0	0	0	0	0	56	255	5	
5:30	7	0	0	7	0	0	0	0	0	0	52	234	5	
5:45	12	0	0	12	0	0	0	0	0	0	59	239	5	
6:00	17	0	0	17	0	0	0	0	0	0	70	237	6	
<b>Peak Hour</b>	<b>47</b>	<b>0</b>	<b>0</b>		<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>33</b>	<b>183</b>	<b>8</b>	<b>271</b>

PEAK =>  
 HOUR  
 TOTAL

<b>47</b>	<b>0</b>	<b>33</b>	<b>183</b>	<b>8</b>	<b>271</b>									
														<b>Total Intersection Vol</b>

**WHOLE INTERSECTION**

PEAK HR VOL 271  
 PEAK 15 MIN VOL 73  
 PEAK HR FACTOR (PHF) 0.93

**4:00** Peak Period Starting at  
**5:00** Peak Period Ending at

**BY APPROACH**

PEAK HR VOL 47 - - 224  
 PEAK 15 MIN VOL 15 - - 61  
 PEAK HR FACTOR (PHF) **0.78** - - **0.92**

CAUTION : PHF below 0.9

Intersection: **Jones** / **Jefferson**  
 Direction: **N / S** <= Pick => <= Pick => **E / W**  
 Time Period: **12 N - 2:30 PM**

Date: **February 16, 2008** **Saturday**

Project: **E Line SF100368**

**INPUTS**

Labels =>

15-min period

Ending Time

- 12 :15
- 12 :30
- 12 :45
- 1 :00
- 1 :15
- 1 :30
- 1 :45
- 2 :00
- 2 :15
- 2 :30
- 2 :45
- 3 :00

	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	L Tram	
12 :15	14											15	49	2		
12 :30	33											34	131	3		
12 :45	54											53	195	6		
1 :00	70											78	264	8		
1 :15	88											124	355	9		
1 :30	114											162	444	11		
1 :45	129											186	532	14		
2 :00	147											207	611	17		
2 :15	176											234	704	18		
2 :30	203											256	789	21		
2 :45																
3 :00																

15-min period

Ending Time

- 12 :15
- 12 :30
- 12 :45
- 1 :00
- 1 :15
- 1 :30
- 1 :45
- 2 :00
- 2 :15
- 2 :30

**OUTPUTS**

	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF	15 min. totals	60 min totals	15-min period Ending Time
	L	T	R		L	T	R		L	T	R		L	T	L Tram				
12 :15	14	0	0	14	0	0	0	0	0	0	0	15	49	2	66	80	12 :15		
12 :30	19	0	0	19	0	0	0	0	0	0	0	19	82	1	102	121	12 :30		
12 :45	21	0	0	21	0	0	0	0	0	0	0	19	64	3	86	107	12 :45		
1 :00	16	0	0	16	0	0	0	0	0	0	0	25	69	2	96	112	1 :00		
1 :15	18	0	0	18	0	0	0	0	0	0	0	46	91	1	138	156	1 :15		
1 :30	26	0	0	26	0	0	0	0	0	0	0	38	89	2	129	155	1 :30		
1 :45	15	0	0	15	0	0	0	0	0	0	0	24	88	3	115	130	1 :45		
2 :00	18	0	0	18	0	0	0	0	0	0	0	21	79	3	103	121	2 :00		
2 :15	29	0	0	29	0	0	0	0	0	0	0	27	93	1	121	150	2 :15		
2 :30	27	0	0	27	0	0	0	0	0	0	0	22	85	3	110	137	2 :30		
PEAK =>	77	0	0		0	0	0		0	0	0	129	347	9		562			

**Peak Hour**  
**562**  
 Total Intersection Vol

Starting at 12:06 PM

**WHOLE INTERSECTION**

PEAK HR VOL 562  
 PEAK 15 MIN VOL 156  
 PEAK HR FACTOR (PHF) **0.90**

464 Default Comments  
 Change These in The Preferences Window  
 Select File/Preference in the Main Scree  
 Then Click the Comments Tab

File Name : Jones\_Beach\_4\_6pm  
 Site Code : 00000004  
 Start Date : 1/16/2008  
 Page No : 1

**Groups Printed- Unshifted - Bank 1**

Start Time	Jones (SB)					Beach (WB)					Jones (NB)					Beach (EB)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	1	5	9	0	15	1	19	1	2	23	5	8	5	0	18	6	38	5	0	49	105
04:15 PM	2	7	2	0	11	2	20	1	2	25	3	9	5	0	17	6	33	3	0	42	95
04:30 PM	2	6	4	0	12	1	28	2	3	34	8	2	9	0	19	8	22	5	0	35	100
04:45 PM	4	8	3	0	15	1	21	0	1	23	4	8	3	0	15	6	29	7	0	42	95
<b>Total</b>	<b>9</b>	<b>26</b>	<b>18</b>	<b>0</b>	<b>53</b>	<b>5</b>	<b>88</b>	<b>4</b>	<b>8</b>	<b>105</b>	<b>20</b>	<b>27</b>	<b>22</b>	<b>0</b>	<b>69</b>	<b>26</b>	<b>122</b>	<b>20</b>	<b>0</b>	<b>168</b>	<b>395</b>
05:00 PM	2	7	4	0	13	4	20	6	3	33	4	4	3	0	11	5	39	1	0	45	102
05:15 PM	3	7	2	0	12	2	28	1	2	33	5	5	5	0	15	4	37	0	0	41	101
05:30 PM	2	2	3	0	7	1	32	0	2	35	2	4	6	0	12	2	37	4	0	43	97
05:45 PM	2	13	2	0	17	2	26	0	3	31	1	11	4	0	16	3	44	2	0	49	113
<b>Total</b>	<b>9</b>	<b>29</b>	<b>11</b>	<b>0</b>	<b>49</b>	<b>9</b>	<b>106</b>	<b>7</b>	<b>10</b>	<b>132</b>	<b>12</b>	<b>24</b>	<b>18</b>	<b>0</b>	<b>54</b>	<b>14</b>	<b>157</b>	<b>7</b>	<b>0</b>	<b>178</b>	<b>413</b>
<b>Grand Total</b>	<b>18</b>	<b>55</b>	<b>29</b>	<b>0</b>	<b>102</b>	<b>14</b>	<b>194</b>	<b>11</b>	<b>18</b>	<b>237</b>	<b>32</b>	<b>51</b>	<b>40</b>	<b>0</b>	<b>123</b>	<b>40</b>	<b>279</b>	<b>27</b>	<b>0</b>	<b>346</b>	<b>808</b>
Apprch %	17.6	53.9	28.4	0		5.9	81.9	4.6	7.6		26	41.5	32.5	0		11.6	80.6	7.8	0		
Total %	2.2	6.8	3.6	0	12.6	1.7	24	1.4	2.2	29.3	4	6.3	5	0	15.2	5	34.5	3.3	0	42.8	
Unshifted	18	55	29	0	102	14	194	11	18	237	32	51	40	0	123	40	279	27	0	346	808
% Unshifted	100	100	100	0	100	100	100	100	100	100	100	100	100	0	100	100	100	100	0	100	100
Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Start Time	Jones (SB)					Beach (WB)					Jones (NB)					Beach (EB)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1

Peak Hour for Entire Intersection Begins at 05:00 PM

05:00 PM	2	7	4	0		4	20	6	3		5					5	39	1	0	45	102
05:15 PM	3	7	2	0	12	2	28	1	2	33	2	4	6	0	12	2	37	4	0	43	97
<b>05:30 PM</b>	<b>2</b>	<b>2</b>	<b>3</b>	<b>0</b>	<b>7</b>	<b>1</b>	<b>32</b>	<b>0</b>	<b>2</b>	<b>35</b>	<b>2</b>	<b>4</b>	<b>6</b>	<b>0</b>	<b>12</b>	<b>2</b>	<b>37</b>	<b>4</b>	<b>0</b>	<b>43</b>	<b>97</b>
<b>05:45 PM</b>	<b>2</b>	<b>13</b>	<b>2</b>	<b>0</b>	<b>17</b>	<b>2</b>	<b>26</b>	<b>0</b>	<b>3</b>	<b>31</b>	<b>1</b>	<b>11</b>	<b>4</b>	<b>0</b>	<b>16</b>	<b>3</b>	<b>44</b>	<b>2</b>	<b>0</b>	<b>49</b>	<b>113</b>
Total Volume	9	29	11	0	49	9	106	7	10	132	12	24	18	0	54	14	157	7	0	178	413
% App. Total	18.4	59.2	22.4	0		6.8	80.3	5.3	7.6		22.2	44.4	33.3	0		7.9	88.2	3.9	0		
PHF	.750	.558	.688	.000	.721	.563	.828	.292	.833	.943	.600	.545	.750	.000	.844	.700	.892	.438	.000	.908	.914

Default Comments  
 Change These in The Preferences Window  
 Select File/Preference in the Main Scree  
 Then Click the Comments Tab

File Name : Jones\_Beach\_4\_6pm  
 Site Code : 00000004  
 Start Date : 1/16/2008  
 Page No : 2

Start Time	Jones (SB)					Beach (WB)					Jones (NB)					Beach (EB)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Each Approach Begins at:																					
	04:00 PM					05:00 PM					04:00 PM					05:00 PM					
+0 mins.	1	5	9		15	4	20	6	3		3	9	5	0	17	5	39	1	0	45	
+15 mins.	2	7	2	0	11	2	28	1	2	33	3	9	5	0	17	4	37	0	0	41	
+30 mins.	2	6	4	0	12	1	32	0	2	35	8	9	9	0	19	2	37	4			
<b>+45 mins.</b>	<b>4</b>	<b>8</b>	<b>3</b>	<b>0</b>	<b>15</b>	<b>2</b>	<b>26</b>	<b>0</b>	<b>3</b>	<b>31</b>	<b>4</b>	<b>8</b>	<b>3</b>	<b>0</b>	<b>15</b>	<b>3</b>	<b>44</b>	<b>2</b>	<b>0</b>	<b>49</b>	
Total Volume	9	26	18	0	53	9	106	7	10	132	20	27	22	0	69	14	157	7	0	178	
% App. Total	17	49.1	34	0		6.8	80.3	5.3	7.6		29	39.1	31.9	0		7.9	88.2	3.9	0		
PHF	.563	.813	.500	.000	.883	.563	.828	.292	.833	.943	.625	.750	.611	.000	.908	.700	.892	.438	.000	.908	

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*

File Name : Jones\_Beach\_12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 1

466 Default Comments  
Change These in The Preferences Window  
Select File/Preference in the Main Scree  
Then Click the Comments Tab

Groups Printed- Unshifted - Bank 1

Start Time	Beach (southbound)					Jones (westbound)					Beach (northbound)					Jones (eastbound)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
12:00 PM	6	2	8	0	16	2	39	6	0	47	10	18	14	0	42	8	59	4	0	71	176
12:15 PM	3	13	10	0	26	5	30	0	0	35	12	9	22	0	43	10	70	8	0	88	192
12:30 PM	3	11	7	0	21	2	35	3	0	40	8	11	12	0	31	9	50	9	0	68	160
12:45 PM	7	6	8	0	21	0	29	4	0	33	11	7	22	0	40	12	51	5	0	68	162
Total	19	32	33	0	84	9	133	13	0	155	41	45	70	0	156	39	230	26	0	295	690
01:00 PM	20	11	11	0	42	7	46	5	0	58	8	13	22	0	43	18	69	8	1	96	239
01:15 PM	10	14	14	0	38	4	37	4	0	45	11	20	14	0	45	18	50	7	0	75	203
01:30 PM	6	21	14	0	41	3	51	7	0	61	9	8	30	0	47	10	68	7	0	85	234
01:45 PM	7	9	10	0	26	3	51	11	0	65	8	8	22	0	38	16	83	9	0	108	237
Total	43	55	49	0	147	17	185	27	0	229	36	49	88	0	173	62	270	31	1	364	913
02:00 PM	9	11	14	0	34	5	54	9	0	68	13	10	17	0	40	12	73	10	0	95	237
Grand Total	71	98	96	0	265	31	372	49	0	452	90	104	175	0	369	113	573	67	1	754	1840
Apprch %	26.8	37	36.2	0		6.9	82.3	10.8	0		24.4	28.2	47.4	0		15	76	8.9	0.1		
Total %	3.9	5.3	5.2	0	14.4	1.7	20.2	2.7	0	24.6	4.9	5.7	9.5	0	20.1	6.1	31.1	3.6	0.1	41	
Unshifted	71	98	96	0	265	31	372	49	0	452	90	104	175	0	369	113	573	67	1	754	1840
% Unshifted	100	100	100	0	100	100	100	100	0	100	100	100	100	0	100	100	100	100	100	100	100
Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*

Default Comments

Change These in The Preferences Window

Select File/Preference in the Main Scree


Then Click the Comments Tab

File Name : Jones\_Beach\_12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 2

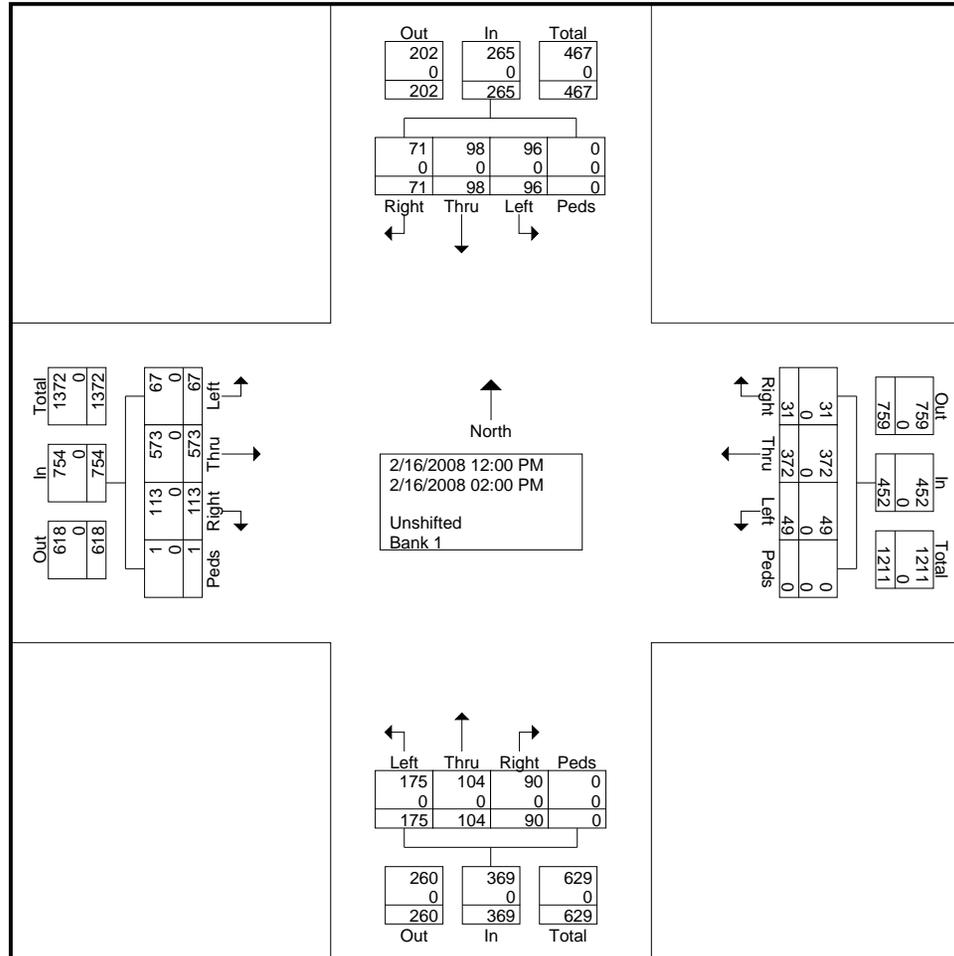

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*

File Name : Jones\_Beach\_12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 3

468 Default Comments  
Change These in The Preferences Window  
Select File/Preference in the Main Scree  
Then Click the Comments Tab

Start Time	Beach (southbound)					Jones (westbound)					Beach (northbound)					Jones (eastbound)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 12:00 PM to 02:00 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 01:00 PM																					
01:00 PM	<b>20</b>	11	11	0	<b>42</b>	<b>7</b>	46	5	0	58	8	13	22	0	43	<b>18</b>	69	8	<b>1</b>	96	<b>239</b>
01:15 PM	10	14	<b>14</b>								<b>11</b>	<b>20</b>	14	0	45	18	50	7	0	75	203
01:30 PM	6	<b>21</b>					<b>51</b>	7	0	61	9	8	<b>30</b>	0	<b>47</b>	10	68	7	0	85	234
01:45 PM	7	9	10	0	26	3	51	<b>11</b>	0	<b>65</b>	8	8	22	0	38	16	<b>83</b>	<b>9</b>		<b>108</b>	237
Total Volume	43	55	49	0	147	17	185	27	0	229	36	49	88	0	173	62	270	31	1	364	913
% App. Total	29.3	37.4	33.3	0		7.4	80.8	11.8	0		20.8	28.3	50.9	0		17	74.2	8.5	0.3		
PHF	.538	.655	.875	.000	.875	.607	.907	.614	.000	.881	.818	.613	.733	.000	.920	.861	.813	.861	.250	.843	.955

Intersection: **Hyde**  
 Direction: N / S <= Pick => E / W  
 Time Period: **4 P-6 P**

**Beach**  
 N / S <= Pick => E / W

Date: **January 16, 2008** **Wednesday**

Project: 100368 E Line SF

**INPUTS**

Labels =>

15-min period Ending Time	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	Cable in	T	R		L	T	R		L	T	Cable out		L	T	R	
4:15	6		4		20	9	20		6	30	4		30	4		
4:30	8		11		30	34	41		12	56	6		52	5		
4:45	11		20		46	51	54		13	67	8		66	9		
5:00	12		26		69	74	76		20	90	9		94	12		
5:15	15		35		86	90	98		23	116	11		141	20		
5:30	18		56		106	102	111		30	158	12		171	24		
5:45	20		67		115	118	124		33	183	14		199	28		
6:00	23		78		132	133	148		34	211	15		223	29		

15-min period Ending Time	OUTPUTS			Apprh PHF	Apprh PHF	Apprh PHF	Apprh PHF	Apprh PHF	Apprh PHF	975	Apprh PHF	15 min. totals	60 min totals	15-min Ending												
	6	0	4									10	20	9	20	49	6	30	4	40	0	30	4	34	133	482
4:15	6	0	4	10	20	9	20	49	6	30	4	40	0	30	4	34	133		4							
4:30	2	0	7	9	10	25	21	56	6	26	2	34	0	22	1	23	122		4							
4:45	3	0	9	12	16	17	13	46	1	11	2	14	0	14	4	18	90		4							
5:00	1	0	6	7	23	23	22	68	7	23	1	31	0	28	3	31	137	482	5							
5:15	3	0	9	12	17	16	22	55	3	26	2	31	0	47	8	55	153	502	5							
5:30	3	0	21	24	20	12	13	45	7	42	1	50	0	30	4	34	153	533	5							
5:45	2	0	11	13	9	16	13	38	3	25	2	30	0	28	4	32	113	556	5							
6:00	3	0	11	14	17	15	24	56	1	28	1	30	0	24	1	25	125	544	6							
												9	0	47	69	67	70	20	116	6	0	133	19	556	556	556

PEAK =>  
 HOUR  
 TOTAL

9	0	47	69	67	70	20	116	6	0	133	19
---	---	----	----	----	----	----	-----	---	---	-----	----

Total Intersection Vol  
 556

5 :45

**WHOLE INTERSECTION**

PEAK HR VOL 556  
 PEAK 15 MIN VOL 153  
 PEAK HR FACTOR (PHF) 0.91

**4 :45**  
 Peak Period Starting at

**5 :45**  
 Peak Period Ending at

**BY APPROACH**

PEAK HR VOL 56  
 PEAK 15 MIN VOL 24  
 PEAK HR FACTOR (PHF) **0.58**  
 CAUTION : PHF below 0.9

206  
 68  
**0.76**  
 CAUTION : PHF below 0.9

142  
 50  
**0.71**  
 CAUTION : PHF below 0.9

152  
 55  
**0.69**  
 CAUTION : PHF below 0.9

Intersection: **Hyde** / **Beach**  
 Direction: **N / S** <= Pick => <= Pick => **E / W**  
 Time Period: **12 N - 2:30 PM**

Date: **February 16, 2008** **Saturday**

Project: **E Line SF100368**

**INPUTS**

Labels =>

15-min period

Ending Time

12:15
12:30
12:45
1:00
1:15
1:30
1:45
2:00
2:15
2:30
2:45
3:00

15-min period Ending Time	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	Cable Car	R		L	T	R		L	T	R		L	T	**	
12:15	1	0	24		34	28	31		39	8		13	49	2		
12:30	3	3	44		80	47	65		95	17		31	81	3		
12:45	4	4	66		109	68	89		135	19		40	111	5		
1:00	6	6	98		158	92	114		187	24		47	152	6		
1:15	8	6	115		209	131	161		258	34		57	195	7		
1:30	9	8	135		250	164	196		315	42		65	236	9		
1:45	9	8	168		292	188	233		364	53		74	276	10		
2:00	13	10	190		345	221	282		428	56		79	333	11		
2:15	13	12	215		398	258	320		492	77		88	387	12		
2:30	14	13	243		456	296	369		553	91		99	427	14		

15-min period

Ending Time

12:15
12:30
12:45
1:00
1:15
1:30
1:45
2:00
2:15
2:30

**OUTPUTS**

15-min period Ending Time	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF	15 min. totals	60 min totals	15-min period Ending Time
	L	Cable Car	R		L	T	R		L	T	R		L	T	**				
12:15	1	0	24	25	34	28	31	93	0	39	8	47	13	49	2	64	229	12:15	
12:30	2	3	20	25	46	19	34	99	0	56	9	65	18	32	1	51	240	12:30	
12:45	1	1	22	24	29	21	24	74	0	40	2	42	9	30	2	41	181	12:45	
1:00	2	2	32	36	49	24	25	98	0	52	5	57	7	41	1	49	240	1:00	
1:15	2	0	17	19	51	39	47	137	0	71	10	81	10	43	1	54	291	1:15	
1:30	1	2	20	23	41	33	35	109	0	57	8	65	8	41	2	51	248	1:30	
1:45	0	0	33	33	42	24	37	103	0	49	11	60	9	40	1	50	246	1:45	
2:00	4	2	22	28	53	33	49	135	0	64	3	67	5	57	1	63	293	2:00	
2:15	0	2	25	27	53	37	38	128	0	64	21	85	9	54	1	64	304	2:15	
2:30	1	1	28	30	58	38	49	145	0	61	14	75	11	40	2	53	303	2:30	
PEAK =>	5	5	108		206	132	173		0	238	49		34	191	5				1146

\*\* Cable cars from the lot to sb Hyde St.

Total Intersection Vol

**WHOLE INTERSECTION**

PEAK HR VOL 1,146  
 PEAK 15 MIN VOL 304  
 PEAK HR FACTOR (PHF) **0.94**



Intersection: **Leavenworth** / **Jefferson**  
 Direction: **N/S <= Pick =>** / **<= Pick => E/W**  
 Time Period: **12 N - 2:30 PM**

Date: **February 16, 2008** **Saturday**

Project: **E Line SF100368**

**INPUTS**

Labels =>

15-min period

Ending Time

- 12:15
- 12:30
- 12:45
- 1:00
- 1:15
- 1:30
- 1:45
- 2:00
- 2:15
- 2:30
- 2:45
- 3:00

	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	R	
12:15	24	4				3	0						28	55	0	
12:30	49	7				6	1						49	115	1	
12:45	81	8				7	1						62	176	1	
1:00	116	12				11	1						73	237	2	
1:15	145	17				15	3						91	323	4	
1:30	181	19				19	5						117	406	8	
1:45	217	21				20	6						133	479	9	
2:00	257	28				27	6						151	563	11	
2:15	298	33				33	9						167	644	13	
2:30	338	34				39	10						196	750	14	

15-min period

Ending Time

- 12:15
- 12:30
- 12:45
- 1:00
- 1:15
- 1:30
- 1:45
- 2:00
- 2:15
- 2:30

**OUTPUTS**

	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	R	
12:15	24	4	0	28	0	3	0	3	0	0	0	0	28	55	0	83
12:30	25	3	0	28	0	3	1	4	0	0	0	0	21	60	1	82
12:45	32	1	0	33	0	1	0	1	0	0	0	0	13	61	0	74
1:00	35	4	0	39	0	4	0	4	0	0	0	0	11	61	1	73
1:15	29	5	0	34	0	4	2	6	0	0	0	0	18	86	2	106
1:30	36	2	0	38	0	4	2	6	0	0	0	0	26	83	4	113
1:45	36	2	0	38	0	1	1	2	0	0	0	0	16	73	1	90
2:00	40	7	0	47	0	7	0	7	0	0	0	0	18	84	2	104
2:15	41	5	0	46	0	6	3	9	0	0	0	0	16	81	2	99
2:30	40	1	0	41	0	6	1	7	0	0	0	0	29	106	1	136

15 min. totals

60 min totals

15-min period

Ending Time

- 12:15
- 12:30
- 12:45
- 1:00
- 1:15
- 1:30
- 1:45
- 2:00
- 2:15
- 2:30

PEAK =>  
 HOUR  
 TOTAL

157	15	0
-----	----	---

0	20	5
---	----	---

0	0	0
---	---	---

79	344	6
----	-----	---

Peak Hour  
**626**  
 Total Intersection Vol

**WHOLE INTERSECTION**

PEAK HR VOL 626  
 PEAK 15 MIN VOL 184  
 PEAK HR FACTOR (PHF) **0.85**

Default Comments  
 Change These in The Preferences Window  
 Select File/Preference in the Main Scree  
 Then Click the Comments Tab


File Name : Leavenworth\_Beach 4\_6pm  
 Site Code : 00000004  
 Start Date : 1/16/2008  
 Page No : 1

**Groups Printed- Unshifted - Bank 1**

Start Time	Leavenworth (SB)					Beach (WB)					Leavenworth (NB)					Beach (EB)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	1	14	6	0	21	1	17	7	0	25	4	3	3	0	10	1	34	6	0	41	97
04:15 PM	3	12	8	0	23	1	19	11	0	31	6	3	2	0	11	0	22	6	0	28	93
04:30 PM	3	4	7	0	14	2	28	12	0	42	8	9	2	0	19	2	20	13	0	35	110
04:45 PM	1	11	11	0	23	1	24	3	0	28	1	4	0	0	5	2	31	14	0	47	103
Total	8	41	32	0	81	5	88	33	0	126	19	19	7	0	45	5	107	39	0	151	403
05:00 PM	1	14	5	0	20	3	19	9	0	31	3	4	3	0	10	2	34	9	0	45	106
05:15 PM	2	10	10	0	22	2	30	7	0	39	4	10	1	0	15	2	23	13	0	38	114
05:30 PM	0	5	8	0	13	3	29	12	0	44	5	1	0	0	6	2	29	9	0	40	103
05:45 PM	0	7	7	0	14	4	17	14	0	35	7	6	4	0	17	1	30	10	0	41	107
Total	3	36	30	0	69	12	95	42	0	149	19	21	8	0	48	7	116	41	0	164	430
Grand Total	11	77	62	0	150	17	183	75	0	275	38	40	15	0	93	12	223	80	0	315	833
Apprch %	7.3	51.3	41.3	0		6.2	66.5	27.3	0		40.9	43	16.1	0		3.8	70.8	25.4	0		
Total %	1.3	9.2	7.4	0	18	2	22	9	0	33	4.6	4.8	1.8	0	11.2	1.4	26.8	9.6	0	37.8	
Unshifted	11	77	62	0	150	17	183	75	0	275	38	40	15	0	93	12	223	80	0	315	833
% Unshifted	100	100	100	0	100	100	100	100	0	100	100	100	100	0	100	100	100	100	0	100	100
Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

474  
 Default Comments  
 Change These in The Preferences Window  
 Select File/Preference in the Main Scree  
 Then Click the Comments Tab

File Name : Leavenworth\_Beach 4\_6pm  
 Site Code : 00000004  
 Start Date : 1/16/2008  
 Page No : 2

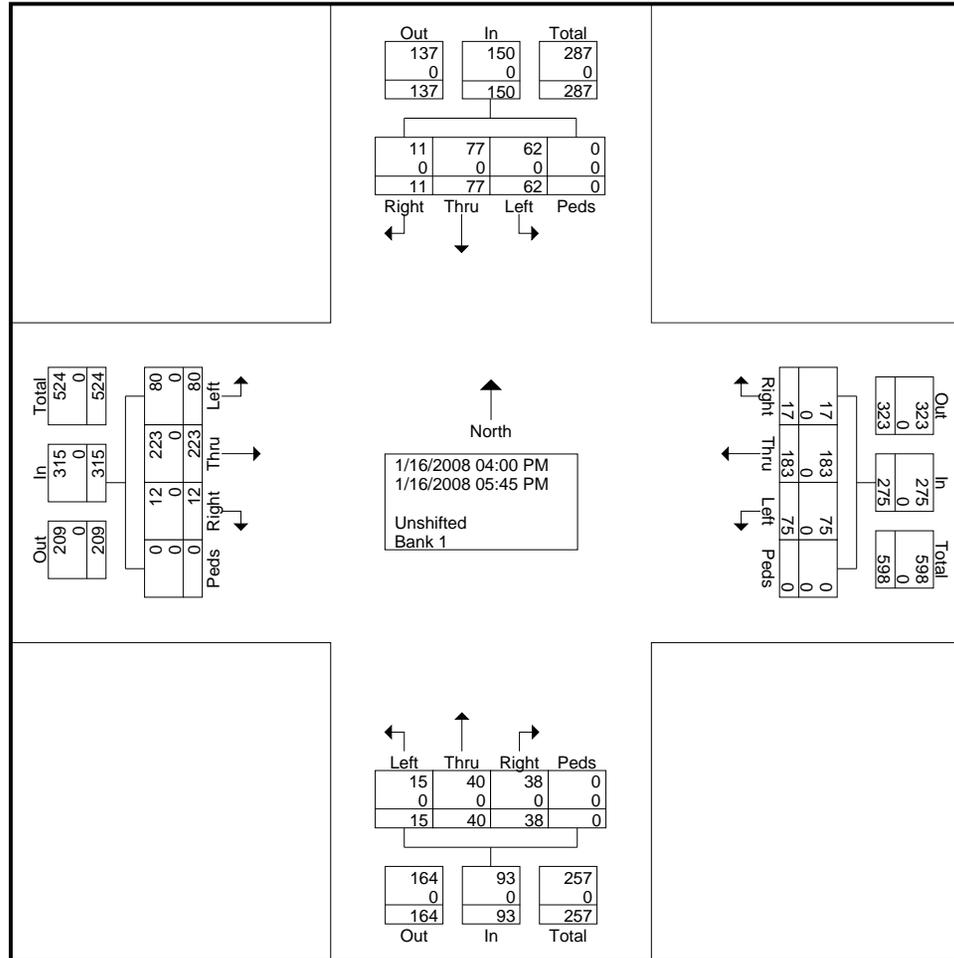

Default Comments  
 Change These in The Preferences Window  
 Select File/Preference in the Main Scree  
 Then Click the Comments Tab

File Name : Leavenworth\_Beach 4\_6pm  
 Site Code : 00000004  
 Start Date : 1/16/2008  
 Page No : 3

Start Time	Leavenworth (SB)					Beach (WB)					Leavenworth (NB)					Beach (EB)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 04:30 PM																					
04:30 PM	3	4	7	0	14	2	28	12	0	42	8				19	2	20	13	0	35	110
04:45 PM	1	11	11		23	1	24	3	0	28	1	4	0	0	5	2	31	14		47	103
05:00 PM	1	14				3	19	9	0	31	3	4	3	0	10	2	34				
<b>05:15 PM</b>	<b>2</b>	<b>10</b>	<b>10</b>	<b>0</b>	<b>22</b>	<b>2</b>	<b>30</b>	7	0	39	4	<b>10</b>	1	0	15	2	23	13	0	38	<b>114</b>
Total Volume	7	39	33	0	79	8	101	31	0	140	16	27	6	0	49	8	108	49	0	165	433
% App. Total	8.9	49.4	41.8	0		5.7	72.1	22.1	0		32.7	55.1	12.2	0		4.8	65.5	29.7	0		
PHF	.583	.696	.750	.000	.859	.667	.842	.646	.000	.833	.500	.675	.500	.000	.645	1.000	.794	.875	.000	.878	.950

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1

Peak Hour for Each Approach Begins at:

	04:00 PM					05:00 PM					04:30 PM					04:45 PM				
+0 mins.	1	14									8				19	2	31	14		47
+15 mins.	3	12	8	0	23	2	30	7	0	39	1	4	0	0	5	2	34			
<b>+30 mins.</b>	<b>3</b>	<b>4</b>	<b>7</b>	<b>0</b>	<b>14</b>	<b>3</b>	<b>29</b>	<b>12</b>	<b>0</b>	<b>44</b>	3	4	3	0	10	2	23	13	0	38
+45 mins.	1	11	11			4	17	14	0	35	4	10	1	0	15	2	29	9	0	40
Total Volume	8	41	32	0	81	12	95	42	0	149	16	27	6	0	49	8	117	45	0	170
% App. Total	9.9	50.6	39.5	0		8.1	63.8	28.2	0		32.7	55.1	12.2	0		4.7	68.8	26.5	0	
PHF	.667	.732	.727	.000	.880	.750	.792	.750	.000	.847	.500	.675	.500	.000	.645	1.000	.860	.804	.000	.904

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*

File Name : Leavenworth\_Beach 12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 1

476 Default Comments  
Change These in The Preferences Window  
Select File/Preference in the Main Scree  
Then Click the Comments Tab

Groups Printed- Unshifted - Bank 1

Start Time	Leavenworth (southbound)					Beach (westbound)					Leavenworth (northbound)					Beach (eastbound)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
12:00 PM	7	10	21	0	38	4	33	16	0	53	14	9	2	0	25	5	53	17	0	75	191
12:15 PM	2	6	18	0	26	5	31	6	0	42	12	11	3	0	26	3	63	9	0	75	169
12:30 PM	3	6	10	0	19	6	31	8	0	45	9	12	5	0	26	3	61	17	0	81	171
12:45 PM	4	6	7	0	17	9	28	6	0	43	9	12	7	0	28	5	75	23	0	103	191
<b>Total</b>	<b>16</b>	<b>28</b>	<b>56</b>	<b>0</b>	<b>100</b>	<b>24</b>	<b>123</b>	<b>36</b>	<b>0</b>	<b>183</b>	<b>44</b>	<b>44</b>	<b>17</b>	<b>0</b>	<b>105</b>	<b>16</b>	<b>252</b>	<b>66</b>	<b>0</b>	<b>334</b>	<b>722</b>
01:00 PM	2	6	13	0	21	7	32	8	0	47	26	10	3	0	39	6	78	22	0	106	213
01:15 PM	4	14	16	0	34	6	32	10	0	48	12	19	8	0	39	4	71	18	0	93	214
01:30 PM	2	3	10	0	15	15	55	13	1	84	16	14	1	0	31	6	66	23	0	95	225
01:45 PM	6	11	12	0	29	13	42	18	0	73	38	18	4	0	60	6	61	24	0	91	253
<b>Total</b>	<b>14</b>	<b>34</b>	<b>51</b>	<b>0</b>	<b>99</b>	<b>41</b>	<b>161</b>	<b>49</b>	<b>1</b>	<b>252</b>	<b>92</b>	<b>61</b>	<b>16</b>	<b>0</b>	<b>169</b>	<b>22</b>	<b>276</b>	<b>87</b>	<b>0</b>	<b>385</b>	<b>905</b>
02:00 PM	1	10	14	0	25	9	51	23	0	83	20	22	5	0	47	10	60	23	0	93	248
02:15 PM	1	13	20	0	34	10	49	17	0	76	21	13	2	0	36	9	73	19	0	101	247
<b>Grand Total</b>	<b>32</b>	<b>85</b>	<b>141</b>	<b>0</b>	<b>258</b>	<b>84</b>	<b>384</b>	<b>125</b>	<b>1</b>	<b>594</b>	<b>177</b>	<b>140</b>	<b>40</b>	<b>0</b>	<b>357</b>	<b>57</b>	<b>661</b>	<b>195</b>	<b>0</b>	<b>913</b>	<b>2122</b>
Apprch %	12.4	32.9	54.7	0		14.1	64.6	21	0.2		49.6	39.2	11.2	0		6.2	72.4	21.4	0		
Total %	1.5	4	6.6	0	12.2	4	18.1	5.9	0	28	8.3	6.6	1.9	0	16.8	2.7	31.1	9.2	0	43	
Unshifted	32	85	141	0	258	84	384	125	1	594	177	140	40	0	357	57	661	195	0	913	2122
% Unshifted	100	100	100	0	100	100	100	100	100	100	100	100	100	0	100	100	100	100	0	100	100
Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*

Default Comments

Change These in The Preferences Window

Select File/Preference in the Main Scree


Then Click the Comments Tab

File Name : Leavenworth\_Beach 12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 2

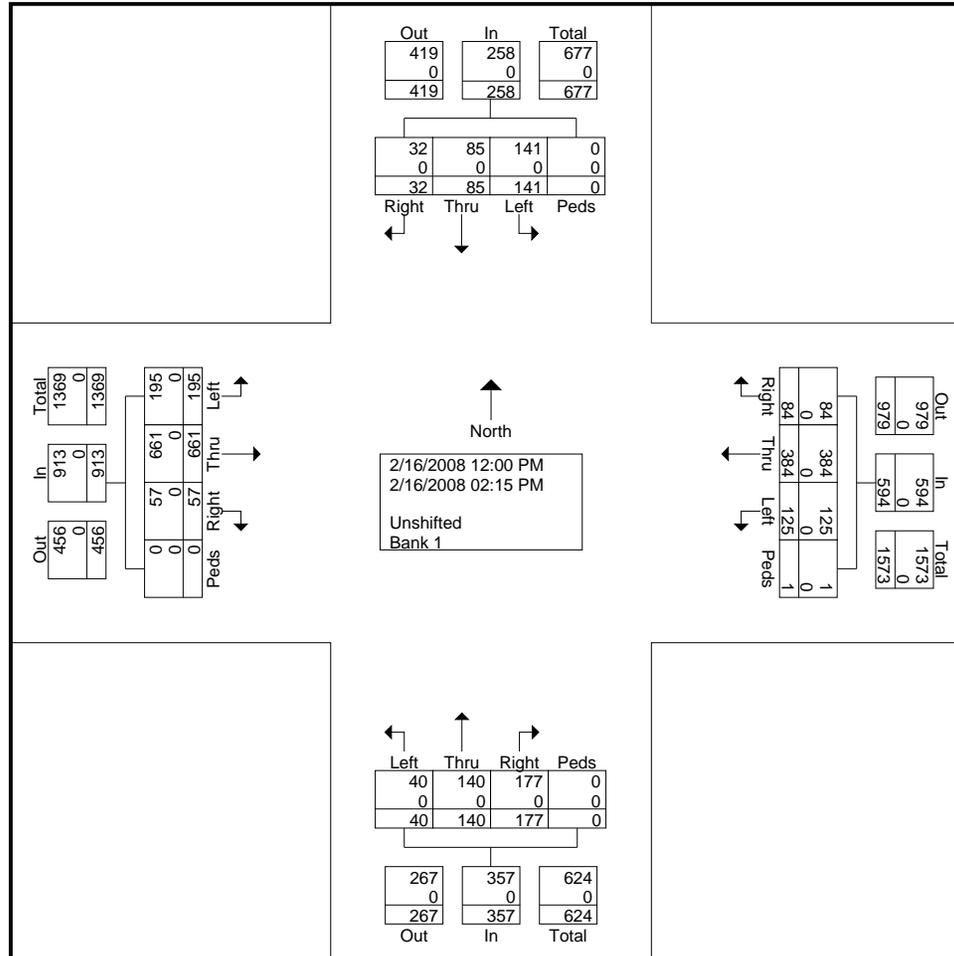

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*

File Name : Leavenworth\_Beach 12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 3

478 Default Comments  
Change These in The Preferences Window  
Select File/Preference in the Main Scree  
Then Click the Comments Tab

Start Time	Leavenworth (southbound)					Beach (westbound)					Leavenworth (northbound)					Beach (eastbound)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 12:00 PM to 02:15 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 01:30 PM																					
01:30 PM	2	3	10	0	15	<b>15</b>	<b>55</b>	13	<b>1</b>	<b>84</b>	16	14	1	0	31	6	66	23	0	95	225
01:45 PM	<b>6</b>	11	12	0	29	13	42	18	0	73	<b>38</b>				<b>60</b>	6	61	<b>24</b>			<b>253</b>
02:00 PM	1	10	14	0	25	9	51	<b>23</b>	0	83	20	<b>22</b>	<b>5</b>	0	47	<b>10</b>	60	23	0	93	248
02:15 PM	1	<b>13</b>	<b>20</b>		<b>34</b>	10	49	17	0	76	21	13	2	0	36	9	<b>73</b>			<b>101</b>	247
Total Volume	10	37	56	0	103	47	197	71	1	316	95	67	12	0	174	31	260	89	0	380	973
% App. Total	9.7	35.9	54.4	0		14.9	62.3	22.5	0.3		54.6	38.5	6.9	0		8.2	68.4	23.4	0		
PHF	.417	.712	.700	.000	.757	.783	.895	.772	.250	.940	.625	.761	.600	.000	.725	.775	.890	.927	.000	.941	.961

Intersection: **Larkin**  
 Direction: **N / S <= Pick > E / W**  
 Time Period: **4 P-6 P**

**Beach**  
 N / S <= Pick > E / W

Date: **January 16, 2008** **Wednesday**

Project: 100368 E Line SF

**INPUTS**

Labels =>

15-min period Ending Time	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	R	
4:15	3		8						16	4			11	30		
4:30	7		21						33	8			20	68		
4:45	9		30						50	13			28	107		
5:00	15		46						69	15			44	130		
5:15	23		61						83	21			58	163		
5:30	26		82						96	27			71	190		
5:45	31		90						119	29			83	221		
6:00	35		99						130	31			90	257		

15-min period Ending Time	OUTPUTS			Apprh PHF				Apprh PHF				Apprh PHF				Apprh PHF	15 min. totals	60 min totals	15-min Ending
	L	T	R		L	T	R		L	T	R		L	T	R				
4:15	3	0	8	11	0	0	0	0	0	16	4	20	11	30	0	41	72		4
4:30	4	0	13	17	0	0	0	0	0	17	4	21	9	38	0	47	85		4
4:45	2	0	9	11	0	0	0	0	0	17	5	22	8	39	0	47	80		4
5:00	6	0	16	22	0	0	0	0	0	19	2	21	16	23	0	39	82	319	5
5:15	8	0	15	23	0	0	0	0	0	14	6	20	14	33	0	47	90	337	5
5:30	3	0	21	24	0	0	0	0	0	13	6	19	13	27	0	40	83	335	5
5:45	5	0	8	13	0	0	0	0	0	23	2	25	12	31	0	43	81	336	5
6:00	4	0	9	13	0	0	0	0	0	11	2	13	7	36	0	43	69	323	6
	20	0	53		0	0	0		0	67	17		47	133	0				Peak Hour

PEAK => **20** **0** **53**      **0** **0** **0**      **0** **67** **17**      **47** **133** **0**      **337**  
 HOUR TOTAL  
 TOTAL 5:15  
 Total Intersection Vol

**WHOLE INTERSECTION**

PEAK HR VOL 337  
 PEAK 15 MIN VOL 90  
 PEAK HR FACTOR (PHF) 0.94  
 Peak Period Starting at **4:15**  
 Peak Period Ending at **5:15**

**BY APPROACH**

PEAK HR VOL 73      -      84      180  
 PEAK 15 MIN VOL 23      -      22      47  
 PEAK HR FACTOR (PHF) **0.79**      -      **0.95**      **0.96**

CAUTION : PHF below 0.9

Intersection: **Larkin** / **Beach**  
 Direction: **N/S <= Pick =>** **<= Pick => E/W**  
 Time Period: **12 N - 2:30 PM**

Date: **February 16, 2008** **Saturday**

Project: **E Line SF100368**

**INPUTS**

Labels =>

15-min period

Ending Time

12:15
12:30
12:45
1:00
1:15
1:30
1:45
2:00
2:15
2:30
2:45
3:00

15-min period Ending Time	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	R	
12:15	10		20						22	3			18	58		
12:30	20		48						47	7			32	106		
12:45	29		65						78	18			54	150		
1:00	44		86						118	32			87	188		
1:15	54		133						155	40			117	249		
1:30	62		163						191	47			150	298		
1:45	74		193						223	68			187	345		
2:00	82		221						250	81			234	405		
2:15	93		265						301	97			260	468		
2:30	115		299						349	106			285	533		

15-min period

Ending Time

12:15
12:30
12:45
1:00
1:15
1:30
1:45
2:00
2:15
2:30

**OUTPUTS**

15-min period Ending Time	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF	15 min. totals	60 min totals	15-min period Ending Time
	L	T	R		L	T	R		L	T	R		L	T	R				
12:15	10	0	20	30	0	0	0	0	0	22	3	25	18	58	0	76	131	12:15	
12:30	10	0	28	38	0	0	0	0	0	25	4	29	14	48	0	62	129	12:30	
12:45	9	0	17	26	0	0	0	0	0	31	11	42	22	44	0	66	134	12:45	
1:00	15	0	21	36	0	0	0	0	0	40	14	54	33	38	0	71	161	1:00	
1:15	10	0	47	57	0	0	0	0	0	37	8	45	30	61	0	91	193	1:15	
1:30	8	0	30	38	0	0	0	0	0	36	7	43	33	49	0	82	163	1:30	
1:45	12	0	30	42	0	0	0	0	0	32	21	53	37	47	0	84	179	1:45	
2:00	8	0	28	36	0	0	0	0	0	27	13	40	47	60	0	107	183	2:00	
2:15	11	0	44	55	0	0	0	0	0	51	16	67	26	63	0	89	211	2:15	
2:30	22	0	34	56	0	0	0	0	0	48	9	57	25	65	0	90	203	2:30	
PEAK =>	53	0	136		0	0	0		0	158	59		135	235	0		776	Peak Hour	
HOUR TOTAL																		776	Total Intersection Vol

**WHOLE INTERSECTION**

PEAK HR VOL 776  
 PEAK 15 MIN VOL 211  
 PEAK HR FACTOR (PHF) **0.92**

Intersection: **Polk**  
 Direction: N / S <= Pick => E / W  
 Time Period: **4 P-6 P**

**Beach**  
 N / S <= Pick => E / W

Date: **January 16, 2008** **Wednesday**

Project: 100368 E Line SF

**INPUTS**

Labels =>

15-min period Ending Time	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	R	
4:15	0		10						7	5			30	4		
4:30	3		23						15	10			62	8		
4:45	8		34						16	16			98	11		
5:00	12		51						20	24			131	14		
5:15	12		65						22	31			174	15		
5:30	13		76						23	35			207	15		
5:45	15		98						26	41			242	15		
6:00	16		109						27	47			280	18		

15-min period Ending Time	OUTPUTS			Apprh PHF				Apprh PHF				Apprh PHF				Apprh PHF	15 min. totals	60 min totals	15-min Ending
	L	T	R		L	T	R		L	T	R		L	T	R				
4:15	0	0	10	10	0	0	0	0	0	7	5	12	30	4	0	34	56		4
4:30	3	0	13	16	0	0	0	0	0	8	5	13	32	4	0	36	65		4
4:45	5	0	11	16	0	0	0	0	0	1	6	7	36	3	0	39	62		4
5:00	4	0	17	21	0	0	0	0	0	4	8	12	33	3	0	36	69	252	5
5:15	0	0	14	14	0	0	0	0	0	2	7	9	43	1	0	44	67	263	5
5:30	1	0	11	12	0	0	0	0	0	1	4	5	33	0	0	33	50	248	5
5:45	2	0	22	24	0	0	0	0	0	3	6	9	35	0	0	35	68	254	5
6:00	1	0	11	12	0	0	0	0	0	1	6	7	38	3	0	41	60	245	6
TOTAL			12	0	55	0	0	0	0	15	26	975	144	11	0	155	Peak Hour		263

PEAK => **12** **0** **55**      **0** **0** **0**      **0** **15** **26**      **144** **11** **0**      **263**  
 HOUR  
 TOTAL  
 5:15  
 Total Intersection Vol

**WHOLE INTERSECTION**  
 PEAK HR VOL 263  
 PEAK 15 MIN VOL 69  
 PEAK HR FACTOR (PHF) 0.95  
 Peak Period Starting at **4:15**  
 Peak Period Ending at **5:15**

**BY APPROACH**  
 PEAK HR VOL 67  
 PEAK 15 MIN VOL 21  
 PEAK HR FACTOR (PHF) **0.80**  
 CAUTION : PHF below 0.9  
 -  
 41  
 13  
**0.79**  
 CAUTION : PHF below 0.9  
 155  
 44  
**0.88**  
 CAUTION : PHF below 0.9

Intersection: **Polk** / **Beach**  
 Direction: **N / S** <= Pick => <= Pick => **E / W**  
 Time Period: **12 N - 2:30 PM**

Date: **February 16, 2008** **Saturday**

Project: **E Line SF100368**

**INPUTS**

Labels =>

15-min period

Ending Time

- 12 :15
- 12 :30
- 12 :45
- 1 :00
- 1 :15
- 1 :30
- 1 :45
- 2 :00
- 2 :15
- 2 :30
- 2 :45
- 3 :00

	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	R	
12 :15	1		35						5	2		59	7			
12 :30	6		62						8	6		105	7			
12 :45	9		91						13	8		156	10			
1 :00	16		160						18	19		183	21			
1 :15	22		197						23	24		240	27			
1 :30	30		244						31	31		294	32			
1 :45	37		287						38	36		340	41			
2 :00	47		335						49	44		394	50			
2 :15	53		392						59	49		442	57			
2 :30	63		447						70	61		521	66			
2 :45																
3 :00																

15-min period

Ending Time

- 12 :15
- 12 :30
- 12 :45
- 1 :00
- 1 :15
- 1 :30
- 1 :45
- 2 :00
- 2 :15
- 2 :30

**OUTPUTS**

	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF	15 min. totals	60 min totals	15-min period Ending Time
	L	T	R		L	T	R		L	T	R		L	T	R				
12 :15	1	0	35	36	0	0	0	0	0	5	2	7	59	7	0	66	109	12 :15	
12 :30	5	0	27	32	0	0	0	0	0	3	4	7	46	0	0	46	85	12 :30	
12 :45	3	0	29	32	0	0	0	0	0	5	2	7	51	3	0	54	93	12 :45	
1 :00	7	0	69	76	0	0	0	0	0	5	11	16	27	11	0	38	130	1 :00	
1 :15	6	0	37	43	0	0	0	0	0	5	5	10	57	6	0	63	116	1 :15	
1 :30	8	0	47	55	0	0	0	0	0	8	7	15	54	5	0	59	129	1 :30	
1 :45	7	0	43	50	0	0	0	0	0	7	5	12	46	9	0	55	117	1 :45	
2 :00	10	0	48	58	0	0	0	0	0	11	8	19	54	9	0	63	140	2 :00	
2 :15	6	0	57	63	0	0	0	0	0	10	5	15	48	7	0	55	133	2 :15	
2 :30	10	0	55	65	0	0	0	0	0	11	12	23	79	9	0	88	176	2 :30	
PEAK =>	33	0	203		0	0	0		0	39	30		227	34	0				

PEAK =>  
 HOUR  
 TOTAL

Peak Hour  
**566**  
 Total Intersection Vol

**WHOLE INTERSECTION**

PEAK HR VOL 566  
 PEAK 15 MIN VOL 176  
 PEAK HR FACTOR (PHF) **0.80**



Intersection: **Columbus** / **Beach**  
 Direction: **N/S <= Pick =>** **<= Pick => E/W**  
 Time Period: **12 N - 2:30 PM**

Date: **February 16, 2008** **Saturday**

Project: **E Line SF100368**

**INPUTS**

Labels =>

15-min period

Ending Time

- 12:15
- 12:30
- 12:45
- 1:00
- 1:15
- 1:30
- 1:45
- 2:00
- 2:15
- 2:30
- 2:45
- 3:00

	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF
	L	T	R		L	T	R		L	T	R		L	T	R	
12:15	5		2					43	12			4	29			
12:30	15		17					128	79			9	62			
12:45	27		32					205	135			15	92			
1:00	41		49					286	151			20	121			
1:15	54		62					360	177			26	153			
1:30	68		75					438	205			32	186			
1:45	81		91					519	241			40	234			
2:00	96		108					604	275			50	273			
2:15	109		122					681	317			61	317			
2:30	121		136					780	364			69	358			

15-min period

Ending Time

- 12:15
- 12:30
- 12:45
- 1:00
- 1:15
- 1:30
- 1:45
- 2:00
- 2:15
- 2:30

**OUTPUTS**

	Northbound			Apprh PHF	Southbound			Apprh PHF	Eastbound			Apprh PHF	Westbound			Apprh PHF	15 min. totals	60 min totals
	L	T	R		L	T	R		L	T	R		L	T	R			
12:15	5	0	2	7	0	0	0	0	43	12	55	4	29	0	33	95		
12:30	10	0	15	25	0	0	0	0	85	67	152	5	33	0	38	215		
12:45	12	0	15	27	0	0	0	0	77	56	133	6	30	0	36	196		
1:00	14	0	17	31	0	0	0	0	81	16	97	5	29	0	34	162	668	
1:15	13	0	13	26	0	0	0	0	74	26	100	6	32	0	38	164	737	
1:30	14	0	13	27	0	0	0	0	78	28	106	6	33	0	39	172	694	
1:45	13	0	16	29	0	0	0	0	81	36	117	8	48	0	56	202	700	
2:00	15	0	17	32	0	0	0	0	85	34	119	10	39	0	49	200	738	
2:15	13	0	14	27	0	0	0	0	77	42	119	11	44	0	55	201	775	
2:30	12	0	14	26	0	0	0	0	99	47	146	8	41	0	49	221	824	
	53	0	61		0	0	0		0	342	159		37	172	0		824	

PEAK =>  
 HOUR  
 TOTAL

**Peak Hour**  
**824**  
 Total Intersection Vol

**WHOLE INTERSECTION**

PEAK HR VOL 824  
 PEAK 15 MIN VOL 221  
 PEAK HR FACTOR (PHF) **0.93**

Intersection:  
Direction  
Time Period:

Thom Embarcadero  
N/S <=> Pick <=> E/W  
4 - 6 PM

Bay St.  
N/S := Pick := E/W

Date:

June 20, 2007 Wednesday

Project: 100919

INPUTS

Labels =>

15-min period Ending Time
4:15
4:30
4:45
5:00
5:15
5:30
5:45
6:00

Labels =>	Northbound			Apprh PHF	A Southbound			Apprh PHF	Eastbound			Apprh PHF	a B Westbound			Apprh PHF
	L	T	U		L	T	R		L	T	R		L	T	R	
	230	155	9		146	2	4		0	123						
4:15	230	155	9	146	2	4	0	123								
4:30	384	279	10	314	6	9	0	243								
4:45	598	433	15	433	7	14	0	372								
5:00	830	580	16	560	11	15	0	507								
5:15	1086	700	16	713	16	22	0	645								
5:30	1355	843	16	834	24	27	0	804								
5:45	1645	985	16	963	28	31	0	946								
6:00	1947	1136	17	1091	34	32	0	1067								

OUTPUTS

15-min period Ending Time
4:15
4:30
4:45
5:00
5:15
5:30
5:45
6:00

15-min period Ending Time	Northbound			Apprh PHF	A Southbound			Apprh PHF	Eastbound			Apprh PHF	a B Westbound			Apprh PHF	15 min. totals	60 min totals	15-min Ending
	L	T	U		L	T	R		L	T	R		L	T	R				
4:15	230	155	9	394	0	146	2	148	4	0	123	127	0	0	0	0	669		4
4:30	154	124	1	279	0	168	4	172	5	0	120	125	0	0	0	0	576		4
4:45	214	154	5	373	0	119	1	120	5	0	129	134	0	0	0	0	627		4
5:00	232	147	1	380	0	127	4	131	1	0	135	136	0	0	0	0	647	2519	5
5:15	256	120	0	376	0	153	5	158	7	0	138	145	0	0	0	0	679	2529	5
5:30	269	143	0	412	0	121	8	129	5	0	159	164	0	0	0	0	705	2658	5
5:45	290	142	0	432	0	129	4	133	4	0	142	146	0	0	0	0	711	2742	5
6:00	302	151	1	454	0	128	6	134	1	0	121	122	0	0	0	0	710	2805	6
TOTAL	1117	556	1		0	531	23		17	0	560		0	0	0				2805

PEAK =>  
HOUR  
TOTAL

1117 556 1

0 531 23

6:00

17 0 560

0 0 0

2805  
Total Intersection Vol

WHOLE INTERSECTION

PEAK HR VOL 2,805  
PEAK 15 MIN VOL 711  
PEAK HR FACTOR (PHF) 0.99

5:00  
Peak Period Starting at


6:00  
Peak Period Ending at

BY APPROACH

PEAK HR VOL 1,674  
PEAK 15 MIN VOL 454  
PEAK HR FACTOR (PHF) 0.92

554  
158  
0.88  
CAUTION : PHF below 0.9

577  
164  
0.88  
CAUTION : PHF below 0.9

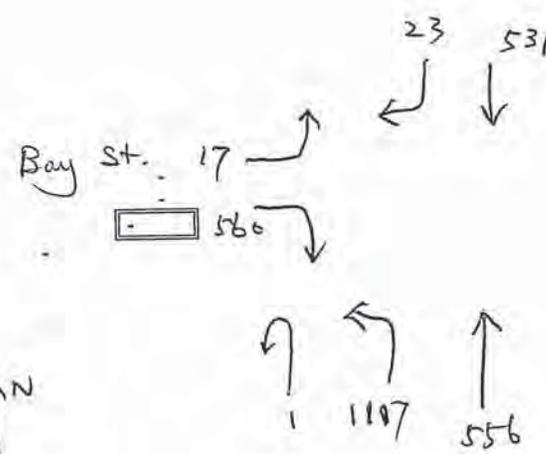

The Embarcadero

Intersection: Embarcadero  
 Direction: N/S <= Pick => E/W  
 Time Period: 12N-2P

Bay  
N/S := Pick = E/W

Date: June 23, 2007 Saturday

Project: 100919

**INPUTS**

Labels =>

15-min period Ending Time

12:15
12:30
12:45
1:00
1:15
1:30
1:45
2:00

Northbound			Apprh PHF	A Southbound			Apprh PHF	Eastbound			Apprh PHF	a B Westbound			Apprh PHF
L	T	U		L	T	R		L	T	R		L	T	R	
108	219	3		107	4			8		201					
232	483	4		192	8			15		355					
328	662	5		284	11			23		496					
451	894	5		394	17			27		629					
554	1068	6		485	24			32		733					
680	1307	8		593	35			34		854					
799	1528	12		706	45			37		971					
908	1728	12		817	53			43		1083					

**OUTPUTS**

15-min period Ending Time

12:15
12:30
12:45
1:00
1:15
1:30
1:45
2:00

			Apprh PHF				Apprh PHF				Apprh PHF				Apprh PHF	15 min. totals	60 min totals	15-min Ending
108	219	3	330	0	107	4	111	8	0	201	209	0	0	0	0	650		12
124	264	1	389	0	85	4	89	7	0	154	161	0	0	0	0	639		12
96	179	1	276	0	92	3	95	8	0	141	149	0	0	0	0	520		12
123	232	0	355	0	110	6	116	4	0	133	137	0	0	0	0	608	2417	1
103	174	1	278	0	91	7	98	5	0	104	109	0	0	0	0	485	2252	1
126	239	2	367	0	108	11	119	2	0	121	123	0	0	0	0	609	2222	1
119	221	4	344	0	113	10	123	3	0	117	120	0	0	0	0	587	2289	1
109	200	0	309	0	111	8	119	6	0	112	118	0	0	0	0	546	2227	2
451	894	5		0	394	17		27	0	629		0	0	0				Peak Hour

PEAK => HOUR TOTAL

451	894	5	0	394	17	27	0	629	0	0	0
-----	-----	---	---	-----	----	----	---	-----	---	---	---

2417 Total Intersection Vol

1:00

**WHOLE INTERSECTION**

PEAK HR VOL 2,417  
 PEAK 15 MIN VOL 650  
 PEAK HR FACTOR (PHF) 0.93

12:00  
 Peak Period Starting at


1:00  
 Peak Period Ending at

**BY APPROACH**

PEAK HR VOL 1,350  
 PEAK 15 MIN VOL 389  
 PEAK HR FACTOR (PHF) 0.87  
 CAUTION : PHF below 0.9

411  
 116  
0.89  
 CAUTION : PHF below 0.9

656  
 209  
0.78  
 CAUTION : PHF below 0.9

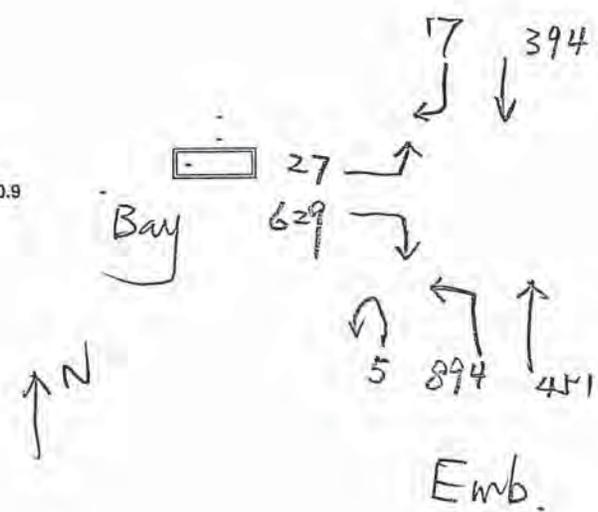

Default Comments  
 Change These in The Preferences Window  
 Select File/Preference in the Main Scree  
 Then Click the Comments Tab

File Name : The Embarcadero\_Bay\_4\_6pm  
 Site Code : 00000004  
 Start Date : 1/16/2008  
 Page No : 1

**Groups Printed- Unshifted - Bank 1**

Start Time	The Embarcadero (SB)					Bay St (WB)					The Embarcadero (NB)					Bay St (EB)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
04:00 PM	5	127	0	2	134	0	0	0	0	0	0	108	164	1	273	129	0	2	0	131	538
04:15 PM	1	122	0	2	125	0	0	0	0	0	0	114	242	3	359	139	0	4	0	143	627
04:30 PM	3	99	0	1	103	0	0	0	0	0	0	94	203	2	299	103	0	3	0	106	508
04:45 PM	2	131	0	1	134	0	0	0	0	0	0	109	221	1	331	133	0	6	0	139	604
<b>Total</b>	<b>11</b>	<b>479</b>	<b>0</b>	<b>6</b>	<b>496</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>425</b>	<b>830</b>	<b>7</b>	<b>1262</b>	<b>504</b>	<b>0</b>	<b>15</b>	<b>0</b>	<b>519</b>	<b>2277</b>
05:00 PM	0	124	0	1	125	0	0	0	0	0	0	109	296	3	408	162	0	0	0	162	695
05:15 PM	0	111	0	3	114	0	0	0	0	0	0	108	357	2	467	187	0	1	0	188	769
05:30 PM	1	153	0	2	156	0	0	0	0	0	0	132	385	3	520	208	0	1	0	209	885
05:45 PM	1	153	0	4	158	0	0	0	0	0	0	126	473	2	601	204	0	0	0	204	963
<b>Total</b>	<b>2</b>	<b>541</b>	<b>0</b>	<b>10</b>	<b>553</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>475</b>	<b>1511</b>	<b>10</b>	<b>1996</b>	<b>761</b>	<b>0</b>	<b>2</b>	<b>0</b>	<b>763</b>	<b>3312</b>
<b>Grand Total</b>	<b>13</b>	<b>1020</b>	<b>0</b>	<b>16</b>	<b>1049</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>900</b>	<b>2341</b>	<b>17</b>	<b>3258</b>	<b>1265</b>	<b>0</b>	<b>17</b>	<b>0</b>	<b>1282</b>	<b>5589</b>
Apprch %	1.2	97.2	0	1.5		0	0	0	0		0	27.6	71.9	0.5		98.7	0	1.3	0		
Total %	0.2	18.3	0	0.3	18.8	0	0	0	0	0	0	16.1	41.9	0.3	58.3	22.6	0	0.3	0	22.9	
Unshifted	13	1020	0	16	1049	0	0	0	0	0	0	900	2341	17	3258	1265	0	17	0	1282	5589
% Unshifted	100	100	0	100	100	0	0	0	0	0	0	100	100	100	100	100	0	100	0	100	100
Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Start Time	The Embarcadero (SB)					Bay St (WB)					The Embarcadero (NB)					Bay St (EB)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1

Peak Hour for Entire Intersection Begins at 05:00 PM

05:00 PM	0	124	0	1	125	0	0	0	0	0	0	109	296	3	408	162	0	0	0	162	695
05:15 PM	0	111	0	3	114	0	0	0	0	0	0	108	357	2	467	187	0	1	0	188	769
<b>05:30 PM</b>	<b>1</b>	<b>153</b>	<b>0</b>	<b>2</b>	<b>156</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>132</b>	<b>385</b>	<b>3</b>	<b>520</b>	<b>208</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>209</b>	<b>885</b>
05:45 PM	1	153	0	4	158	0	0	0	0	0	0	126	473	2	601	204	0	0	0	204	963
Total Volume	2	541	0	10	553	0	0	0	0	0	0	475	1511	10	1996	761	0	2	0	763	3312
% App. Total	0.4	97.8	0	1.8		0	0	0	0		0	23.8	75.7	0.5		99.7	0	0.3	0		
PHF	.500	.884	.000	.625	.875	.000	.000	.000	.000	.000	.000	.900	.799	.833	.830	.915	.000	.500	.000	.913	.860

488  
 Default Comments  
 Change These in The Preferences Window  
 Select File/Preference in the Main Scree  
 Then Click the Comments Tab

File Name : The Embarcadero\_Bay\_4\_6pm  
 Site Code : 00000004  
 Start Date : 1/16/2008  
 Page No : 2

Start Time	The Embarcadero (SB)					Bay St (WB)					The Embarcadero (NB)					Bay St (EB)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	

Peak Hour Analysis From 04:00 PM to 05:45 PM - Peak 1 of 1

Peak Hour for Each Approach Begins at:

	05:00 PM					04:00 PM					05:00 PM					05:00 PM				
+0 mins.	0	124	0	1	125	0	0	0	0	0	0	109	296	3	408	162	0	0	0	162
+15 mins.	0	111	0	3	114	0	0	0	0	0	0	108	357	2	467	187	0	1		
<b>+30 mins.</b>	<b>1</b>	<b>153</b>	<b>0</b>	<b>2</b>	<b>156</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>132</b>	<b>385</b>	<b>3</b>	<b>520</b>	<b>208</b>	<b>0</b>	<b>1</b>	<b>0</b>	<b>209</b>
+45 mins.	1	153	0	4	158	0	0	0	0	0	0	126	473	2	601	204	0	0	0	204
Total Volume	2	541	0	10	553	0	0	0	0	0	0	475	1511	10	1996	761	0	2	0	763
% App. Total	0.4	97.8	0	1.8		0	0	0	0		0	23.8	75.7	0.5		99.7	0	0.3	0	
PHF	.500	.884	.000	.625	.875	.000	.000	.000	.000	.000	.000	.900	.799	.833	.830	.915	.000	.500	.000	.913

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*

Default Comments

Change These in The Preferences Window

Select File/Preference in the Main Scree

Then Click the Comments Tab

File Name : The Embarcadero\_Bay\_12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 1

## Groups Printed- Unshifted - Bank 1

Start Time	Embarcadero (southbound)					Bay (westbound)					Embarcadero (northbound)					Bay (eastbound)					Int. Total	
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total		
12:15 PM	10	136	0	0	146	0	0	0	0	0	0	262	120	1	383	137	0	7	1	145	674	
12:30 PM	18	102	0	3	123	0	0	0	0	0	0	243	114	5	362	121	0	2	0	123	608	
12:45 PM	11	79	0	4	94	0	0	0	0	0	0	246	113	1	360	137	0	5	0	142	596	
Total	39	317	0	7	363	0	0	0	0	0	0	751	347	7	1105	395	0	14	1	410	1878	
01:00 PM	13	92	0	2	107	0	0	0	0	0	0	244	127	3	374	122	0	14	2	138	619	
01:15 PM	13	113	0	2	128	0	0	0	0	0	0	216	145	2	363	152	0	7	0	159	650	
01:30 PM	14	106	0	2	122	0	0	0	0	0	1	248	139	4	392	90	0	10	0	100	614	
01:45 PM	12	124	0	2	138	0	0	0	0	0	0	197	159	1	357	121	0	4	0	125	620	
Total	52	435	0	8	495	0	0	0	0	0	1	905	570	10	1486	485	0	35	2	522	2503	
02:00 PM	12	122	0	1	135	0	0	0	0	0	0	251	139	3	393	98	0	6	0	104	632	
02:15 PM	20	135	0	2	157	0	0	0	0	0	0	196	131	1	328	130	0	15	0	145	630	
Grand Total	123	1009	0	18	1150	0	0	0	0	0	1	2103	1187	21	3312	1108	0	70	3	1181	5643	
Apprch %	10.7	87.7	0	1.6		0	0	0	0	0	0	63.5	35.8	0.6		93.8	0	5.9	0.3			
Total %	2.2	17.9	0	0.3	20.4	0	0	0	0	0	0	37.3	21	0.4	58.7	19.6	0	1.2	0.1	20.9		
Unshifted	123	1009	0	18	1150	0	0	0	0	0	1	2103	1187	21	3312	1108	0	70	3	1181	5643	
% Unshifted	100	100	0	100	100	0	0	0	0	0	100	100	100	100	100	100	0	100	100	100	100	
Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
% Bank 1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*


File Name : The Embarcadero\_Bay\_12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 2

1490  
Default Comments  
Change These in The Preferences Window  
Select File/Preference in the Main Scree  
Then Click the Comments Tab

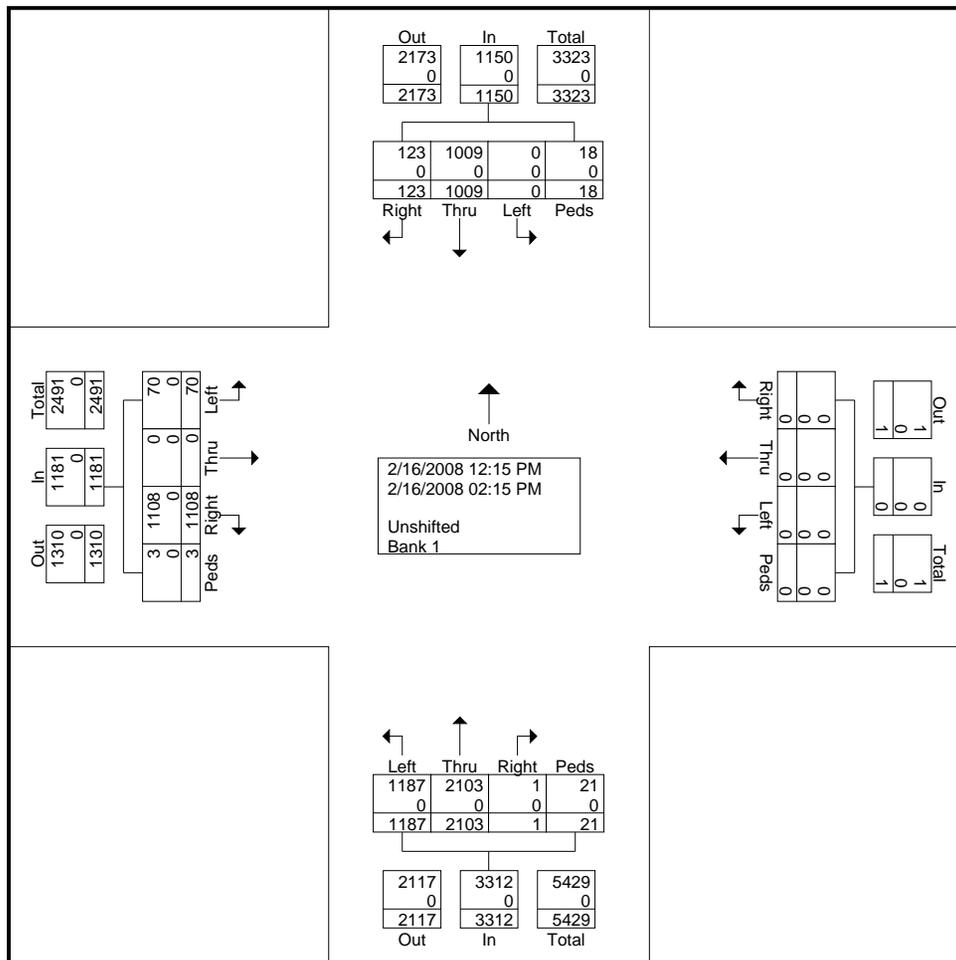

# Wilbur Smith Associates

201 Mission St. Suite 1450  
San Francisco, CA 94105

*Your Tagline Here*

Default Comments

Change These in The Preferences Window

Select File/Preference in the Main Scree

Then Click the Comments Tab

File Name : The Embarcadero\_Bay\_12pm\_230pm

Site Code : 00000001

Start Date : 2/16/2008

Page No : 3

Start Time	Embarcadero (southbound)					Bay (westbound)					Embarcadero (northbound)					Bay (eastbound)					Int. Total
	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	Right	Thru	Left	Peds	App. Total	
Peak Hour Analysis From 12:15 PM to 02:15 PM - Peak 1 of 1																					
Peak Hour for Entire Intersection Begins at 01:15 PM																					
01:15 PM	13	113	0	2	128	0	0	0	0	0	0	216	145	2	363	152	0	7	0	159	650
01:30 PM	14	106	0	2	122	0	0	0	0	0	1	912	582	10	1505	90	0	10	0	488	2516
<b>01:45 PM</b>	<b>12</b>	<b>124</b>	<b>0</b>	<b>2</b>	<b>138</b>	0	0	0	0	0	0	197	<b>159</b>	1	357	121	0	4	0	125	620
02:00 PM	12	122	0	1	135	0	0	0	0	0	0	<b>251</b>	139	3	<b>393</b>	98	0	6	0	104	632
Total Volume	51	465	0	7	523	0	0	0	0	0	1	912	582	10	1505	461	0	27	0	488	2516
% App. Total	9.8	88.9	0	1.3		0	0	0	0	0	0.1	60.6	38.7	0.7		94.5	0	5.5	0		
PHF	.911	.938	.000	.875	.947	.000	.000	.000	.000	.000	.250	.908	.915	.625	.957	.758	.000	.675	.000	.767	.968

## TRANSPORTATION-CIRCULATION

### Level of Service Calculation Sheets

#### A. Existing Weekday Conditions (Table 3.4-2)


1. Jefferson Street and Jones Street
2. Beach Street and Jones Street
3. Beach Street and Hyde Street
4. Jefferson Street and Leavenworth Street
5. Beach Street and Leavenworth Street
6. Beach Street and Larkin Street
7. Beach Street and Polk Street
8. Beach Street and Columbus Avenue

#### B. Existing Weekend Conditions (Table 3.4-3)

1. Jefferson Street and Jones Street
2. Beach Street and Jones Street
3. Beach Street and Hyde Street
4. Jefferson Street and Leavenworth Street
5. Beach Street and Leavenworth Street
6. Beach Street and Larkin Street
7. Beach Street and Polk Street
8. Beach Street and Columbus Avenue

HCM Signalized Intersection Capacity Analysis  
 1: Jefferson St. & Jones St.

Existing PM  
 7/27/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations				↕↕	↕	
Volume (vph)	0	0	58	228	58	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)				3.5	3.5	
Lane Util. Factor				0.95	1.00	
Frt				1.00	1.00	
Flt Protected				0.99	0.95	
Satd. Flow (prot)				3504	1770	
Flt Permitted				0.99	0.95	
Satd. Flow (perm)				3504	1770	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	63	248	63	0
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	0	0	0	311	63	0
Turn Type			Perm			
Protected Phases				2	4	
Permitted Phases			2			
Actuated Green, G (s)				26.0	15.0	
Effective Green, g (s)				26.0	15.0	
Actuated g/C Ratio				0.35	0.20	
Clearance Time (s)				3.5	3.5	
Lane Grp Cap (vph)				1215	354	
v/s Ratio Prot					c0.04	
v/s Ratio Perm				0.09		
v/c Ratio				0.26	0.18	
Uniform Delay, d1				17.6	24.9	
Progression Factor				1.00	1.20	
Incremental Delay, d2				0.5	1.1	
Delay (s)				18.1	30.9	
Level of Service				B	C	
Approach Delay (s)	0.0			18.1	30.9	
Approach LOS	A			B	C	

Intersection Summary			
HCM Average Control Delay	20.2	HCM Level of Service	C
HCM Volume to Capacity ratio	0.23		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	34.0
Intersection Capacity Utilization	18.0%	ICU Level of Service	A
Analysis Period (min)	15		

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
2: Beach St. & Jones St.

Existing PM  
7/27/2010

													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations													
Volume (vph)	9	187	17	9	133	14	22	30	15	9	32	12	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.0			4.0			4.0			4.0		
Lane Util. Factor		0.95			1.00			1.00			1.00		
Frbp, ped/bikes		0.98			0.95			0.95			0.90		
Flpb, ped/bikes		0.98			0.99			0.87			0.97		
Frt		0.99			0.99			0.97			0.97		
Flt Protected		1.00			1.00			0.98			0.99		
Satd. Flow (prot)		3357			1730			1478			1566		
Flt Permitted		0.95			0.98			0.92			0.96		
Satd. Flow (perm)		3182			1708			1375			1519		
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	10	203	18	10	145	15	24	33	16	10	35	13	
RTOR Reduction (vph)	0	7	0	0	5	0	0	12	0	0	10	0	
Lane Group Flow (vph)	0	224	0	0	165	0	0	61	0	0	48	0	
Confl. Peds. (#/hr)	260		110	110		260	180		150	150		180	
Turn Type	Perm			Perm			Perm			Perm			
Protected Phases		2			6			4			8		
Permitted Phases	2			6			4			8			
Actuated Green, G (s)		45.5			45.5			18.5			18.5		
Effective Green, g (s)		45.5			45.5			18.5			18.5		
Actuated g/C Ratio		0.61			0.61			0.25			0.25		
Clearance Time (s)		4.0			4.0			4.0			4.0		
Lane Grp Cap (vph)		1930			1036			339			375		
v/s Ratio Prot													
v/s Ratio Perm		0.07			0.10			0.04			0.03		
v/c Ratio		0.12			0.16			0.18			0.13		
Uniform Delay, d1		6.2			6.4			22.3			22.0		
Progression Factor		1.00			1.00			1.00			2.04		
Incremental Delay, d2		0.1			0.3			1.2			0.7		
Delay (s)		6.4			6.8			23.4			45.5		
Level of Service		A			A			C			D		
Approach Delay (s)		6.4			6.8			23.4			45.5		
Approach LOS		A			A			C			D		
<b>Intersection Summary</b>													
HCM Average Control Delay			13.1									HCM Level of Service	B
HCM Volume to Capacity ratio			0.16										
Actuated Cycle Length (s)			75.0									Sum of lost time (s)	8.0
Intersection Capacity Utilization			36.1%									ICU Level of Service	A
Analysis Period (min)			15										
c Critical Lane Group													

HCM Signalized Intersection Capacity Analysis  
3: Beach St. & Hyde St.

Existing PM  
7/27/2010



Movement	EBT	EBR	WBL	WBT	NBR	SBL	SBT	SBR	SER
Lane Configurations	↑↑			↑	↑	↑	↑↓		↑
Volume (vph)	140	22	22	155	58	84	82	86	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	3.6			3.6	3.6	3.6	3.6	4.0	
Lane Util. Factor	0.95			1.00	1.00	0.95	0.95	1.00	
Frb, ped/bikes	0.92			1.00	0.73	1.00	0.74	1.00	
Flpb, ped/bikes	1.00			0.95	1.00	0.66	0.98	1.00	
Frt	0.98			1.00	0.86	1.00	0.93	0.86	
Flt Protected	1.00			0.99	1.00	0.95	1.00	1.00	
Satd. Flow (prot)	3206			1753	1172	1114	1196	1611	
Flt Permitted	1.00			0.96	1.00	0.95	1.00	1.00	
Satd. Flow (perm)	3206			1691	1172	1114	1196	1611	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	152	24	24	168	63	91	89	93	9
RTOR Reduction (vph)	14	0	0	0	39	0	0	0	0
Lane Group Flow (vph)	162	0	0	192	24	82	191	0	9
Confl. Peds. (#/hr)	300		300	340		340	250		
Turn Type	Perm			custom		Perm		custom	
Protected Phases	2		2		8		1		
Permitted Phases	2		4		8		1		
Actuated Green, G (s)	21.7		21.7		20.9	20.9	20.9	0.7	
Effective Green, g (s)	21.7		21.7		20.9	20.9	20.9	0.7	
Actuated g/C Ratio	0.40		0.40		0.38	0.38	0.38	0.01	
Clearance Time (s)	3.6		3.6		3.6	3.6	3.6	4.0	
Vehicle Extension (s)	3.0		3.0		3.0	3.0	3.0	3.0	
Lane Grp Cap (vph)	1277		673		449	427	459	21	
v/s Ratio Prot	0.05						c0.01		
v/s Ratio Perm			c0.11	0.02	0.07	0.16			
v/c Ratio	0.13		0.29	0.05	0.19	0.42	0.43		
Uniform Delay, d1	10.4		11.1	10.6	11.2	12.3	26.7		
Progression Factor	1.00		1.00	1.00	1.00	1.00	1.00		
Incremental Delay, d2	0.2		1.1	0.1	0.2	0.6	13.4		
Delay (s)	10.6		12.2	10.6	11.4	12.9	40.1		
Level of Service	B		B	B	B	B	D		
Approach Delay (s)	10.6		12.2		12.5				
Approach LOS	B		B		B				

Intersection Summary			
HCM Average Control Delay	12.1	HCM Level of Service	B
HCM Volume to Capacity ratio	0.35		
Actuated Cycle Length (s)	54.5	Sum of lost time (s)	11.2
Intersection Capacity Utilization	66.2%	ICU Level of Service	C
Analysis Period (min)	15		

c Critical Lane Group

HCM Unsignalized Intersection Capacity Analysis  
 4: Jefferson St. & Leavenworth St.


Existing PM  
 7/27/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕↕			↕			↕	
Sign Control		Stop			Stop			Stop			Stop	
Volume (vph)	0	0	0	78	208	0	88	14	0	0	15	2
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	0	0	0	85	226	0	96	15	0	0	16	2
Direction, Lane #	WB 1	WB 2	NB 1	SB 1								
Volume Total (vph)	198	113	111	18								
Volume Left (vph)	85	0	96	0								
Volume Right (vph)	0	0	0	2								
Hadj (s)	0.25	0.03	0.21	-0.04								
Departure Headway (s)	5.1	4.9	4.9	4.8								
Degree Utilization, x	0.28	0.15	0.15	0.02								
Capacity (veh/h)	694	719	702	704								
Control Delay (s)	8.8	7.5	8.7	7.9								
Approach Delay (s)	8.4		8.7	7.9								
Approach LOS	A		A	A								
Intersection Summary												
Delay			8.4									
HCM Level of Service			A									
Intersection Capacity Utilization			32.6%		ICU Level of Service					A		
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis  
 5: Beach St. & Leavenworth St.


Existing PM  
 7/27/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔			↔↔			↔↔			↔↔	
Sign Control		Stop			Stop			Stop			Stop	
Volume (vph)	64	143	10	38	124	10	8	33	24	41	48	9
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	70	155	11	41	135	11	9	36	26	45	52	10
Direction, Lane #	EB 1	EB 2	WB 1	NB 1	SB 1							
Volume Total (vph)	147	89	187	71	107							
Volume Left (vph)	70	0	41	9	45							
Volume Right (vph)	0	11	11	26	10							
Hadj (s)	0.27	-0.05	0.04	-0.16	0.06							
Departure Headway (s)	5.4	5.1	4.8	4.9	5.1							
Degree Utilization, x	0.22	0.13	0.25	0.10	0.15							
Capacity (veh/h)	633	677	713	666	648							
Control Delay (s)	8.7	7.6	9.4	8.4	9.0							
Approach Delay (s)	8.3		9.4	8.4	9.0							
Approach LOS	A		A	A	A							
Intersection Summary												
Delay			8.8									
HCM Level of Service			A									
Intersection Capacity Utilization			49.9%		ICU Level of Service		A					
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis  
 6: Beach St. & Larkin St.


Existing PM  
 7/27/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↷			↶	↷	
Sign Control	Stop			Stop	Stop	
Volume (vph)	82	21	66	173	25	75
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	89	23	72	188	27	82
Direction, Lane #	EB 1	WB 1	NB 1			
Volume Total (vph)	112	260	109			
Volume Left (vph)	0	72	27			
Volume Right (vph)	23	0	82			
Hadj (s)	-0.09	0.09	-0.37			
Departure Headway (s)	4.3	4.4	4.4			
Degree Utilization, x	0.14	0.32	0.13			
Capacity (veh/h)	796	796	762			
Control Delay (s)	8.0	9.4	8.0			
Approach Delay (s)	8.0	9.4	8.0			
Approach LOS	A	A	A			
Intersection Summary						
Delay			8.7			
HCM Level of Service			A			
Intersection Capacity Utilization	39.4%			ICU Level of Service	A	
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis  
7: Beach St. & Polk St.


Existing PM  
7/27/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↷			↶	↷	
Sign Control	Stop			Stop	Stop	
Volume (vph)	22	32	178	15	15	76
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	24	35	193	16	16	83
Direction, Lane #	EB 1	WB 1	NB 1			
Volume Total (vph)	59	210	99			
Volume Left (vph)	0	193	16			
Volume Right (vph)	35	0	83			
Hadj (s)	-0.32	0.22	-0.43			
Departure Headway (s)	4.0	4.4	4.1			
Degree Utilization, x	0.07	0.26	0.11			
Capacity (veh/h)	861	791	828			
Control Delay (s)	7.3	8.9	7.6			
Approach Delay (s)	7.3	8.9	7.6			
Approach LOS	A	A	A			
Intersection Summary						
Delay			8.3			
HCM Level of Service			A			
Intersection Capacity Utilization			36.5%	ICU Level of Service	A	
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis  
 8: Beach St. & Columbus

Existing PM  
 7/27/2010




Movement	EBT	EBR	WBL	WBT	NWL	NWR
Lane Configurations	↑↑			↑	↑↑	
Sign Control	Stop			Stop	Stop	
Volume (vph)	187	97	21	125	47	30
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	203	105	23	136	51	33

Direction, Lane #	EB 1	EB 2	WB 1	NW 1
Volume Total (vph)	136	173	159	84
Volume Left (vph)	0	0	23	51
Volume Right (vph)	0	105	0	33
Hadj (s)	0.03	-0.39	0.06	-0.08
Departure Headway (s)	4.9	4.5	4.6	4.8
Degree Utilization, x	0.18	0.21	0.20	0.11
Capacity (veh/h)	723	788	758	689
Control Delay (s)	7.8	7.5	8.7	8.4
Approach Delay (s)	7.6		8.7	8.4
Approach LOS	A		A	A

Intersection Summary			
Delay		8.1	
HCM Level of Service		A	
Intersection Capacity Utilization	35.5%		ICU Level of Service A
Analysis Period (min)	15		

HCM Signalized Intersection Capacity Analysis  
 1: Jefferson St. & Jones St.

Existing Weekend MID  
 7/27/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations				↕↕	↕	
Volume (vph)	0	0	181	430	121	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)				3.5	3.5	
Lane Util. Factor				0.95	1.00	
Frt				1.00	1.00	
Flt Protected				0.99	0.95	
Satd. Flow (prot)				3487	1770	
Flt Permitted				0.99	0.95	
Satd. Flow (perm)				3487	1770	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	197	467	132	0
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	0	0	0	664	132	0
Turn Type			Perm			
Protected Phases				2	4	
Permitted Phases			2			
Actuated Green, G (s)				26.0	15.0	
Effective Green, g (s)				26.0	15.0	
Actuated g/C Ratio				0.35	0.20	
Clearance Time (s)				3.5	3.5	
Lane Grp Cap (vph)				1209	354	
v/s Ratio Prot					c0.07	
v/s Ratio Perm				0.19		
v/c Ratio				0.55	0.37	
Uniform Delay, d1				19.8	25.9	
Progression Factor				1.00	1.07	
Incremental Delay, d2				1.8	2.4	
Delay (s)				21.6	30.0	
Level of Service				C	C	
Approach Delay (s)	0.0			21.6	30.0	
Approach LOS	A			C	C	

Intersection Summary			
HCM Average Control Delay		23.0	HCM Level of Service C
HCM Volume to Capacity ratio		0.48	
Actuated Cycle Length (s)		75.0	Sum of lost time (s) 34.0
Intersection Capacity Utilization		30.5%	ICU Level of Service A
Analysis Period (min)		15	

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
2: Beach St. & Jones St.

Existing Weekend MID  
7/27/2010

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	49	412	99	33	229	21	109	61	45	61	68	53
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.0			4.0			4.0			4.0	
Lane Util. Factor		0.95			1.00			1.00			1.00	
Frbp, ped/bikes		0.91			0.95			0.93			0.83	
Flpb, ped/bikes		0.97			0.98			0.83			0.94	
Frt		0.97			0.99			0.97			0.96	
Flt Protected		1.00			0.99			0.98			0.98	
Satd. Flow (prot)		3015			1703			1358			1376	
Flt Permitted		0.90			0.90			0.70			0.83	
Satd. Flow (perm)		2730			1547			969			1159	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	53	448	108	36	249	23	118	66	49	66	74	58
RTOR Reduction (vph)	0	24	0	0	4	0	0	13	0	0	20	0
Lane Group Flow (vph)	0	585	0	0	304	0	0	220	0	0	178	0
Confl. Peds. (#/hr)	528		226	226		528	367		293	293		367
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases		2			6			4			8	
Permitted Phases	2			6			4			8		
Actuated Green, G (s)		45.5			45.5			18.5			18.5	
Effective Green, g (s)		45.5			45.5			18.5			18.5	
Actuated g/C Ratio		0.61			0.61			0.25			0.25	
Clearance Time (s)		4.0			4.0			4.0			4.0	
Lane Grp Cap (vph)		1656			939			239			286	
v/s Ratio Prot												
v/s Ratio Perm		c0.21			0.20			c0.23			0.15	
v/c Ratio		0.35			0.32			0.92			0.62	
Uniform Delay, d1		7.4			7.2			27.5			25.2	
Progression Factor		1.00			1.00			1.00			1.79	
Incremental Delay, d2		0.6			0.9			40.9			8.4	
Delay (s)		8.0			8.1			68.5			53.4	
Level of Service		A			A			E			D	
Approach Delay (s)		8.0			8.1			68.5			53.4	
Approach LOS		A			A			E			D	
<b>Intersection Summary</b>												
HCM Average Control Delay			25.1									HCM Level of Service C
HCM Volume to Capacity ratio			0.49									
Actuated Cycle Length (s)			75.0								8.0	
Intersection Capacity Utilization			64.1%									ICU Level of Service C
Analysis Period (min)			15									
c Critical Lane Group												

HCM Signalized Intersection Capacity Analysis  
3: Beach St. & Hyde St.

Existing Weekend MID  
7/27/2010




Movement	EBT	EBR	WBL	WBT	NBR	SBL	SBT	SBR	SER
Lane Configurations	↑↑			↑	↑	↑	↑↓		↑
Volume (vph)	308	64	42	237	134	255	164	215	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	3.6			3.6	3.6	3.6	3.6		4.0
Lane Util. Factor	0.95			1.00	1.00	0.95	0.95		1.00
Frb, ped/bikes	0.88			1.00	0.69	1.00	0.63		1.00
Flpb, ped/bikes	1.00			0.95	1.00	0.58	0.97		1.00
Frt	0.97			1.00	0.86	1.00	0.92		0.86
Flt Protected	1.00			0.99	1.00	0.95	1.00		1.00
Satd. Flow (prot)	3033			1750	1113	974	991		1611
Flt Permitted	1.00			0.89	1.00	0.95	1.00		1.00
Satd. Flow (perm)	3033			1573	1113	974	991		1611
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	335	70	46	258	146	277	178	234	9
RTOR Reduction (vph)	25	0	0	0	68	0	0	0	0
Lane Group Flow (vph)	380	0	0	304	78	249	440	0	9
Confl. Peds. (#/hr)		542	542		563	563		552	
Turn Type			Perm		custom		Perm		custom
Protected Phases	2			2			8		1
Permitted Phases			2		4	8			1
Actuated Green, G (s)	16.6			16.6	32.4	32.4	32.4		0.7
Effective Green, g (s)	16.6			16.6	32.4	32.4	32.4		0.7
Actuated g/C Ratio	0.27			0.27	0.53	0.53	0.53		0.01
Clearance Time (s)	3.6			3.6	3.6	3.6	3.6		4.0
Vehicle Extension (s)	3.0			3.0	3.0	3.0	3.0		3.0
Lane Grp Cap (vph)	827			429	592	518	527		19
v/s Ratio Prot	0.13								c0.01
v/s Ratio Perm				c0.19	0.07	0.26	0.44		
v/c Ratio	0.46			0.71	0.13	0.48	0.83		0.47
Uniform Delay, d1	18.4			20.0	7.2	9.0	12.0		29.9
Progression Factor	1.00			1.00	1.00	1.00	1.00		1.00
Incremental Delay, d2	1.8			9.5	0.1	0.7	11.0		17.5
Delay (s)	20.3			29.5	7.3	9.7	23.0		47.4
Level of Service	C			C	A	A	C		D
Approach Delay (s)	20.3			29.5			18.2		
Approach LOS	C			C			B		

Intersection Summary			
HCM Average Control Delay	20.1	HCM Level of Service	C
HCM Volume to Capacity ratio	0.79		
Actuated Cycle Length (s)	60.9	Sum of lost time (s)	11.2
Intersection Capacity Utilization	69.0%	ICU Level of Service	C
Analysis Period (min)	15		

c Critical Lane Group

HCM Unsignalized Intersection Capacity Analysis  
 4: Jefferson St. & Leavenworth St.

Existing Weekend MID  
 7/27/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕↕			↕			↕	
Sign Control		Stop			Stop			Stop			Stop	
Volume (vph)	0	0	0	98	427	7	100	10	0	0	25	6
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	0	0	0	107	464	8	109	11	0	0	27	7
Direction, Lane #	WB 1	WB 2	NB 1	SB 1								
Volume Total (vph)	339	240	120	34								
Volume Left (vph)	107	0	109	0								
Volume Right (vph)	0	8	0	7								
Hadj (s)	0.19	0.01	0.22	-0.08								
Departure Headway (s)	5.1	4.9	5.4	5.3								
Degree Utilization, x	0.48	0.33	0.18	0.05								
Capacity (veh/h)	683	713	628	632								
Control Delay (s)	11.6	9.2	9.6	8.5								
Approach Delay (s)	10.6		9.6	8.5								
Approach LOS	B		A	A								
Intersection Summary												
Delay			10.3									
HCM Level of Service			B									
Intersection Capacity Utilization			35.1%	ICU Level of Service	A							
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis  
5: Beach St. & Leavenworth St.

Existing Weekend MID  
7/27/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔			↔↔			↔↔			↔↔	
Sign Control		Stop			Stop			Stop			Stop	
Volume (vph)	126	377	45	88	244	58	15	83	118	69	46	12
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	137	410	49	96	265	63	16	90	128	75	50	13
Direction, Lane #	EB 1	EB 2	WB 1	NB 1	SB 1							
Volume Total (vph)	342	254	424	235	138							
Volume Left (vph)	137	0	96	16	75							
Volume Right (vph)	0	49	63	128	13							
Hadj (s)	0.23	-0.10	-0.01	-0.28	0.09							
Departure Headway (s)	6.9	6.5	6.3	6.8	7.5							
Degree Utilization, x	0.65	0.46	0.75	0.44	0.29							
Capacity (veh/h)	507	534	546	476	421							
Control Delay (s)	20.7	13.8	25.7	15.0	13.5							
Approach Delay (s)	17.8		25.7	15.0	13.5							
Approach LOS	C		D	C	B							
Intersection Summary												
Delay			19.3									
HCM Level of Service			C									
Intersection Capacity Utilization			79.3%		ICU Level of Service		D					
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis  
 6: Beach St. & Larkin St.

Existing Weekend MID  
 7/27/2010




Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↷			↶	↷	
Sign Control	Stop			Stop	Stop	
Volume (vph)	212	78	167	291	66	169
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	230	85	182	316	72	184

Direction, Lane #	EB 1	WB 1	NB 1
Volume Total (vph)	315	498	255
Volume Left (vph)	0	182	72
Volume Right (vph)	85	0	184
Hadj (s)	-0.13	0.11	-0.34
Departure Headway (s)	5.3	5.2	5.6
Degree Utilization, x	0.46	0.73	0.40
Capacity (veh/h)	649	670	582
Control Delay (s)	12.7	20.8	12.3
Approach Delay (s)	12.7	20.8	12.3
Approach LOS	B	C	B

Intersection Summary			
Delay		16.4	
HCM Level of Service		C	
Intersection Capacity Utilization	75.1%		ICU Level of Service D
Analysis Period (min)		15	

HCM Unsignalized Intersection Capacity Analysis  
7: Beach St. & Polk St.


Existing Weekend MID  
7/27/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↷			↷	↷	
Sign Control	Stop			Stop	Stop	
Volume (vph)	48	37	306	46	41	252
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	52	40	333	50	45	274
Direction, Lane #	EB 1	WB 1	NB 1			
Volume Total (vph)	92	383	318			
Volume Left (vph)	0	333	45			
Volume Right (vph)	40	0	274			
Hadj (s)	-0.23	0.21	-0.45			
Departure Headway (s)	5.0	5.0	4.7			
Degree Utilization, x	0.13	0.54	0.41			
Capacity (veh/h)	657	684	715			
Control Delay (s)	8.7	13.7	10.9			
Approach Delay (s)	8.7	13.7	10.9			
Approach LOS	A	B	B			
Intersection Summary						
Delay			12.0			
HCM Level of Service			B			
Intersection Capacity Utilization			55.7%	ICU Level of Service	B	
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis  
8: Beach St. & Columbus

Existing Weekend MID  
7/27/2010



Movement	EBT	EBR	WBL	WBT	NWL	NWR
Lane Configurations	↑↑			↑	↑↑	
Sign Control	Stop			Stop	Stop	
Volume (vph)	472	219	46	213	66	76
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	513	238	50	232	72	83
Direction, Lane #	EB 1	EB 2	WB 1	NW 1		
Volume Total (vph)	342	409	282	154		
Volume Left (vph)	0	0	50	72		
Volume Right (vph)	0	238	0	83		
Hadj (s)	0.03	-0.37	0.07	-0.19		
Departure Headway (s)	5.3	4.9	5.3	5.7		
Degree Utilization, x	0.50	0.56	0.41	0.25		
Capacity (veh/h)	661	724	661	569		
Control Delay (s)	12.4	12.6	11.9	10.6		
Approach Delay (s)	12.5		11.9	10.6		
Approach LOS	B		B	B		
Intersection Summary						
Delay			12.1			
HCM Level of Service			B			
Intersection Capacity Utilization			54.6%		ICU Level of Service	A
Analysis Period (min)			15			

## Level of Service Calculation Sheets

### C. Existing Plus Project Weekday Conditions (Table 4.4-1) (Semi-Exclusive and Shared Lane Options)

1. Jefferson Street and Jones Street
2. Beach Street and Jones Street
3. Beach Street and Hyde Street
4. Jefferson Street and Leavenworth Street
5. Beach Street and Leavenworth Street
6. Beach Street and Larkin Street
7. Beach Street and Polk Street
8. Beach Street and Columbus Avenue

HCM Signalized Intersection Capacity Analysis  
 1: Jefferson St. & Jones St.

Semi-Exclusive Option  
 9/1/2010




Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations			↶	↷	↶	
Volume (vph)	0	0	58	228	58	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)			3.5	3.5	3.5	
Lane Util. Factor			1.00	1.00	1.00	
Frt			1.00	1.00	1.00	
Flt Protected			0.95	1.00	0.95	
Satd. Flow (prot)			1770	1863	1770	
Flt Permitted			0.95	1.00	0.95	
Satd. Flow (perm)			1770	1863	1770	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	63	248	63	0
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	0	0	63	248	63	0
Turn Type			Perm			
Protected Phases				2	4	
Permitted Phases			2			
Actuated Green, G (s)			26.0	26.0	15.0	
Effective Green, g (s)			26.0	26.0	15.0	
Actuated g/C Ratio			0.35	0.35	0.20	
Clearance Time (s)			3.5	3.5	3.5	
Lane Grp Cap (vph)			614	646	354	
v/s Ratio Prot				c0.13	c0.04	
v/s Ratio Perm			0.04			
v/c Ratio			0.10	0.38	0.18	
Uniform Delay, d1			16.6	18.5	24.9	
Progression Factor			1.00	1.00	1.17	
Incremental Delay, d2			0.3	1.7	1.1	
Delay (s)			16.9	20.2	30.1	
Level of Service			B	C	C	
Approach Delay (s)	0.0			19.5	30.1	
Approach LOS	A			B	C	

Intersection Summary			
HCM Average Control Delay	21.3	HCM Level of Service	C
HCM Volume to Capacity ratio	0.31		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	34.0
Intersection Capacity Utilization	22.0%	ICU Level of Service	A
Analysis Period (min)	15		

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
 1: Jefferson St. & Jones St.

Shared Lane Option  
 9/1/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations				↕↕	↕	
Volume (vph)	0	0	58	228	58	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)				3.5	3.5	
Lane Util. Factor				0.95	1.00	
Frt				1.00	1.00	
Flt Protected				0.99	0.95	
Satd. Flow (prot)				3504	1770	
Flt Permitted				0.99	0.95	
Satd. Flow (perm)				3504	1770	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	63	248	63	0
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	0	0	0	311	63	0
Turn Type			Perm			
Protected Phases				2	4	
Permitted Phases			2			
Actuated Green, G (s)				26.0	15.0	
Effective Green, g (s)				26.0	15.0	
Actuated g/C Ratio				0.35	0.20	
Clearance Time (s)				3.5	3.5	
Lane Grp Cap (vph)				1215	354	
v/s Ratio Prot					c0.04	
v/s Ratio Perm				0.09		
v/c Ratio				0.26	0.18	
Uniform Delay, d1				17.6	24.9	
Progression Factor				1.00	1.29	
Incremental Delay, d2				0.5	1.1	
Delay (s)				18.1	33.1	
Level of Service				B	C	
Approach Delay (s)	0.0			18.1	33.1	
Approach LOS	A			B	C	

Intersection Summary			
HCM Average Control Delay	20.6	HCM Level of Service	C
HCM Volume to Capacity ratio	0.23		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	34.0
Intersection Capacity Utilization	18.0%	ICU Level of Service	A
Analysis Period (min)	15		

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
2: Beach St. & Jones St.

Semi-Exclusive Option

9/1/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Volume (vph)	9	187	17	9	133	14	22	30	15	9	32	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.0			4.0			4.0			4.0	
Lane Util. Factor		1.00			1.00			1.00			1.00	
Frbp, ped/bikes		0.98			0.95			0.92			0.90	
Flpb, ped/bikes		0.98			0.99			0.87			0.95	
Frt		0.99			0.99			0.97			0.97	
Flt Protected		1.00			1.00			0.98			0.99	
Satd. Flow (prot)		1769			1731			1428			1531	
Flt Permitted		0.99			0.98			0.92			0.96	
Satd. Flow (perm)		1755			1710			1329			1486	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	10	203	18	10	145	15	24	33	16	10	35	13
RTOR Reduction (vph)	0	4	0	0	5	0	0	12	0	0	10	0
Lane Group Flow (vph)	0	227	0	0	165	0	0	61	0	0	48	0
Confl. Peds. (#/hr)	260		110	110		260	180		150	150		180
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases		2			6			4			8	
Permitted Phases	2			6			4			8		
Actuated Green, G (s)		45.5			45.5			18.5			18.5	
Effective Green, g (s)		45.5			45.5			18.5			18.5	
Actuated g/C Ratio		0.61			0.61			0.25			0.25	
Clearance Time (s)		4.0			4.0			4.0			4.0	
Lane Grp Cap (vph)		1065			1037			328			367	
v/s Ratio Prot												
v/s Ratio Perm		c0.13			0.10			c0.05			0.03	
v/c Ratio		0.21			0.16			0.19			0.13	
Uniform Delay, d1		6.7			6.4			22.3			22.0	
Progression Factor		0.51			1.00			1.00			2.09	
Incremental Delay, d2		0.4			0.3			1.2			0.7	
Delay (s)		3.8			6.8			23.6			46.8	
Level of Service		A			A			C			D	
Approach Delay (s)		3.8			6.8			23.6			46.8	
Approach LOS		A			A			C			D	

Intersection Summary

HCM Average Control Delay	12.2	HCM Level of Service	B
HCM Volume to Capacity ratio	0.20		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	8.0
Intersection Capacity Utilization	34.2%	ICU Level of Service	A
Analysis Period (min)	15		

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
2: Beach St. & Jones St.

Shared Lane Option  
9/1/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕	↗		↕			↕			↕		
Volume (vph)	9	187	17	9	133	14	22	30	15	9	32	12	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.0	4.0		4.0			4.0			4.0		
Lane Util. Factor		1.00	1.00		1.00			1.00			1.00		
Frbp, ped/bikes		1.00	0.73		0.95			0.92			0.90		
Flpb, ped/bikes		0.98	1.00		0.99			0.87			0.95		
Frt		1.00	0.85		0.99			0.97			0.97		
Flt Protected		1.00	1.00		1.00			0.98			0.99		
Satd. Flow (prot)		1823	1152		1729			1428			1531		
Flt Permitted		0.99	1.00		0.99			0.92			0.96		
Satd. Flow (perm)		1808	1152		1709			1329			1486		
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	
Adj. Flow (vph)	10	203	18	10	145	15	24	33	16	10	35	13	
RTOR Reduction (vph)	0	0	7	0	5	0	0	12	0	0	10	0	
Lane Group Flow (vph)	0	213	11	0	165	0	0	61	0	0	48	0	
Confl. Peds. (#/hr)	260		110	110		260	180		150	150		180	
Turn Type	Perm		Perm	Perm			Perm			Perm			
Protected Phases		2			6			4			8		
Permitted Phases	2		2	6			4			8			
Actuated Green, G (s)		45.5	45.5		45.5			18.5			18.5		
Effective Green, g (s)		45.5	45.5		45.5			18.5			18.5		
Actuated g/C Ratio		0.61	0.61		0.61			0.25			0.25		
Clearance Time (s)		4.0	4.0		4.0			4.0			4.0		
Lane Grp Cap (vph)		1097	699		1037			328			367		
v/s Ratio Prot													
v/s Ratio Perm		c0.12	0.01		0.10			c0.05			0.03		
v/c Ratio		0.19	0.02		0.16			0.19			0.13		
Uniform Delay, d1		6.6	5.9		6.4			22.3			22.0		
Progression Factor		0.63	0.42		1.00			1.00			2.04		
Incremental Delay, d2		0.4	0.0		0.3			1.2			0.7		
Delay (s)		4.5	2.5		6.8			23.6			45.6		
Level of Service		A	A		A			C			D		
Approach Delay (s)		4.4			6.8			23.6			45.6		
Approach LOS		A			A			C			D		
<b>Intersection Summary</b>													
HCM Average Control Delay			12.3									HCM Level of Service	B
HCM Volume to Capacity ratio			0.18										
Actuated Cycle Length (s)			75.0									Sum of lost time (s)	8.0
Intersection Capacity Utilization			50.0%									ICU Level of Service	A
Analysis Period (min)			15										
c Critical Lane Group													

HCM Signalized Intersection Capacity Analysis  
3: Beach St. & Hyde St.

Semi-Exclusive Option  
9/1/2010



Movement	EBT	EBR	WBL	WBT	NBR	SBL	SBT	SBR	SER
Lane Configurations	↔			↔	↔	↔	↔		↔
Volume (vph)	140	22	22	155	58	84	82	86	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	3.6			3.6	3.6	3.6	3.6		4.0
Lane Util. Factor	1.00			1.00	1.00	1.00	1.00		1.00
Frb, ped/bikes	0.92			1.00	0.73	1.00	0.73		1.00
Flpb, ped/bikes	1.00			0.95	1.00	0.66	1.00		1.00
Frt	0.98			1.00	0.86	1.00	0.92		0.86
Flt Protected	1.00			0.99	1.00	0.95	1.00		1.00
Satd. Flow (prot)	1691			1753	1172	1172	1255		1611
Flt Permitted	1.00			0.96	1.00	0.95	1.00		1.00
Satd. Flow (perm)	1691			1693	1172	1172	1255		1611
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	152	24	24	168	63	91	89	93	9
RTOR Reduction (vph)	7	0	0	0	39	0	0	0	0
Lane Group Flow (vph)	169	0	0	192	24	91	182	0	9
Confl. Peds. (#/hr)		300	300		340	340		250	
Turn Type			Perm		custom	Perm			custom
Protected Phases	2			2			8		1
Permitted Phases			2		4	8			1
Actuated Green, G (s)	21.7			21.7	20.9	20.9	20.9		0.7
Effective Green, g (s)	21.7			21.7	20.9	20.9	20.9		0.7
Actuated g/C Ratio	0.40			0.40	0.38	0.38	0.38		0.01
Clearance Time (s)	3.6			3.6	3.6	3.6	3.6		4.0
Vehicle Extension (s)	3.0			3.0	3.0	3.0	3.0		3.0
Lane Grp Cap (vph)	673			674	449	449	481		21
v/s Ratio Prot	0.10						c0.15		c0.01
v/s Ratio Perm				c0.11	0.02	0.08			
v/c Ratio	0.25			0.28	0.05	0.20	0.38		0.43
Uniform Delay, d1	11.0			11.1	10.6	11.2	12.1		26.7
Progression Factor	1.00			1.00	1.00	1.00	1.00		1.00
Incremental Delay, d2	0.9			1.1	0.1	0.2	0.5		13.4
Delay (s)	11.9			12.2	10.6	11.5	12.6		40.1
Level of Service	B			B	B	B	B		D
Approach Delay (s)	11.9			12.2			12.2		
Approach LOS	B			B			B		

Intersection Summary			
HCM Average Control Delay	12.3	HCM Level of Service	B
HCM Volume to Capacity ratio	0.33		
Actuated Cycle Length (s)	54.5	Sum of lost time (s)	11.2
Intersection Capacity Utilization	66.5%	ICU Level of Service	C
Analysis Period (min)	15		

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
3: Beach St. & Hyde St.

Shared Lane Option  
9/1/2010




Movement	EBT	WBL	WBT	NBR	SBL	SBT	SBR	SER
Lane Configurations	↑		↔	↔	↔	↔		↔
Volume (vph)	162	22	155	58	84	82	86	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	3.6		3.6	3.6	3.6	3.6		4.0
Lane Util. Factor	1.00		1.00	1.00	1.00	1.00		1.00
Frbp, ped/bikes	1.00		1.00	0.73	1.00	0.73		1.00
Flpb, ped/bikes	1.00		0.95	1.00	0.66	1.00		1.00
Frt	1.00		1.00	0.86	1.00	0.92		0.86
Flt Protected	1.00		0.99	1.00	0.95	1.00		1.00
Satd. Flow (prot)	1863		1753	1172	1172	1255		1611
Flt Permitted	1.00		0.96	1.00	0.95	1.00		1.00
Satd. Flow (perm)	1863		1693	1172	1172	1255		1611
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	176	24	168	63	91	89	93	9
RTOR Reduction (vph)	0	0	0	39	0	0	0	0
Lane Group Flow (vph)	176	0	192	24	91	182	0	9
Confl. Peds. (#/hr)		300		340	340		250	
Turn Type		Perm		custom		Perm		custom
Protected Phases	2		2			8		1
Permitted Phases		2		4		8		1
Actuated Green, G (s)	21.7		21.7	20.9	20.9	20.9		0.7
Effective Green, g (s)	21.7		21.7	20.9	20.9	20.9		0.7
Actuated g/C Ratio	0.40		0.40	0.38	0.38	0.38		0.01
Clearance Time (s)	3.6		3.6	3.6	3.6	3.6		4.0
Vehicle Extension (s)	3.0		3.0	3.0	3.0	3.0		3.0
Lane Grp Cap (vph)	742		674	449	449	481		21
v/s Ratio Prot	0.09					c0.15		c0.01
v/s Ratio Perm			c0.11	0.02	0.08			
v/c Ratio	0.24		0.28	0.05	0.20	0.38		0.43
Uniform Delay, d1	10.9		11.1	10.6	11.2	12.1		26.7
Progression Factor	1.00		1.00	1.00	1.00	1.00		1.00
Incremental Delay, d2	0.8		1.1	0.1	0.2	0.5		13.4
Delay (s)	11.7		12.2	10.6	11.5	12.6		40.1
Level of Service	B		B	B	B	B		D
Approach Delay (s)	11.7		12.2			12.2		
Approach LOS	B		B			B		
<b>Intersection Summary</b>								
HCM Average Control Delay			12.3			HCM Level of Service		B
HCM Volume to Capacity ratio			0.33					
Actuated Cycle Length (s)			54.5			Sum of lost time (s)		11.2
Intersection Capacity Utilization			66.2%			ICU Level of Service		C
Analysis Period (min)			15					

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
4: Jefferson St. & Leavenworth St.

Semi-Exclusive Option  
9/1/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Volume (vph)	0	0	0	78	208	0	88	14	0	0	15	2
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)					3.5			3.5			3.5	
Lane Util. Factor					1.00			1.00			1.00	
Frbp, ped/bikes					1.00			1.00			0.98	
Flpb, ped/bikes					0.78			0.84			1.00	
Frt					1.00			1.00			0.98	
Flt Protected					0.99			0.96			1.00	
Satd. Flow (prot)					1432			1503			1793	
Flt Permitted					0.99			0.74			1.00	
Satd. Flow (perm)					1432			1164			1793	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	85	226	0	96	15	0	0	16	2
RTOR Reduction (vph)	0	0	0	0	0	0	0	0	0	0	2	0
Lane Group Flow (vph)	0	0	0	0	311	0	0	111	0	0	16	0
Confl. Peds. (#/hr)				870		570	80					80
Turn Type				Perm		Perm						
Protected Phases					8			2			6	
Permitted Phases				8		2						
Actuated Green, G (s)					21.5			12.5			12.5	
Effective Green, g (s)					21.5			12.5			12.5	
Actuated g/C Ratio					0.29			0.17			0.17	
Clearance Time (s)					3.5			3.5			3.5	
Lane Grp Cap (vph)					411			194			299	
v/s Ratio Prot											0.01	
v/s Ratio Perm					0.22			0.10				
v/c Ratio					0.76			0.57			0.05	
Uniform Delay, d1					24.4			28.8			26.3	
Progression Factor					0.86			1.11			1.00	
Incremental Delay, d2					11.8			11.5			0.3	
Delay (s)					32.6			43.3			26.6	
Level of Service					C			D			C	
Approach Delay (s)		0.0			32.6			43.3			26.6	
Approach LOS		A			C			D			C	
<b>Intersection Summary</b>												
HCM Average Control Delay			35.1									HCM Level of Service D
HCM Volume to Capacity ratio			0.69									
Actuated Cycle Length (s)			75.0									Sum of lost time (s) 41.0
Intersection Capacity Utilization			35.3%									ICU Level of Service A
Analysis Period (min)			15									
c Critical Lane Group												

HCM Signalized Intersection Capacity Analysis  
 4: Jefferson St. & Leavenworth St.

Shared Lane Option  
 9/1/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Volume (vph)	0	0	0	78	208	0	88	14	0	0	15	2
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)					3.5			3.5			3.5	
Lane Util. Factor					1.00			1.00			1.00	
Frbp, ped/bikes					1.00			1.00			0.98	
Flpb, ped/bikes					0.78			0.84			1.00	
Frt					1.00			1.00			0.98	
Flt Protected					0.99			0.96			1.00	
Satd. Flow (prot)					1432			1503			1793	
Flt Permitted					0.99			0.74			1.00	
Satd. Flow (perm)					1432			1164			1793	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	85	226	0	96	15	0	0	16	2
RTOR Reduction (vph)	0	0	0	0	0	0	0	0	0	0	2	0
Lane Group Flow (vph)	0	0	0	0	311	0	0	111	0	0	16	0
Confl. Peds. (#/hr)				870		570	80					80
Turn Type				Perm		Perm						
Protected Phases					8			2			6	
Permitted Phases				8		2						
Actuated Green, G (s)					21.5			12.5			12.5	
Effective Green, g (s)					21.5			12.5			12.5	
Actuated g/C Ratio					0.29			0.17			0.17	
Clearance Time (s)					3.5			3.5			3.5	
Lane Grp Cap (vph)					411			194			299	
v/s Ratio Prot											0.01	
v/s Ratio Perm					0.22			0.10				
v/c Ratio					0.76			0.57			0.05	
Uniform Delay, d1					24.4			28.8			26.3	
Progression Factor					0.89			1.23			1.00	
Incremental Delay, d2					12.1			11.1			0.3	
Delay (s)					33.7			46.4			26.6	
Level of Service					C			D			C	
Approach Delay (s)		0.0			33.7			46.4			26.6	
Approach LOS		A			C			D			C	
<b>Intersection Summary</b>												
HCM Average Control Delay			36.6		HCM Level of Service				D			
HCM Volume to Capacity ratio			0.69									
Actuated Cycle Length (s)			75.0		Sum of lost time (s)				41.0			
Intersection Capacity Utilization			35.3%		ICU Level of Service				A			
Analysis Period (min)			15									
c Critical Lane Group												

HCM Signalized Intersection Capacity Analysis  
5: Beach St. & Leavenworth St.

Semi-Exclusive Option

9/1/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Volume (vph)	64	143	10	38	124	10	8	33	24	41	48	9
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.0			4.0			4.0			4.0	
Lane Util. Factor		1.00			1.00			1.00			1.00	
Frbp, ped/bikes		0.99			0.99			0.87			0.97	
Flpb, ped/bikes		0.96			0.98			0.97			0.87	
Frt		0.99			0.99			0.95			0.99	
Flt Protected		0.99			0.99			0.99			0.98	
Satd. Flow (prot)		1731			1767			1485			1529	
Flt Permitted		0.87			0.91			0.97			0.86	
Satd. Flow (perm)		1533			1622			1444			1342	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	70	155	11	41	135	11	9	36	26	45	52	10
RTOR Reduction (vph)	0	2	0	0	3	0	0	21	0	0	5	0
Lane Group Flow (vph)	0	234	0	0	184	0	0	50	0	0	102	0
Confl. Peds. (#/hr)	210		150	150		210	110		140	140		110
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)		40.0			40.0			15.0			15.0	
Effective Green, g (s)		40.0			40.0			15.0			15.0	
Actuated g/C Ratio		0.53			0.53			0.20			0.20	
Clearance Time (s)		4.0			4.0			4.0			4.0	
Lane Grp Cap (vph)		818			865			289			268	
v/s Ratio Prot												
v/s Ratio Perm		c0.15			0.11			0.03			c0.08	
v/c Ratio		0.29			0.21			0.17			0.38	
Uniform Delay, d1		9.6			9.2			24.9			26.0	
Progression Factor		1.00			0.82			1.00			1.46	
Incremental Delay, d2		0.9			0.6			1.3			3.2	
Delay (s)		10.5			8.1			26.2			41.1	
Level of Service		B			A			C			D	
Approach Delay (s)		10.5			8.1			26.2			41.1	
Approach LOS		B			A			C			D	

Intersection Summary			
HCM Average Control Delay	17.1	HCM Level of Service	B
HCM Volume to Capacity ratio	0.31		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	20.0
Intersection Capacity Utilization	52.6%	ICU Level of Service	A
Analysis Period (min)	15		
c Critical Lane Group			


HCM Signalized Intersection Capacity Analysis  
5: Beach St. & Leavenworth St.

Shared Lane Option  
9/1/2010

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	64	143	10	38	124	10	8	33	24	41	48	9
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.0	4.0		4.0	4.0			4.0			4.0	
Lane Util. Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Frbp, ped/bikes	1.00	0.98		1.00	0.96			0.92			0.97	
Flpb, ped/bikes	1.00	1.00		1.00	1.00			0.97			0.93	
Frt	1.00	0.99		1.00	0.99			0.95			0.99	
Flt Protected	0.95	1.00		0.95	1.00			0.99			0.98	
Satd. Flow (prot)	1770	1800		1770	1772			1586			1629	
Flt Permitted	0.95	1.00		0.95	1.00			0.97			0.86	
Satd. Flow (perm)	1770	1800		1770	1772			1542			1430	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	70	155	11	41	135	11	9	36	26	45	52	10
RTOR Reduction (vph)	0	4	0	0	4	0	0	21	0	0	5	0
Lane Group Flow (vph)	70	162	0	41	142	0	0	50	0	0	102	0
Confl. Peds. (#/hr)	210		150	150		210	110		140	140		110
Turn Type	Prot			Prot			Perm			Perm		
Protected Phases	7	4		3	8			2				6
Permitted Phases							2			6		
Actuated Green, G (s)	6.0	30.0		6.0	30.0			15.0				15.0
Effective Green, g (s)	6.0	30.0		6.0	30.0			15.0				15.0
Actuated g/C Ratio	0.08	0.40		0.08	0.40			0.20				0.20
Clearance Time (s)	4.0	4.0		4.0	4.0			4.0				4.0
Lane Grp Cap (vph)	142	720		142	709			308				286
v/s Ratio Prot	c0.04	c0.09		0.02	0.08							
v/s Ratio Perm								0.03				c0.07
v/c Ratio	0.49	0.23		0.29	0.20			0.16				0.36
Uniform Delay, d1	33.0	14.8		32.5	14.7			24.8				25.8
Progression Factor	1.00	1.00		0.83	0.93			1.00				1.17
Incremental Delay, d2	11.7	0.7		5.0	0.6			1.1				2.8
Delay (s)	44.8	15.6		32.0	14.3			25.9				32.9
Level of Service	D	B		C	B			C				C
Approach Delay (s)		24.2			18.2			25.9				32.9
Approach LOS		C			B			C				C
<b>Intersection Summary</b>												
HCM Average Control Delay			24.1									HCM Level of Service C
HCM Volume to Capacity ratio			0.30									
Actuated Cycle Length (s)			75.0								24.0	
Intersection Capacity Utilization			40.2%									ICU Level of Service A
Analysis Period (min)			15									
c Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis  
 6: Beach St. & Larkin St.


Semi-Exclusive Option  
 9/1/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↷			↶	↷	
Sign Control	Stop			Stop	Stop	
Volume (vph)	82	21	66	173	25	75
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	89	23	72	188	27	82
Direction, Lane #	EB 1	WB 1	NB 1			
Volume Total (vph)	112	260	109			
Volume Left (vph)	0	72	27			
Volume Right (vph)	23	0	82			
Hadj (s)	-0.09	0.09	-0.37			
Departure Headway (s)	4.3	4.4	4.4			
Degree Utilization, x	0.14	0.32	0.13			
Capacity (veh/h)	796	796	762			
Control Delay (s)	8.0	9.4	8.0			
Approach Delay (s)	8.0	9.4	8.0			
Approach LOS	A	A	A			
Intersection Summary						
Delay			8.7			
HCM Level of Service			A			
Intersection Capacity Utilization	39.4%			ICU Level of Service	A	
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis  
6: Beach St. & Larkin St.

Shared Lane Option  
9/1/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↷		↶	↷	↶	
Sign Control	Stop			Stop	Stop	
Volume (vph)	82	21	66	173	25	75
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	89	23	72	188	27	82

Direction, Lane #	EB 1	WB 1	WB 2	NB 1
Volume Total (vph)	112	72	188	109
Volume Left (vph)	0	72	0	27
Volume Right (vph)	23	0	0	82
Hadj (s)	-0.09	0.53	0.03	-0.37
Departure Headway (s)	4.5	5.4	4.9	4.4
Degree Utilization, x	0.14	0.11	0.25	0.13
Capacity (veh/h)	780	647	718	764
Control Delay (s)	8.2	7.8	8.3	8.1
Approach Delay (s)	8.2	8.2		8.1
Approach LOS	A	A		A

Intersection Summary			
Delay		8.2	
HCM Level of Service		A	
Intersection Capacity Utilization	33.3%		ICU Level of Service A
Analysis Period (min)	15		

HCM Signalized Intersection Capacity Analysis  
7: Beach St. & Polk St.

Semi-Exclusive Option  
9/1/2010




Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↩			↩	↩	
Volume (vph)	22	32	178	15	15	76
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.0			4.0	4.0	
Lane Util. Factor	1.00			1.00	1.00	
Frb, ped/bikes	0.93			1.00	0.91	
Flpb, ped/bikes	1.00			1.00	1.00	
Frt	0.92			1.00	0.89	
Flt Protected	1.00			0.96	0.99	
Satd. Flow (prot)	1600			1781	1485	
Flt Permitted	1.00			0.96	0.99	
Satd. Flow (perm)	1600			1781	1485	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	24	35	193	16	16	83
RTOR Reduction (vph)	30	0	0	0	71	0
Lane Group Flow (vph)	29	0	0	209	28	0
Confl. Peds. (#/hr)		80	80		20	50
Turn Type			Split			
Protected Phases	4		8	8	2	
Permitted Phases						
Actuated Green, G (s)	11.0			27.0	11.0	
Effective Green, g (s)	11.0			27.0	11.0	
Actuated g/C Ratio	0.15			0.36	0.15	
Clearance Time (s)	4.0			4.0	4.0	
Lane Grp Cap (vph)	235			641	218	
v/s Ratio Prot	c0.02			c0.12	c0.02	
v/s Ratio Perm						
v/c Ratio	0.12			0.33	0.13	
Uniform Delay, d1	27.8			17.4	27.8	
Progression Factor	1.00			1.00	1.00	
Incremental Delay, d2	1.1			1.4	1.2	
Delay (s)	28.9			18.8	29.1	
Level of Service	C			B	C	
Approach Delay (s)	28.9			18.8	29.1	
Approach LOS	C			B	C	

Intersection Summary			
HCM Average Control Delay	23.2	HCM Level of Service	C
HCM Volume to Capacity ratio	0.24		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	26.0
Intersection Capacity Utilization	50.0%	ICU Level of Service	A
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis  
7: Beach St. & Polk St.

Shared Lane Option  
9/1/2010




Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↩			↩	↩	
Volume (vph)	22	32	178	15	15	76
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.0			4.0	4.0	
Lane Util. Factor	1.00			1.00	1.00	
Frb, ped/bikes	0.88			1.00	0.89	
Flpb, ped/bikes	1.00			1.00	1.00	
Frt	0.92			1.00	0.89	
Flt Protected	1.00			0.96	0.99	
Satd. Flow (prot)	1506			1781	1453	
Flt Permitted	1.00			0.96	0.99	
Satd. Flow (perm)	1506			1781	1453	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	24	35	193	16	16	83
RTOR Reduction (vph)	30	0	0	0	71	0
Lane Group Flow (vph)	29	0	0	209	28	0
Confl. Peds. (#/hr)		80	80		20	50
Turn Type			Split			
Protected Phases	4		8	8	2	
Permitted Phases						
Actuated Green, G (s)	11.0			27.0	11.0	
Effective Green, g (s)	11.0			27.0	11.0	
Actuated g/C Ratio	0.15			0.36	0.15	
Clearance Time (s)	4.0			4.0	4.0	
Lane Grp Cap (vph)	221			641	213	
v/s Ratio Prot	c0.02			c0.12	c0.02	
v/s Ratio Perm						
v/c Ratio	0.13			0.33	0.13	
Uniform Delay, d1	27.8			17.4	27.8	
Progression Factor	1.00			1.00	1.00	
Incremental Delay, d2	1.2			1.4	1.3	
Delay (s)	29.1			18.8	29.1	
Level of Service	C			B	C	
Approach Delay (s)	29.1			18.8	29.1	
Approach LOS	C			B	C	

Intersection Summary			
HCM Average Control Delay	23.2	HCM Level of Service	C
HCM Volume to Capacity ratio	0.24		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	26.0
Intersection Capacity Utilization	37.3%	ICU Level of Service	A
Analysis Period (min)	15		
c Critical Lane Group			

HCM Unsignalized Intersection Capacity Analysis  
 8: Beach St. & Columbus


Semi-Exclusive Option  
 9/1/2010



Movement	EBT	EBR	WBL	WBT	NWL	NWR
Lane Configurations	↑	↗		↑	↖	
Sign Control	Stop			Stop	Stop	
Volume (vph)	187	97	21	125	47	30
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	203	105	23	136	51	33
Direction, Lane #	EB 1	EB 2	WB 1	NW 1		
Volume Total (vph)	203	105	159	84		
Volume Left (vph)	0	0	23	51		
Volume Right (vph)	0	105	0	33		
Hadj (s)	0.03	-0.67	0.06	-0.08		
Departure Headway (s)	4.9	4.2	4.6	4.8		
Degree Utilization, x	0.28	0.12	0.20	0.11		
Capacity (veh/h)	724	837	757	687		
Control Delay (s)	8.5	6.6	8.8	8.4		
Approach Delay (s)	7.9		8.8	8.4		
Approach LOS	A		A	A		
Intersection Summary						
Delay			8.2			
HCM Level of Service			A			
Intersection Capacity Utilization			35.5%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis  
 8: Beach St. & Columbus

Shared Lane Option  
 9/1/2010



Movement	EBT	EBR	WBL	WBT	NWL	NWR
Lane Configurations	↑	↗		↖	↖	↗
Sign Control	Stop			Stop	Stop	
Volume (vph)	187	119	21	125	47	30
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	203	129	23	136	51	33
Direction, Lane #	EB 1	EB 2	WB 1	NW 1		
Volume Total (vph)	203	129	159	84		
Volume Left (vph)	0	0	23	51		
Volume Right (vph)	0	129	0	33		
Hadj (s)	0.03	-0.67	0.06	-0.08		
Departure Headway (s)	4.9	4.2	4.6	4.9		
Degree Utilization, x	0.28	0.15	0.20	0.11		
Capacity (veh/h)	724	838	754	681		
Control Delay (s)	8.5	6.7	8.8	8.5		
Approach Delay (s)	7.8		8.8	8.5		
Approach LOS	A		A	A		
Intersection Summary						
Delay			8.2			
HCM Level of Service			A			
Intersection Capacity Utilization			35.5%		ICU Level of Service	A
Analysis Period (min)			15			

## Level of Service Calculation Sheets

### D. Existing Plus Project Weekend Conditions (Table 4.4-2) (Semi-Exclusive and Shared Lane Options)

1. Jefferson Street and Jones Street
2. Beach Street and Jones Street
3. Beach Street and Hyde Street
4. Jefferson Street and Leavenworth Street
5. Beach Street and Leavenworth Street
6. Beach Street and Larkin Street
7. Beach Street and Polk Street
8. Beach Street and Columbus Avenue

HCM Signalized Intersection Capacity Analysis  
1: Jefferson St. & Jones St.

Semi-Exclusive Option  
8/31/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations			↶	↷	↶	
Volume (vph)	0	0	181	430	121	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)			3.5	3.5	3.5	
Lane Util. Factor			1.00	1.00	1.00	
Frt			1.00	1.00	1.00	
Flt Protected			0.95	1.00	0.95	
Satd. Flow (prot)			1770	1863	1770	
Flt Permitted			0.95	1.00	0.95	
Satd. Flow (perm)			1770	1863	1770	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	197	467	132	0
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	0	0	197	467	132	0
Turn Type			Perm			
Protected Phases				2	4	
Permitted Phases			2			
Actuated Green, G (s)			26.0	26.0	15.0	
Effective Green, g (s)			26.0	26.0	15.0	
Actuated g/C Ratio			0.35	0.35	0.20	
Clearance Time (s)			3.5	3.5	3.5	
Lane Grp Cap (vph)			614	646	354	
v/s Ratio Prot				c0.25	c0.07	
v/s Ratio Perm			0.11			
v/c Ratio			0.32	0.72	0.37	
Uniform Delay, d1			18.0	21.4	25.9	
Progression Factor			1.00	1.00	1.03	
Incremental Delay, d2			1.4	6.9	2.1	
Delay (s)			19.4	28.2	28.8	
Level of Service			B	C	C	
Approach Delay (s)	0.0			25.6	28.8	
Approach LOS	A			C	C	

Intersection Summary			
HCM Average Control Delay	26.2	HCM Level of Service	C
HCM Volume to Capacity ratio	0.59		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	34.0
Intersection Capacity Utilization	36.0%	ICU Level of Service	A
Analysis Period (min)	15		

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
 1: Jefferson St. & Jones St.

Shared Lane Option  
 8/31/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations				↕↕	↕	
Volume (vph)	0	0	181	430	121	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)				3.5	3.5	
Lane Util. Factor				0.95	1.00	
Frt				1.00	1.00	
Flt Protected				0.99	0.95	
Satd. Flow (prot)				3487	1770	
Flt Permitted				0.99	0.95	
Satd. Flow (perm)				3487	1770	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	197	467	132	0
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	0	0	0	664	132	0
Turn Type			Perm			
Protected Phases				2	4	
Permitted Phases			2			
Actuated Green, G (s)				26.0	15.0	
Effective Green, g (s)				26.0	15.0	
Actuated g/C Ratio				0.35	0.20	
Clearance Time (s)				3.5	3.5	
Lane Grp Cap (vph)				1209	354	
v/s Ratio Prot					c0.07	
v/s Ratio Perm				0.19		
v/c Ratio				0.55	0.37	
Uniform Delay, d1				19.8	25.9	
Progression Factor				1.00	1.16	
Incremental Delay, d2				1.8	2.3	
Delay (s)				21.6	32.4	
Level of Service				C	C	
Approach Delay (s)	0.0			21.6	32.4	
Approach LOS	A			C	C	

Intersection Summary			
HCM Average Control Delay		23.4	HCM Level of Service C
HCM Volume to Capacity ratio		0.48	
Actuated Cycle Length (s)		75.0	Sum of lost time (s) 34.0
Intersection Capacity Utilization		30.5%	ICU Level of Service A
Analysis Period (min)		15	

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
2: Beach St. & Jones St.

Semi-Exclusive Option  
8/31/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Volume (vph)	49	412	99	33	229	21	109	61	45	61	68	53
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.0			4.0			4.0			4.0	
Lane Util. Factor		1.00			1.00			1.00			1.00	
Frbp, ped/bikes		0.95			0.96			0.92			0.87	
Flpb, ped/bikes		0.97			0.99			0.87			0.94	
Frt		0.98			0.99			0.97			0.96	
Flt Protected		1.00			0.99			0.98			0.98	
Satd. Flow (prot)		1677			1744			1421			1439	
Flt Permitted		0.95			0.91			0.70			0.83	
Satd. Flow (perm)		1601			1592			1014			1212	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	53	448	108	36	249	23	118	66	49	66	74	58
RTOR Reduction (vph)	0	10	0	0	4	0	0	13	0	0	20	0
Lane Group Flow (vph)	0	599	0	0	304	0	0	220	0	0	178	0
Confl. Peds. (#/hr)	260		110	110		260	180		150	150		180
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases		2			6			4			8	
Permitted Phases	2			6			4			8		
Actuated Green, G (s)		45.5			45.5			18.5			18.5	
Effective Green, g (s)		45.5			45.5			18.5			18.5	
Actuated g/C Ratio		0.61			0.61			0.25			0.25	
Clearance Time (s)		4.0			4.0			4.0			4.0	
Lane Grp Cap (vph)		971			966			250			299	
v/s Ratio Prot												
v/s Ratio Perm		c0.37			0.19			c0.22			0.15	
v/c Ratio		0.62			0.31			0.88			0.60	
Uniform Delay, d1		9.3			7.2			27.2			25.0	
Progression Factor		0.46			1.00			1.00			1.87	
Incremental Delay, d2		1.9			0.9			33.0			8.2	
Delay (s)		6.2			8.0			60.1			54.9	
Level of Service		A			A			E			D	
Approach Delay (s)		6.2			8.0			60.1			54.9	
Approach LOS		A			A			E			D	

Intersection Summary

HCM Average Control Delay	23.1	HCM Level of Service	C
HCM Volume to Capacity ratio	0.66		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	8.0
Intersection Capacity Utilization	65.9%	ICU Level of Service	C
Analysis Period (min)	15		

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
2: Beach St. & Jones St.

Shared Lane Option

8/31/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕	↗		↕			↕			↕	
Volume (vph)	49	412	99	33	229	21	109	61	45	61	68	53
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.0	4.0		4.0			4.0			4.0	
Lane Util. Factor		1.00	1.00		1.00			1.00			1.00	
Frbp, ped/bikes		1.00	0.73		0.96			0.92			0.87	
Flpb, ped/bikes		0.97	1.00		0.99			0.87			0.94	
Frt		1.00	0.85		0.99			0.97			0.96	
Flt Protected		0.99	1.00		0.99			0.98			0.98	
Satd. Flow (prot)		1794	1152		1740			1421			1439	
Flt Permitted		0.94	1.00		0.92			0.70			0.83	
Satd. Flow (perm)		1696	1152		1612			1014			1212	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	53	448	108	36	249	23	118	66	49	66	74	58
RTOR Reduction (vph)	0	0	42	0	4	0	0	13	0	0	20	0
Lane Group Flow (vph)	0	501	66	0	304	0	0	220	0	0	178	0
Confl. Peds. (#/hr)	260		110	110		260	180		150	150		180
Turn Type	Perm		Perm	Perm			Perm			Perm		
Protected Phases		2			6			4			8	
Permitted Phases	2		2	6			4			8		
Actuated Green, G (s)		45.5	45.5		45.5			18.5			18.5	
Effective Green, g (s)		45.5	45.5		45.5			18.5			18.5	
Actuated g/C Ratio		0.61	0.61		0.61			0.25			0.25	
Clearance Time (s)		4.0	4.0		4.0			4.0			4.0	
Lane Grp Cap (vph)		1029	699		978			250			299	
v/s Ratio Prot												
v/s Ratio Perm		c0.30	0.06		0.19			c0.22			0.15	
v/c Ratio		0.49	0.09		0.31			0.88			0.60	
Uniform Delay, d1		8.2	6.2		7.2			27.2			25.0	
Progression Factor		1.18	2.70		1.00			1.00			1.79	
Incremental Delay, d2		1.2	0.2		0.8			33.0			7.2	
Delay (s)		11.0	16.8		8.0			60.1			51.9	
Level of Service		B	B		A			E			D	
Approach Delay (s)		12.0			8.0			60.1			51.9	
Approach LOS		B			A			E			D	

Intersection Summary

HCM Average Control Delay	25.3	HCM Level of Service	C
HCM Volume to Capacity ratio	0.57		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	8.0
Intersection Capacity Utilization	69.1%	ICU Level of Service	C
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis  
3: Beach St. & Hyde St.

Semi-Exclusive Option  
8/31/2010



Movement	EBT	EBR	WBL	WBT	NBR	SBL	SBT	SBR	SER
Lane Configurations	↔			↔		↔			↔
Volume (vph)	308	64	42	237	134	255	164	215	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	3.6			3.6	3.6	3.6	3.6	4.0	
Lane Util. Factor	1.00			1.00	1.00	1.00	1.00	1.00	
Frb, ped/bikes	0.90			1.00	0.79	1.00	0.70	1.00	
Flpb, ped/bikes	1.00			0.97	1.00	0.66	1.00	1.00	
Frt	0.98			1.00	0.86	1.00	0.91	0.86	
Flt Protected	1.00			0.99	1.00	0.95	1.00	1.00	
Satd. Flow (prot)	1643			1793	1277	1161	1184	1611	
Flt Permitted	1.00			0.69	1.00	0.95	1.00	1.00	
Satd. Flow (perm)	1643			1255	1277	1161	1184	1611	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	335	70	46	258	146	277	178	234	9
RTOR Reduction (vph)	11	0	0	0	71	0	0	0	0
Lane Group Flow (vph)	394	0	0	304	75	277	412	0	9
Confl. Peds. (#/hr)	300		300	340		340	250		
Turn Type	Perm			custom		Perm		custom	
Protected Phases	2			2			8		1
Permitted Phases	2			4		8		1	
Actuated Green, G (s)	16.6			16.6	29.7	29.7	29.7	0.6	
Effective Green, g (s)	16.6			16.6	29.7	29.7	29.7	0.6	
Actuated g/C Ratio	0.29			0.29	0.51	0.51	0.51	0.01	
Clearance Time (s)	3.6			3.6	3.6	3.6	3.6	4.0	
Vehicle Extension (s)	3.0			3.0	3.0	3.0	3.0	3.0	
Lane Grp Cap (vph)	469			359	653	593	605	17	
v/s Ratio Prot	0.24						c0.35	c0.01	
v/s Ratio Perm				c0.24	0.06	0.24			
v/c Ratio	0.84			0.85	0.11	0.47	0.68	0.53	
Uniform Delay, d1	19.5			19.6	7.4	9.1	10.6	28.6	
Progression Factor	1.00			1.00	1.00	1.00	1.00	1.00	
Incremental Delay, d2	16.5			21.2	0.1	0.6	3.2	26.7	
Delay (s)	36.0			40.7	7.5	9.7	13.8	55.3	
Level of Service	D			D	A	A	B	E	
Approach Delay (s)	36.0			40.7		12.2			
Approach LOS	D			D		B			
<b>Intersection Summary</b>									
HCM Average Control Delay	23.8			HCM Level of Service				C	
HCM Volume to Capacity ratio	0.74								
Actuated Cycle Length (s)	58.1			Sum of lost time (s)				11.2	
Intersection Capacity Utilization	79.5%			ICU Level of Service				D	
Analysis Period (min)	15								

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
3: Beach St. & Hyde St.

Shared Lane Option  
8/31/2010



Movement	EBT	WBL	WBT	NBR	SBL	SBT	SBR	SER
Lane Configurations	↑		↖	↗	↖	↗		↗
Volume (vph)	372	42	237	134	255	164	215	8
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	3.6		3.6	3.6	3.6	3.6		4.0
Lane Util. Factor	1.00		1.00	1.00	1.00	1.00		1.00
Frbp, ped/bikes	1.00		1.00	0.79	1.00	0.70		1.00
Flpb, ped/bikes	1.00		0.97	1.00	0.66	1.00		1.00
Frt	1.00		1.00	0.86	1.00	0.91		0.86
Flt Protected	1.00		0.99	1.00	0.95	1.00		1.00
Satd. Flow (prot)	1863		1793	1277	1161	1184		1611
Flt Permitted	1.00		0.70	1.00	0.95	1.00		1.00
Satd. Flow (perm)	1863		1259	1277	1161	1184		1611
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	404	46	258	146	277	178	234	9
RTOR Reduction (vph)	0	0	0	71	0	0	0	0
Lane Group Flow (vph)	404	0	304	75	277	412	0	9
Confl. Peds. (#/hr)		300		340	340		250	
Turn Type		Perm		custom		Perm		custom
Protected Phases	2		2			8		1
Permitted Phases		2		4		8		1
Actuated Green, G (s)	16.6		16.6	29.7	29.7	29.7		0.6
Effective Green, g (s)	16.6		16.6	29.7	29.7	29.7		0.6
Actuated g/C Ratio	0.29		0.29	0.51	0.51	0.51		0.01
Clearance Time (s)	3.6		3.6	3.6	3.6	3.6		4.0
Vehicle Extension (s)	3.0		3.0	3.0	3.0	3.0		3.0
Lane Grp Cap (vph)	532		360	653	593	605		17
v/s Ratio Prot	0.22					c0.35		c0.01
v/s Ratio Perm			c0.24	0.06	0.24			
v/c Ratio	0.76		0.84	0.11	0.47	0.68		0.53
Uniform Delay, d1	18.9		19.5	7.4	9.1	10.6		28.6
Progression Factor	1.00		1.00	1.00	1.00	1.00		1.00
Incremental Delay, d2	9.8		20.9	0.1	0.6	3.2		26.7
Delay (s)	28.7		40.4	7.5	9.7	13.8		55.3
Level of Service	C		D	A	A	B		E
Approach Delay (s)	28.7		40.4			12.2		
Approach LOS	C		D			B		
<b>Intersection Summary</b>								
HCM Average Control Delay			21.8			HCM Level of Service		C
HCM Volume to Capacity ratio			0.74					
Actuated Cycle Length (s)			58.1			Sum of lost time (s)		11.2
Intersection Capacity Utilization			77.5%			ICU Level of Service		D
Analysis Period (min)			15					

c Critical Lane Group

HCM Signalized Intersection Capacity Analysis  
4: Jefferson St. & Leavenworth St.

Semi-Exclusive Option  
8/31/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Volume (vph)	0	0	0	98	427	7	100	10	0	0	25	6
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)					3.5			3.5			3.5	
Lane Util. Factor					1.00			1.00			1.00	
Frbp, ped/bikes					0.99			1.00			0.96	
Flpb, ped/bikes					0.85			0.84			1.00	
Frt					1.00			1.00			0.97	
Flt Protected					0.99			0.96			1.00	
Satd. Flow (prot)					1553			1492			1735	
Flt Permitted					0.99			0.72			1.00	
Satd. Flow (perm)					1553			1125			1735	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	107	464	8	109	11	0	0	27	7
RTOR Reduction (vph)	0	0	0	0	1	0	0	0	0	0	6	0
Lane Group Flow (vph)	0	0	0	0	578	0	0	120	0	0	28	0
Confl. Peds. (#/hr)				870		570	80					80
Turn Type				Perm		Perm						
Protected Phases					8			2			6	
Permitted Phases				8		2						
Actuated Green, G (s)					21.5			12.5			12.5	
Effective Green, g (s)					21.5			12.5			12.5	
Actuated g/C Ratio					0.29			0.17			0.17	
Clearance Time (s)					3.5			3.5			3.5	
Lane Grp Cap (vph)					445			188			289	
v/s Ratio Prot											0.02	
v/s Ratio Perm					0.37			0.11				
v/c Ratio					1.30			0.64			0.10	
Uniform Delay, d1					26.8			29.1			26.5	
Progression Factor					1.09			1.20			1.00	
Incremental Delay, d2					147.0			11.0			0.7	
Delay (s)					176.3			46.0			27.1	
Level of Service					F			D			C	
Approach Delay (s)		0.0			176.3			46.0			27.1	
Approach LOS		A			F			D			C	

Intersection Summary

HCM Average Control Delay	148.0	HCM Level of Service	F
HCM Volume to Capacity ratio	1.06		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	41.0
Intersection Capacity Utilization	48.5%	ICU Level of Service	A
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis  
4: Jefferson St. & Leavenworth St.

Shared Lane Option  
8/31/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations					↕			↕			↕	
Volume (vph)	0	0	0	98	427	7	100	10	0	0	25	6
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)					3.5			3.5			3.5	
Lane Util. Factor					1.00			1.00			1.00	
Frbp, ped/bikes					0.99			1.00			0.96	
Flpb, ped/bikes					0.85			0.84			1.00	
Frt					1.00			1.00			0.97	
Flt Protected					0.99			0.96			1.00	
Satd. Flow (prot)					1553			1492			1735	
Flt Permitted					0.99			0.72			1.00	
Satd. Flow (perm)					1553			1125			1735	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	0	0	0	107	464	8	109	11	0	0	27	7
RTOR Reduction (vph)	0	0	0	0	1	0	0	0	0	0	6	0
Lane Group Flow (vph)	0	0	0	0	578	0	0	120	0	0	28	0
Confl. Peds. (#/hr)				870		570	80					80
Turn Type				Perm		Perm						
Protected Phases					8			2			6	
Permitted Phases				8		2						
Actuated Green, G (s)					21.5			12.5			12.5	
Effective Green, g (s)					21.5			12.5			12.5	
Actuated g/C Ratio					0.29			0.17			0.17	
Clearance Time (s)					3.5			3.5			3.5	
Lane Grp Cap (vph)					445			188			289	
v/s Ratio Prot											0.02	
v/s Ratio Perm					0.37			0.11				
v/c Ratio					1.30			0.64			0.10	
Uniform Delay, d1					26.8			29.1			26.5	
Progression Factor					1.00			1.14			1.00	
Incremental Delay, d2					148.7			9.8			0.7	
Delay (s)					175.3			42.9			27.1	
Level of Service					F			D			C	
Approach Delay (s)		0.0			175.3			42.9			27.1	
Approach LOS		A			F			D			C	

Intersection Summary			
HCM Average Control Delay	146.8	HCM Level of Service	F
HCM Volume to Capacity ratio	1.06		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	41.0
Intersection Capacity Utilization	48.5%	ICU Level of Service	A
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis  
5: Beach St. & Leavenworth St.

Semi-Exclusive Option  
8/31/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↕			↕			↕			↕	
Volume (vph)	126	377	45	88	244	58	15	83	118	69	46	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.0			4.0			4.0			4.0	
Lane Util. Factor		1.00			1.00			1.00			1.00	
Frbp, ped/bikes		0.99			0.97			0.80			0.97	
Flpb, ped/bikes		0.98			0.99			0.99			0.90	
Frt		0.99			0.98			0.93			0.99	
Flt Protected		0.99			0.99			1.00			0.97	
Satd. Flow (prot)		1757			1727			1360			1574	
Flt Permitted		0.82			0.79			0.98			0.56	
Satd. Flow (perm)		1453			1388			1332			901	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	137	410	49	96	265	63	16	90	128	75	50	13
RTOR Reduction (vph)	0	4	0	0	8	0	0	58	0	0	5	0
Lane Group Flow (vph)	0	592	0	0	416	0	0	176	0	0	133	0
Confl. Peds. (#/hr)	210		150	150		210	110		140	140		110
Turn Type	Perm			Perm			Perm			Perm		
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)		40.0			40.0			15.0			15.0	
Effective Green, g (s)		40.0			40.0			15.0			15.0	
Actuated g/C Ratio		0.53			0.53			0.20			0.20	
Clearance Time (s)		4.0			4.0			4.0			4.0	
Lane Grp Cap (vph)		775			740			266			180	
v/s Ratio Prot												
v/s Ratio Perm		c0.41			0.30			0.13			c0.15	
v/c Ratio		0.76			0.56			0.66			0.74	
Uniform Delay, d1		13.8			11.7			27.7			28.2	
Progression Factor		1.00			0.87			1.00			1.39	
Incremental Delay, d2		7.0			2.7			12.3			2.5	
Delay (s)		20.8			12.8			40.0			41.7	
Level of Service		C			B			D			D	
Approach Delay (s)		20.8			12.8			40.0			41.7	
Approach LOS		C			B			D			D	
<b>Intersection Summary</b>												
HCM Average Control Delay			23.7									HCM Level of Service C
HCM Volume to Capacity ratio			0.76									
Actuated Cycle Length (s)			75.0							20.0		
Intersection Capacity Utilization			77.3%									ICU Level of Service D
Analysis Period (min)			15									
c Critical Lane Group												

HCM Signalized Intersection Capacity Analysis  
5: Beach St. & Leavenworth St.

Shared Lane Option

8/31/2010



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	126	377	45	88	244	58	15	83	118	69	46	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.0	4.0		4.0	4.0			4.0			4.0	
Lane Util. Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Frbp, ped/bikes	1.00	0.96		1.00	0.90			0.89			0.97	
Flpb, ped/bikes	1.00	1.00		1.00	1.00			0.99			0.94	
Frt	1.00	0.98		1.00	0.97			0.93			0.99	
Flt Protected	0.95	1.00		0.95	1.00			1.00			0.97	
Satd. Flow (prot)	1770	1762		1770	1635			1508			1648	
Flt Permitted	0.95	1.00		0.95	1.00			0.98			0.56	
Satd. Flow (perm)	1770	1762		1770	1635			1476			943	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	137	410	49	96	265	63	16	90	128	75	50	13
RTOR Reduction (vph)	0	6	0	0	11	0	0	58	0	0	5	0
Lane Group Flow (vph)	137	453	0	96	317	0	0	176	0	0	133	0
Confl. Peds. (#/hr)	210		150	150		210	110		140	140		110
Turn Type	Prot			Prot			Perm		Perm		Perm	
Protected Phases	7	4		3	8			2			6	
Permitted Phases							2			6		
Actuated Green, G (s)	6.0	30.0		6.0	30.0			15.0			15.0	
Effective Green, g (s)	6.0	30.0		6.0	30.0			15.0			15.0	
Actuated g/C Ratio	0.08	0.40		0.08	0.40			0.20			0.20	
Clearance Time (s)	4.0	4.0		4.0	4.0			4.0			4.0	
Lane Grp Cap (vph)	142	705		142	654			295			189	
v/s Ratio Prot	c0.08	c0.26		0.05	0.19							
v/s Ratio Perm								0.12			c0.14	
v/c Ratio	0.96	0.64		0.68	0.48			0.60			0.70	
Uniform Delay, d1	34.4	18.2		33.6	16.7			27.3			27.9	
Progression Factor	1.00	1.00		0.78	1.26			1.00			1.16	
Incremental Delay, d2	66.7	4.5		20.2	2.2			8.7			2.0	
Delay (s)	101.1	22.6		46.5	23.3			35.9			34.5	
Level of Service	F	C		D	C			D			C	
Approach Delay (s)		40.7			28.6			35.9			34.5	
Approach LOS		D			C			D			C	

Intersection Summary

HCM Average Control Delay	35.6	HCM Level of Service	D
HCM Volume to Capacity ratio	0.70		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	24.0
Intersection Capacity Utilization	68.5%	ICU Level of Service	C
Analysis Period (min)	15		
c Critical Lane Group			

HCM Unsignalized Intersection Capacity Analysis  
6: Beach St. & Larkin St.


Semi-Exclusive Option  
8/31/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↷			↶	↷	
Sign Control	Stop			Stop	Stop	
Volume (vph)	212	78	167	291	66	169
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	230	85	182	316	72	184
Direction, Lane #	EB 1	WB 1	NB 1			
Volume Total (vph)	315	498	255			
Volume Left (vph)	0	182	72			
Volume Right (vph)	85	0	184			
Hadj (s)	-0.13	0.11	-0.34			
Departure Headway (s)	5.3	5.2	5.6			
Degree Utilization, x	0.46	0.73	0.40			
Capacity (veh/h)	649	670	582			
Control Delay (s)	12.7	20.8	12.3			
Approach Delay (s)	12.7	20.8	12.3			
Approach LOS	B	C	B			
Intersection Summary						
Delay			16.4			
HCM Level of Service			C			
Intersection Capacity Utilization			72.8%	ICU Level of Service	C	
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis  
 6: Beach St. & Larkin St.

Shared Lane Option  
 8/31/2010



Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↷		↶	↶	↷	
Sign Control	Stop			Stop	Stop	
Volume (vph)	212	78	167	291	66	169
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	230	85	182	316	72	184

Direction, Lane #	EB 1	WB 1	WB 2	NB 1
Volume Total (vph)	315	182	316	255
Volume Left (vph)	0	182	0	72
Volume Right (vph)	85	0	0	184
Hadj (s)	-0.13	0.53	0.03	-0.34
Departure Headway (s)	5.3	6.2	5.7	5.5
Degree Utilization, x	0.46	0.31	0.50	0.39
Capacity (veh/h)	651	564	617	604
Control Delay (s)	12.7	10.8	13.0	11.9
Approach Delay (s)	12.7	12.2		11.9
Approach LOS	B	B		B

Intersection Summary			
Delay		12.3	
HCM Level of Service		B	
Intersection Capacity Utilization	57.5%		ICU Level of Service B
Analysis Period (min)		15	

HCM Signalized Intersection Capacity Analysis  
7: Beach St. & Polk St.

Semi-Exclusive Option  
8/31/2010




Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↔		↔		↔	
Volume (vph)	48	37	306	46	41	252
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.0		4.0		4.0	
Lane Util. Factor	1.00		1.00		1.00	
Frb, ped/bikes	0.95		1.00		0.90	
Flpb, ped/bikes	1.00		1.00		1.00	
Frt	0.94		1.00		0.88	
Flt Protected	1.00		0.96		0.99	
Satd. Flow (prot)	1668		1785		1478	
Flt Permitted	1.00		0.96		0.99	
Satd. Flow (perm)	1668		1785		1478	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	52	40	333	50	45	274
RTOR Reduction (vph)	34	0	0	0	234	0
Lane Group Flow (vph)	58	0	0	383	85	0
Confl. Peds. (#/hr)	80		80		20	
Turn Type	Split					
Protected Phases	4	8		8	2	
Permitted Phases						
Actuated Green, G (s)	11.0		27.0		11.0	
Effective Green, g (s)	11.0		27.0		11.0	
Actuated g/C Ratio	0.15		0.36		0.15	
Clearance Time (s)	4.0		4.0		4.0	
Lane Grp Cap (vph)	245		643		217	
v/s Ratio Prot	c0.03		c0.21		c0.06	
v/s Ratio Perm						
v/c Ratio	0.24		0.60		0.39	
Uniform Delay, d1	28.3		19.6		29.0	
Progression Factor	1.00		1.00		1.00	
Incremental Delay, d2	2.3		4.0		5.3	
Delay (s)	30.5		23.6		34.2	
Level of Service	C		C		C	
Approach Delay (s)	30.5		23.6		34.2	
Approach LOS	C		C		C	

Intersection Summary			
HCM Average Control Delay	28.7	HCM Level of Service	C
HCM Volume to Capacity ratio	0.47		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	26.0
Intersection Capacity Utilization	54.6%	ICU Level of Service	A
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis  
7: Beach St. & Polk St.

Shared Lane Option  
8/31/2010




Movement	EBT	EBR	WBL	WBT	NBL	NBR
Lane Configurations	↔			↔		↔
Volume (vph)	48	37	306	46	41	252
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.0			4.0		4.0
Lane Util. Factor	1.00			1.00		1.00
Frbp, ped/bikes	0.95			1.00		0.90
Flpb, ped/bikes	1.00			1.00		1.00
Frt	0.94			1.00		0.88
Flt Protected	1.00			0.96		0.99
Satd. Flow (prot)	1668			1785		1478
Flt Permitted	1.00			0.96		0.99
Satd. Flow (perm)	1668			1785		1478
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	52	40	333	50	45	274
RTOR Reduction (vph)	34	0	0	0	234	0
Lane Group Flow (vph)	58	0	0	383	85	0
Confl. Peds. (#/hr)	80		80		20	50
Turn Type			Split			
Protected Phases	4		8	8	2	
Permitted Phases						
Actuated Green, G (s)	11.0			27.0	11.0	
Effective Green, g (s)	11.0			27.0	11.0	
Actuated g/C Ratio	0.15			0.36	0.15	
Clearance Time (s)	4.0			4.0	4.0	
Lane Grp Cap (vph)	245			643	217	
v/s Ratio Prot	c0.03			c0.21	c0.06	
v/s Ratio Perm						
v/c Ratio	0.24			0.60	0.39	
Uniform Delay, d1	28.3			19.6	29.0	
Progression Factor	1.00			1.00	1.00	
Incremental Delay, d2	2.3			4.0	5.3	
Delay (s)	30.5			23.6	34.2	
Level of Service	C			C	C	
Approach Delay (s)	30.5			23.6	34.2	
Approach LOS	C			C	C	

Intersection Summary			
HCM Average Control Delay	28.7	HCM Level of Service	C
HCM Volume to Capacity ratio	0.47		
Actuated Cycle Length (s)	75.0	Sum of lost time (s)	26.0
Intersection Capacity Utilization	54.6%	ICU Level of Service	A
Analysis Period (min)	15		
c Critical Lane Group			

HCM Unsignalized Intersection Capacity Analysis  
 8: Beach St. & Columbus


Semi-Exclusive Option  
 8/31/2010



Movement	EBT	EBR	WBL	WBT	NWL	NWR
Lane Configurations	↑	↗		↖	↖	↗
Sign Control	Stop			Stop	Stop	
Volume (vph)	472	219	46	213	66	76
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	513	238	50	232	72	83
Direction, Lane #	EB 1	EB 2	WB 1	NW 1		
Volume Total (vph)	513	238	282	154		
Volume Left (vph)	0	0	50	72		
Volume Right (vph)	0	238	0	83		
Hadj (s)	0.03	-0.67	0.07	-0.19		
Departure Headway (s)	5.3	4.6	5.3	5.8		
Degree Utilization, x	0.76	0.30	0.42	0.25		
Capacity (veh/h)	663	767	654	571		
Control Delay (s)	21.7	8.4	12.0	10.7		
Approach Delay (s)	17.5		12.0	10.7		
Approach LOS	C		B	B		
Intersection Summary						
Delay			15.3			
HCM Level of Service			C			
Intersection Capacity Utilization			56.9%		ICU Level of Service	B
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis  
8: Beach St. & Columbus

Shared Lane Option  
8/31/2010



Movement	EBT	EBR	WBL	WBT	NWL	NWR
Lane Configurations	↑	↗		↑	↖	
Sign Control	Stop			Stop	Stop	
Volume (vph)	472	283	46	213	66	76
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92
Hourly flow rate (vph)	513	308	50	232	72	83
Direction, Lane #	EB 1	EB 2	WB 1	NW 1		
Volume Total (vph)	513	308	282	154		
Volume Left (vph)	0	0	50	72		
Volume Right (vph)	0	308	0	83		
Hadj (s)	0.03	-0.67	0.07	-0.19		
Departure Headway (s)	5.3	4.6	5.3	5.9		
Degree Utilization, x	0.76	0.39	0.42	0.25		
Capacity (veh/h)	662	768	652	571		
Control Delay (s)	21.8	9.4	12.1	10.8		
Approach Delay (s)	17.1		12.1	10.8		
Approach LOS	C		B	B		
Intersection Summary						
Delay			15.2			
HCM Level of Service			C			
Intersection Capacity Utilization			56.9%	ICU Level of Service	B	
Analysis Period (min)			15			