

Field Monitoring Guide

User Capacity Management Monitoring Program

United States Department of the Interior
National Park Service
Yosemite National Park
California

2008

Yosemite National Park

National Park Service
U.S. Department of the Interior





FIELD MONITORING GUIDE
User Capacity Management Monitoring Program

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

Yosemite National Park
California

2008



TABLE OF CONTENTS

SECTION A: INTRODUCTION		1
A.1	Background	2
A.2	Indicators and Standards	3
A.3	The 2008 Field Season	12
A.4	References	14

SECTION B: MONITORING PROTOCOLS		15
B.1	Water Quality	16
B.1.1	Background	16
B.1.2	Sampling Design	16
B.1.3	Field Methods	17
B.1.4	Data Management	35
B.1.5	Personnel Requirements and Training	40
B.1.6	Operational Requirements	41
B.1.7	References	43
B.2	Riverbank Condition	44
B.2.1	Background	44
B.2.2	Sampling Design	45
B.2.3	Field Methods	46
B.2.4	Data Management	55
B.2.5	Personnel Requirements and Training	55
B.2.6	Operational Requirements	55
B.2.7	References	57
B.3	Wildlife Exposure to Human Food	59
B.3.1	Background	59
B.3.2	Sampling Design	59
B.3.3	Field Methods	61
B.3.4	Data Management	63
B.3.5	Personnel Requirements and Training	63
B.3.6	Operational Requirements	63
B.3.7	References	65
B.4	Extent and Condition of Informal Trails	66
B.4.1	Background	66
B.4.2	Sampling Design	66
B.4.3	Field Methods	67
B.4.4	Data Management	75
B.4.5	Personnel Requirements and Training	75
B.4.6	Operational Requirements	76
B.4.7	References	79
B.5	Wilderness Encounters	80
B.5.1	Background	80
B.5.2	Sampling Design	80
B.5.3	Field Methods	81
B.5.4	Data Management	83
B.5.5	Personnel Requirements and Training	83
B.5.6	Operational Requirements	83
B.5.7	References	85



B.6	Extent of Visitor Use	86
B.6.1	Background	86
B.6.2	Sampling Design	86
B.6.3	Field Methods	87
B.6.4	Data Management	91
B.6.5	Personnel Requirements and Training	91
B.6.6	Operational Requirements	91
B.6.7	References	93
B.7	Archaeology Condition and Stability	94
B.7.1	Background	94
B.7.2	Sampling Design	95
B.7.3	Field Methods	95
B.7.4	Data Management	103
B.7.5	Personnel Requirements and Training	103
B.7.6	Operational Requirements	104
B.7.7	References	105
B.8	Parking Availability	116
B.8.1	Background	116
B.8.2	Sampling Design	116
B.8.3	Field Methods	118
B.8.4	Data Management	121
B.8.5	Personnel Requirements and Training	121
B.8.6	Operational Requirements	123
B.8.7	References	123

APPENDICES		124
Appendix A	Glossary of Terms and Acronyms	124
Appendix B	List of Preparers	129



LIST OF FIGURES

Figure A.2.1 UCMMP Sites in East Valley	5
Figure A.2.2 UCMMP Sites in West Valley	6
Figure A.2.3 UCMMP Sites in El Portal	7
Figure A.2.4 UCMMP Sites in Wawona	8
Figure A.2.5 UCMMP Sites in Merced Lake Area	9
Figure A.2.6 UCMMP Sites in Tuolumne Meadows	10
Figure A.2.7 UCMMP Sites in Hetch Hetchy Reservoir	11
Figure A.3.1 UCMMP Work Plan 2008	13
Figure B.1.1 Water Quality Sampling Locations for the Merced River	17
Figure B.1.2 USGS Field Form (front)	36
Figure B.1.3 USGS Field Form (back)	37
Figure B.1.4 Instrument Calibration Form	38
Figure B.1.5 Water Quality Sampling Log	39
Figure B.1.6 Sample Site Information Form	39
Figure B.2.1 Sample Reach Setup	47
Figure B.2.2 Diagram of Cross-Sectional Survey	52
Figure B.2.3 Sample Notes of a Cross-Sectional Survey	52
Figure B.2.4 An example of a Hand Drawn Map	53
Figure B.3.1 Data Sheet – Wildlife Exposure to Human Food	62
Figure B.4.1 Informal Trails Condition Class Characteristics and Photo examples	69
Figure B.5.1 Data Sheet – Wilderness Encounters	82
Figure B.6.1 PAOT and Aggregate Counts Datasheet from the Twin Bridges-Tuolumne River	89
Figure B.6.2 Visitor Monitoring Calibration Form	90
Figure B.7.1 Yosemite Visitor Use Impact Site Monitoring Field Form	97
Figure B.8.1 Example of a Sampling Schedule for Parking Availability	117
Figure B.8.2 Parking Availability Data Sheets	119

LIST OF TABLES

Table B.1.1 Water Quality Parameter Measurement	18
Table B.1.2 Water Quality Laboratory Parameters	19
Table B.1.3 Water Quality Sampling Locations for Merced River	22
Table B.1.4 Water Quality Sample Processing Requirements	23
Table B.1.5 Job Hazard Analysis – Water Quality	42
Table B.2.1 Job Hazard Analysis – Riverbank Condition	56
Table B.3.1 Job Hazard Analysis – Wildlife Exposure to Human Food	64
Table B.4.1 Job Hazard Analysis – Extent and Condition of Social Trails	77
Table B.5.1 Job Hazard Analysis – Wilderness Encounters	84
Table B.6.1 Job Hazard Analysis – Extent of Visitor Use	92
Table B.8.1 Job Hazard Analysis – Parking Availability	102



SECTION A: INTRODUCTION



A.1 BACKGROUND

The National Park Service is charged to protect the quality of park resources while providing for their enjoyment by this and future generations. This is the essential mission outlined in the 1916 Organic Act (Public Law 16 U.S.C. 1) establishing the National Park Service and it suggests that a balance be maintained between resource protection and visitor use. Today, there are hundreds of National Park units accommodating millions of visitors each year. This poses increasing challenges for area managers trying to achieve this balance. Managers must increasingly rely on scientific data and up-to-date information as to the extent of visitor use and related impacts so that they may make informed decisions that ensure that the resources and visitor opportunities they are charged to protect remain in tact for future generations to enjoy.

The Visitor Experience and Resource Protection (VERP) framework was developed to address visitor use and related issues in National Park units. VERP is a visitor use planning and management process designed to: 1) plan for desired resource and experiential conditions; 2) establish a monitoring program to track the status of these desired conditions; and 3) implement management strategies to maintain desired conditions (NPS 1997, Hof et al. 1997). Yosemite National Park has built upon this framework to address visitor use issues in Yosemite in development of our own User Capacity Management Monitoring Program (UCMMP).

Overall, the UCMMP process helps the National Park Service to address a variety of visitor use-related issues including user capacity. The National Parks and Recreation Act of 1978 (P.L. 95-625) stipulates that National Park units “identify and implement commitments for visitor carrying capacities for all areas of the unit”. Originally, the carrying capacity concept referred to the level of use by a particular species that a particular land area could effectively accommodate. As applied to visitor use in national parks and other protected areas this concept is known as “user capacity” and refers to the types and levels of visitor use that a given protected area can accommodate before the values for which the area had been established are unacceptably affected (NPS 1997; Manning 1999; Manning et al. 2006).

Since the early 1990s, the UCMMP process has been initiated and / or implemented in several national park units across the country. In Yosemite, the UCMMP process has been applied to develop plans for the future of Yosemite Valley and the Merced River Corridor (YOSE 2000; 2001; 2004). It represents a significant effort of the park in tackling user capacity and other visitor-related issues through a systematic and adaptive management framework (NPS 1997). Currently, the park is also applying UCMMP to the Tuolumne Wild and Scenic River.

The objective of the UCMMP is to provide park managers with up-to-date, scientific data and information on visitor use and related impacts. The UCMMP is a key component of a cyclical process of adaptive visitor use management in the park. It also provides a means to inform park partners and the public as to the current status of resource and visitor use conditions.



A.2 INDICATORS AND STANDARDS

In the UCMMP process *indicators* are measurable, manageable variables that reflect the condition of park resources and the quality of visitors' experiences. *Standards* reflect the desired condition of these variables (Manning 2007). The User Capacity Management Program for the Merced Wild and Scenic River defined a suite of 8 selected indicators. (YOSE 2001; YOSE 2004). These indicators were first monitored in 2004. However, after several iterative evaluations and marked improvements this original set of indicators has evolved into the current list as follows:

INDICATOR 1: Water Quality

Visitor impacts include pollutants into the rivers are known to create resource degradation. Such constituents are monitored to identify potential changes over time.

Standards: Anti-degradation for each segment, for *E. coli*, nutrients (total dissolved nitrogen, nitrate and nitrite, total dissolved phosphorous, and total phosphorus), and total petroleum hydrocarbons. Absolute minimum for all segments: State *E. coli* standard for recreational contact. Yosemite-specific standards, which will be much more protective than available state and federal standards, will be established once sufficient data has been obtained through this sampling protocol.

INDICATOR 2: Riverbank Erosion

Use along riverbanks present vegetation trampling and erosion related impacts. Understanding this relationship is important to protecting these aquatic ecosystems.

Standards: A peer review of the existing monitoring protocol revealed the need for a more rigorous approach to riverbank condition monitoring and assessment. As a result, standards are being developed that take into account a new protocol that was under development in 2008.

INDICATOR 3: Wildlife Exposure to Human Food

Wildlife impacts are heavily caused by access to food. Understanding visitors' abilities to comply with food storage regulation has been developed as a proxy for these wildlife impacts.

Standards: 95% or greater compliance with food storage regulations in selected campgrounds and parking areas.

INDICATOR 4: Extent and Condition of Informal Trails

Informal trail monitoring has been applied to both river corridors to identify trampling related impacts to Yosemite's unique meadow habitat.

Standards Baseline was established in 2004 and 2005. In Tuolumne Meadows, 2008 mapping will add to data collected in 2005 and 2006 to increase baseline dataset. Baseline will be updated as restoration actions are implemented and data are re-collected to reflect restoration efforts.

INDICATOR 5: Number of Encounters with Other Parties in Wilderness

Monitoring Wilderness encounters focuses primarily in the Upper Merced River Corridor beyond Nevada Falls. Tuolumne River Corridor monitoring has been initiated with Wilderness staff and volunteers.

Standards: Zone Un-trailed—No more than one encounter with another party per four hour period, 80% of the time.

Zone Trailed Travel—No more than one encounter with another party per hour, 80% of the time.

INDICATOR 6: Visitor Use Monitoring

Pedestrian simulation models are being developed in 2008 to provide outputs for people-one-time (PAOT) and people-per-viewscape (PPV), commonly applied metrics used to monitor crowding and congestion in protected areas.

Standard: Methods alteration due to increased information: developing baseline for river, trail and attraction site use.



INDICATOR 7: Archeological Resource Integrity

This work explored the applicability of the National Park Service's Archeological Site Monitoring Information System (ASMIS) to monitor visitor use impacts to archeological resources.

Standard: No deterioration in site stability or condition related to visitor threats or disturbances. No new visitor related (including park management action related to visitor use) threats or disturbances to archeological sites that have the potential to degrade stability or condition. No change in condition from baseline to current as a result of visitor use.

INDICATOR 8: Parking Availability

In addition to the typical monitoring collection with parking, transportation studies were conducted throughout Yosemite Valley, entrance stations and key intersections to develop a simulation model of the transportation system in the park. The intent of this study is to outline other aspects of this system that are key to the visitor experience and measurable.

Standard: A standard for parking availability has yet to be determined.

Monitoring Requirements

Monitoring these indicator variables requires the development of protocols that allow NPS staff to collect data in order to understand current use, impact, and trends. Creating a robust and accurate measurement strategy requires a good sampling plan. Sampling is a systematic approach to collecting data. A good sample will accurately represent estimates of population values. Watson et al (2000) outlined seven components of a good sampling strategy.

- Bias in the sampling can be eliminated by randomization.
- Probability sampling can be used to measure precision sample results.
- Patterns and landscape characteristics of wilderness use usually do not allow for census measurements in a field season.
- Good sampling strategies require fewer personnel hours.
- Well designed sampling leads to higher accuracy in the data.
- Flexibility is very important to managers who are challenged to multi-task and maximize productivity with minimal personnel resources.
- Sampling should not burden visitors.



These sampling strategy components can be generalized to all indicators measured. However, as with all monitoring programs some constraints exist including time, limited budgets, or other stochastic events such as weather, medical emergencies, and unforeseen circumstances. Therefore, NPS staff should know the standard error associated with the number of days or times that an indicator is measured. Generally, the higher the sample size, the lower the standard error. For several of the indicators, the standard error can be calculated to help NPS staff be informed about such conditions. All of these components of a good sampling strategy were incorporated into development of this field guide. Sampling strategies were developed for each indicator that will be efficient yet provide the data required to address whether a standard has been exceeded.

Although all of these considerations were incorporated into the development of this field guide, it is understood that it takes time to develop monitoring protocols that truly address changes in the natural or social environment. Recent research by United States Geological Survey and National Park Service staff concluded that long-term monitoring protocols take several years of field work and revisions to develop the level of confidence in the data for long-term monitoring (Oakley, et al, 2003).

The following maps present the various sampling sites for each indicator variable monitored in 2008:

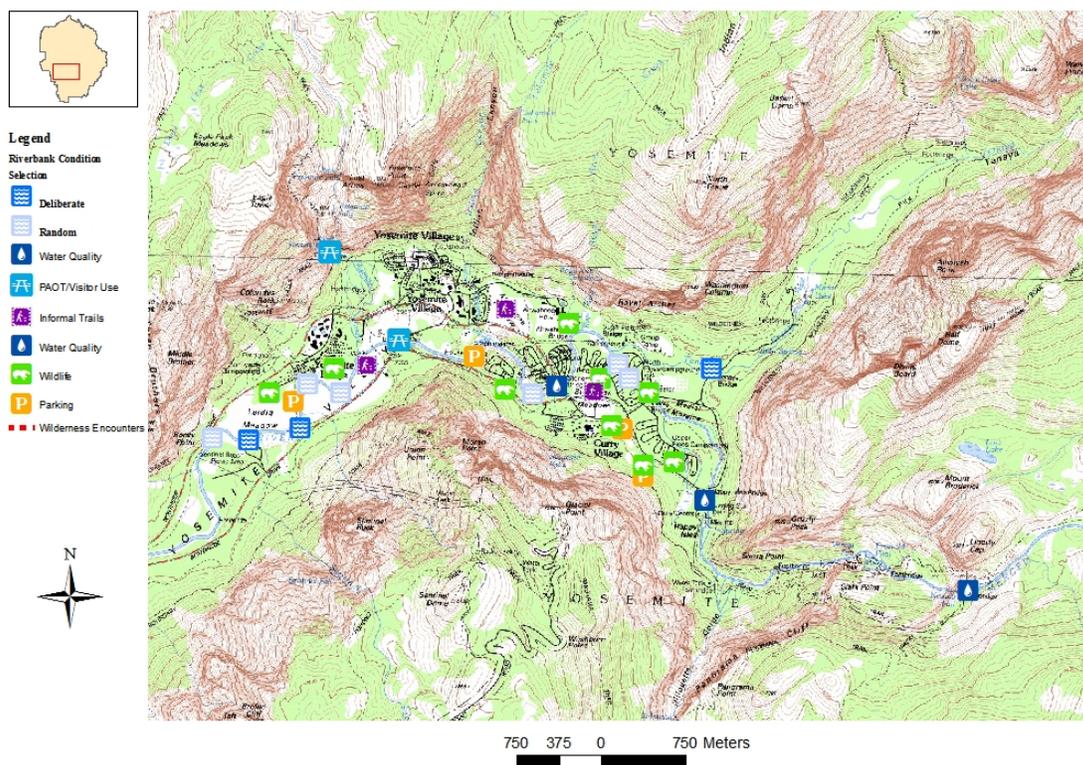


Figure A.2.1 UCMMP Monitoring Sites in East Yosemite Valley



Note: "The Cultural resource information contained herein is protected from public disclosure under 16 U.S.C. section 470w-3, of the National Historic Preservation Act of 1966, as amended, and 16 U.S.C. section 470hh, of the Archaeological Resources Protection Act of 1979."

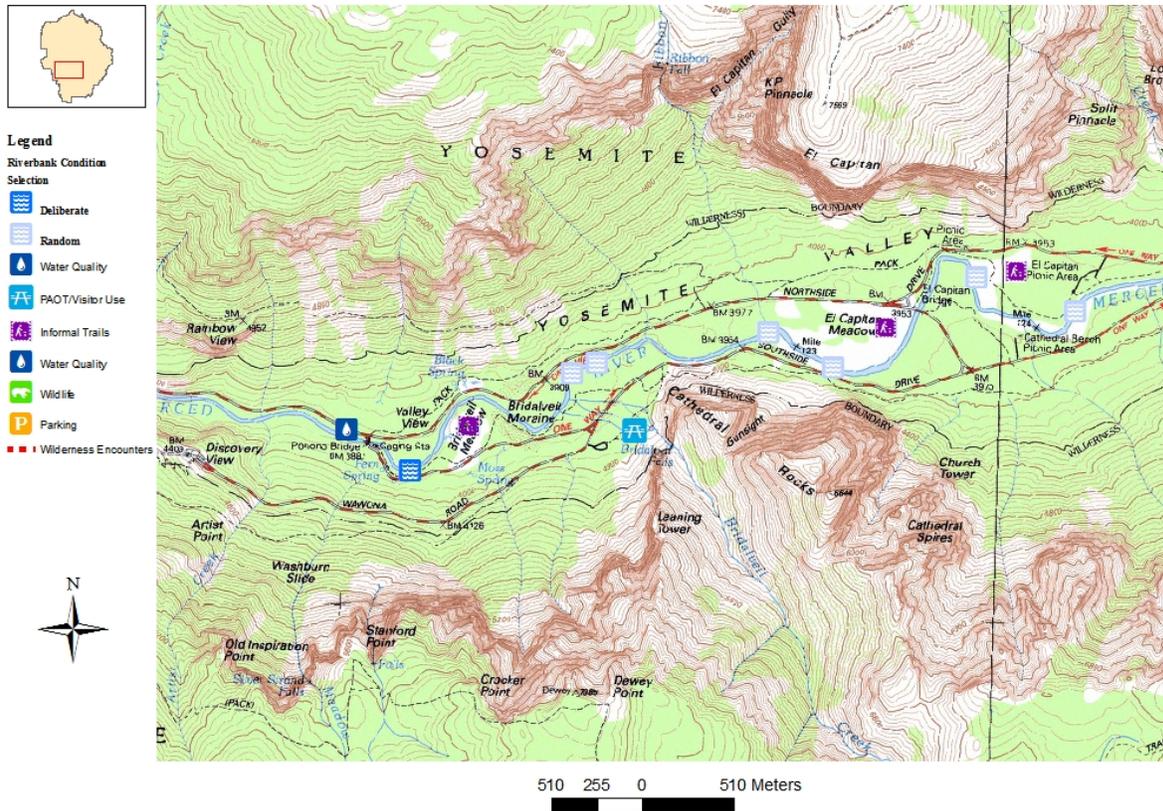


Figure A.2.2 UCMMP Monitoring Sites in West Yosemite Valley



Note: "The Cultural resource information contained herein is protected from public disclosure under 16 U.S.C. section 470w-3, of the National Historic Preservation Act of 1966, as amended, and 16 U.S.C. section 470hh, of the Archaeological Resources Protection Act of 1979."

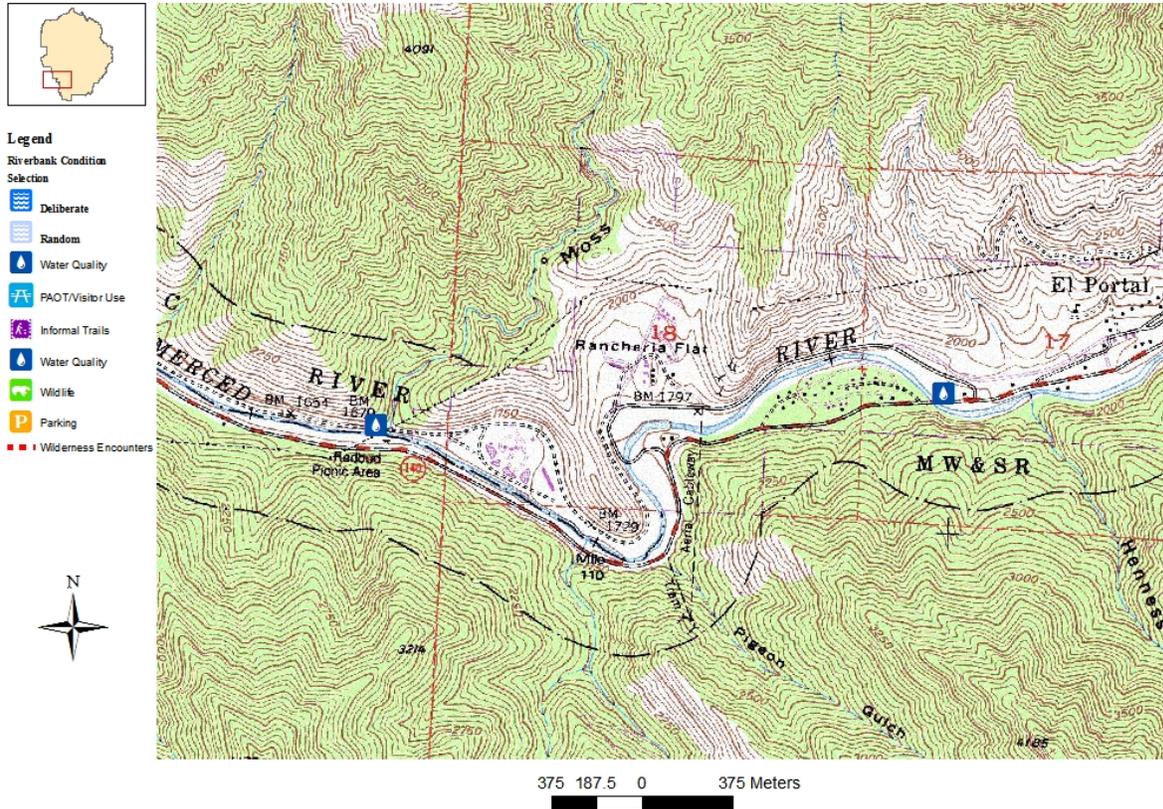


Figure A.2.3 UCMMP Monitoring Sites in El Portal



Note: "The Cultural resource information contained herein is protected from public disclosure under 16 U.S.C. section 470w-3, of the National Historic Preservation Act of 1966, as amended, and 16 U.S.C. section 470hh, of the Archaeological Resources Protection Act of 1979."

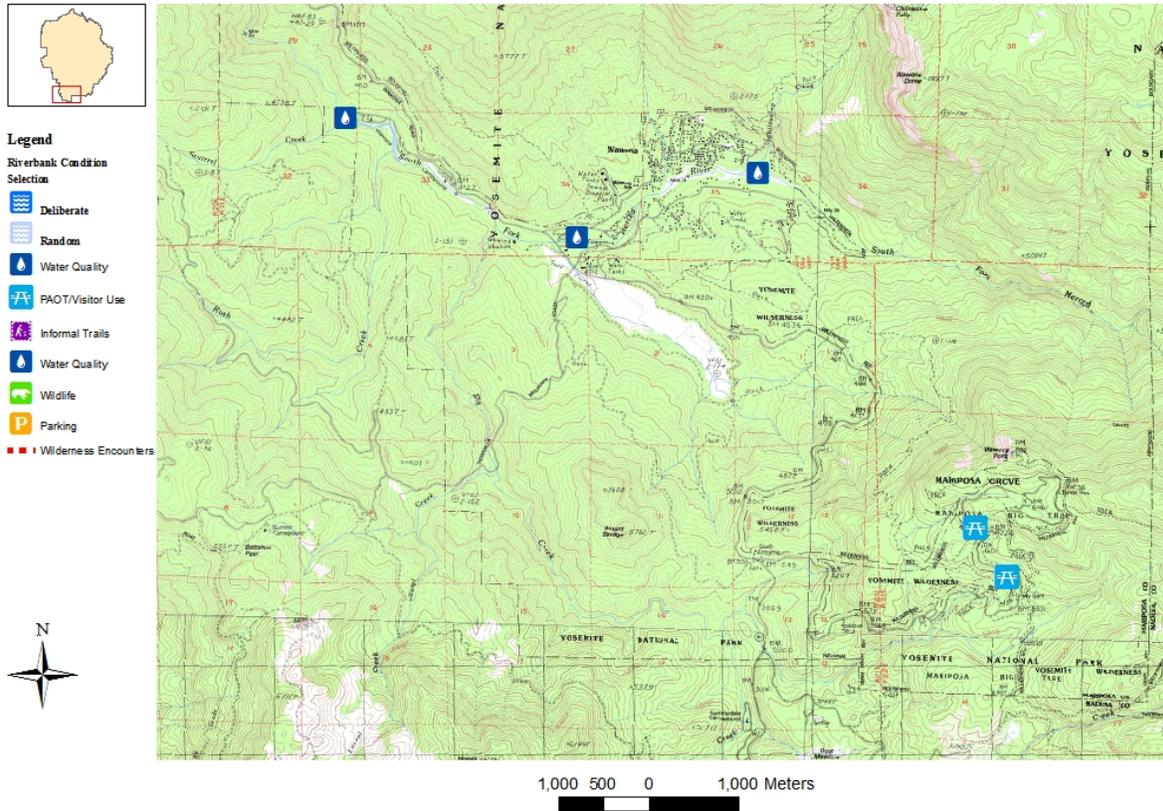


Figure A.2.4 UCMMP Monitoring Sites in Wawona



Note: "The Cultural resource information contained herein is protected from public disclosure under 16 U.S.C. section 470w-3, of the National Historic Preservation Act of 1966, as amended, and 16 U.S.C. section 470hh, of the Archaeological Resources Protection Act of 1979."



Figure A.2.5 UCMMP Monitoring Sites in the Merced Lake Area



Note: "The Cultural resource information contained herein is protected from public disclosure under 16 U.S.C. section 470w-3, of the National Historic Preservation Act of 1966, as amended, and 16 U.S.C. section 470hh, of the Archaeological Resources Protection Act of 1979."


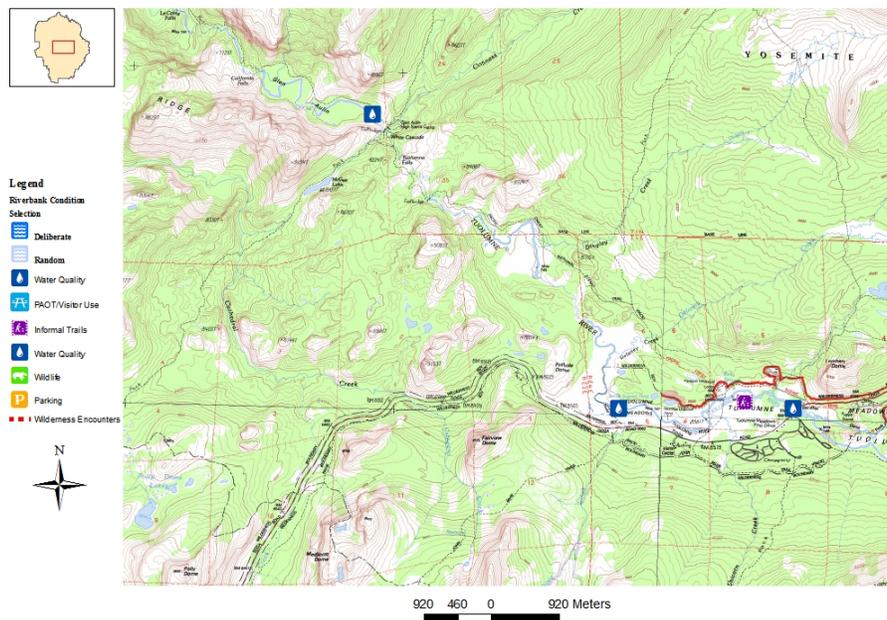


Figure A.2.6 UCMMP Sites in the Tuolumne Meadows Area

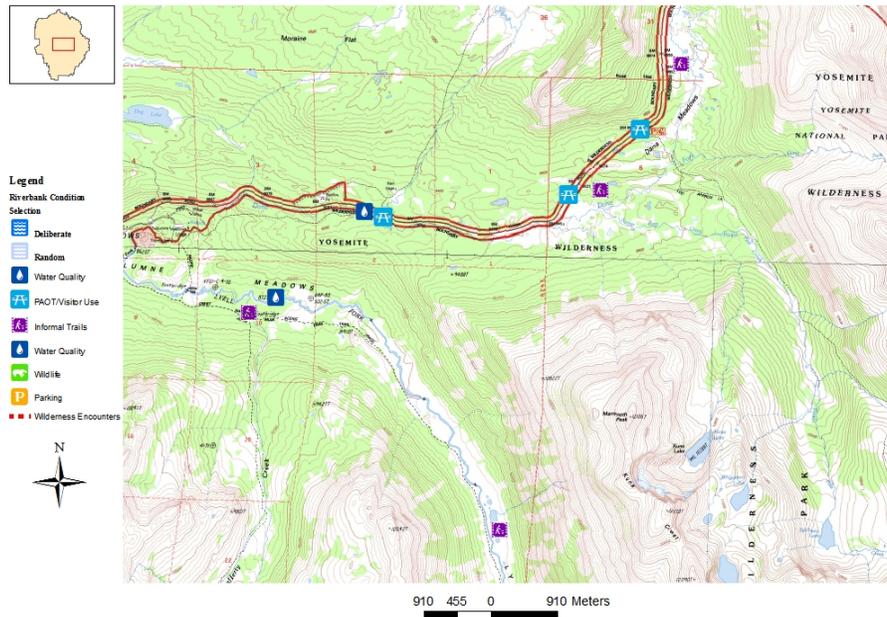

Note: "The Cultural resource information contained herein is protected from public disclosure under 16 U.S.C. section 470w-3, of the National Historic Preservation Act of 1966, as amended, and 16 U.S.C. section 470hh, of the Archaeological Resources Protection Act of 1979."

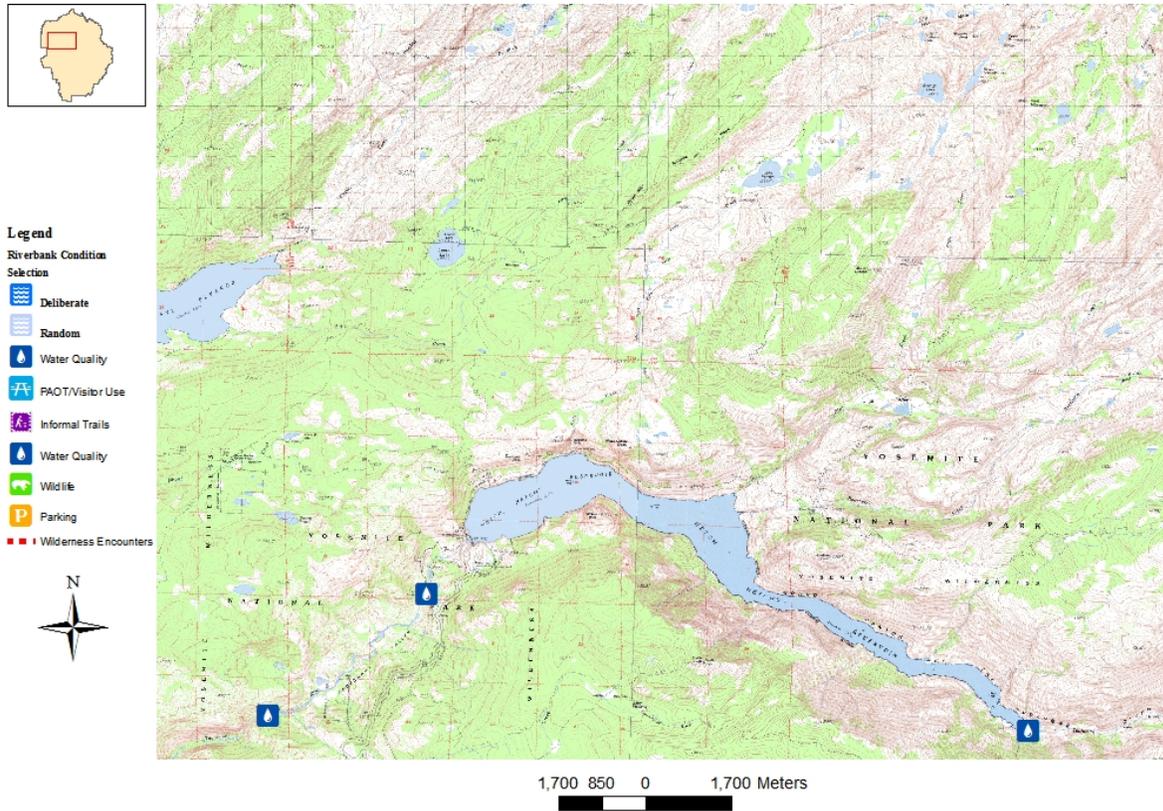


Figure A.2.7 UCMMP Monitoring Sites in the Hetch Hetchy Reservoir Area



Note: "The Cultural resource information contained herein is protected from public disclosure under 16 U.S.C. section 470w-3, of the National Historic Preservation Act of 1966, as amended, and 16 U.S.C. section 470hh, of the Archaeological Resources Protection Act of 1979."



A.3 THE 2008 FIELD SEASON

Summary: This version of the field guide was prepared for use during the 2008 season. Readers will note that improvements have been made in the protocols from earlier field seasons. In some cases we have moved from the inventorying of baseline conditions to sampling-based strategies. Still in other cases we have refined measurement techniques. Further development of these and additional indicators continue as additional information and technology expands. This process of improvement and refinement is essential to an on-going monitoring program and will continue in subsequent years.

This field guide is organized into the following sections:

Section A — Introduction. Provides background on the UCMMP and introduces the indicators monitored in 2008.

Section B — Monitoring Protocols. Describes the field monitoring protocols employed for each indicator for the 2008 season.

Appendices — The appendices section includes a glossary and a list of acronyms.

Compliance Statement: Compliance with institutional requirements and regulatory processes was completed for the 2008 UCMMP effort. National Park Service research permits were obtained to comply with institutional requirements for conducting field research and monitoring activities in a National Park unit. Two permits were obtained as follows: 1) General monitoring activities permit #YOSE-2008-SCI-0044); and 2) Water quality sampling (permit #YOSE-2008-SCI-0032). Both permits are detailed and accessible at the National Park Service Research Permit and Reporting System site at <https://science1.nature.nps.gov/research/ac/ResearchIndex>.

Additionally, the 2008 field monitoring season also included a number of activities that required the National Park Service to demonstrate compliance with the National Environmental Protection Act (NEPA). The specific types of data collected for the Tuolumne Wild and Scenic River Comprehensive Management Plan, as part of the UCMMP, included water quality sampling of the Tuolumne Wild and Scenic River and documentation of social trails in the Tuolumne Meadows area.

For example, collection of water samples from the Dana Fork of the Tuolumne Wild and Scenic River requires an identification of where those sampling locations will be, and the amount of water expected to be removed from the river for each sample. The use of Geographic Information Systems (GIS) equipment to document the location of social trails required staff traversing through sensitive habitats (i.e., places the NPS would like to see people avoid). Because of the scale and duration of these types of monitoring activities were considered to be at a negligible (i.e., non detectable) level of intrusion into the "human environment," a Categorical Exclusion (CE) was the appropriate level of NEPA compliance.

The types of activities covered under the CE received for UCMMP data collection included: (1) Non-destructive data collection by fewer than 5 people together at one time in one area; and (2) The temporary installation of small, unobtrusive data collection devices in and adjacent to the Tuolumne River and its tributaries.



Work Plan: The following work plan (Figure A.3.1) provides an overview of the activities associated with carrying out the monitoring of UCMMP indicators during the 2008 field season.

Figure A.3.1. UCMMP Field Monitoring Work Plan 2008

ID	Task	Deliverable	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
1.0	Planning and Development Phase	Field Monitoring Guide												
1.1	Monitoring protocol development													
1.2	Conduct development workshop													
1.3	Obtain data collection permits and conduct appropriate compliance													
1.4	Acquire data collection instruments													
1.5	Select and prepare sampling locations													
1.6	Field test data collection methods and instruments													
1.7	Conduct public meeting on indicator planning and development													
2.0	Implementation Phase	Data and Information												
2.1	Conduct field data collection													
2.2	Conduct quality control checks of data collection													
2.3	Enter data including quality control check													
2.4	Conduct public meeting on data collection efforts													
3.0	Reporting Phase	Annual Report												
3.1	Data analysis													
3.2	Prepare annual report													
3.3	Conduct public meeting on monitoring results													
3.4	Conduct Reporting Winter Workshop													



A.4 REFERENCES

- Hof, M. and D. Lime (1997) *Visitor Experience and Resource Protection Framework in the National Park System: Rationale, Current Status, and Future Direction*. In: McCool, S., Cole, D. (comps.) 1997. Proceedings – Limits of Acceptable Change and related planning processes: progress and future directions. May 20-22: Missoula Mt. Gen. Tech. Rep. INT-GTR-371. Ogden, UT: USDA, Forest Service, Rocky Mountain Research Station.
- Manning, R. (1999) *Studies in Outdoor Recreation*. Corvallis: Oregon State University Press.
- Manning, R., Jacobi, C., & Marion, J.L. (2006). Recreation Monitoring at Acadia National Park. *The George Wright Forum*. 23(2): 59-72.
- Manning, R. (2007) *Parks and Carrying Capacity: Commons without tragedy*. Washington D.C.: Island Press.
- National Park Service (1997) *Visitor Experience and Resource Protection (VERP) Framework: A Handbook for Planners and Managers*. CO: Denver Service Center.
- National Parks and Recreation Act (1978) *Public Law 95-625 U.S.C.*
- Oakley, K., Thomas, L. P., and Fancy, S. G. (2003). Guidelines for long-term monitoring protocols. *Wildlife Society Bulletin* 31(4): 1000-1003.
- Organic Act (1916) *Public Law 16 U.S.C. 1*
- YOSE (Yosemite National Park) (2000). *Final Yosemite Valley Plan and Supplemental Environmental Impact Statement*. USDI National Park Service, Yosemite National Park.
- YOSE (2001). *Merced Wild and Scenic River Comprehensive Management Plan*. USDI National Park Service, Yosemite National Park.
- YOSE (2004) *User Capacity Management Program for the Merced Wild and Scenic River*. US Department of the Interior, National Park Service. Yosemite, CA.
- Watson, A.E.; Cole, D.N.; Turner, D.L.; Reynolds, P.S. (2000) *Wilderness Recreation Use Estimation: A Handbook of Methods and Systems*. United States Forest Service, Rocky Mountain Research Station, General Technical Report RMRS-GTR-56, Ogden, UT 84401



SECTION B: MONITORING PROTOCOLS



B.1. Water Quality

B.1.1 Background

Purpose of the Merced River Water Quality Monitoring Protocol: Human use has the potential to affect water quality. Horse manure (at stables or on trails) or people swimming in the river can increase fecal coliform (i.e. bacteriological) levels; people bathing in the river with soap can increase phosphorus/phosphate (i.e. nutrients) levels; and surface water runoff from campgrounds and stables can affect both fecal coliform and nutrient levels. These activities, as well as hydrocarbon pollution associated with roads and other development, all may occur in Yosemite Valley.

The goal of this plan is to collect baseline water quality data along the Merced River corridor. Specific objectives are to sample backcountry sections of river downstream of heavy use areas and above and below heavy use areas in Yosemite Valley, El Portal, and Wawona. A final objective is to collect high quality data that is comparable to data collected in other parks and in the Sierra Region as a means to protect water resources from human-use impacts.

Water quality standards have been established by the State of California, in accordance with the Clean Water Act, for surface waters in the San Joaquin River Basin, which includes the Merced River. Similar standards that are much more restrictive for certain indicators such as fecal coliforms have been established for Lake Tahoe under the Clean Water Act's anti-degradation policy that mandates protection of waters with existing high quality (see Lahontan Region Basin Plan). The NPS currently monitors water quality above and below the treated water discharge points for the wastewater treatment plants in El Portal (monthly) and Wawona (weekly), to assure attainment with state standards and to carry out the requirements of the operating permits. In the event of a sewage spill or direct discharge of treated water to the river, the monitoring is more frequent (potentially daily).

Description of indicator and standard

Indicator: Water quality as measured by the following constituents: *E. coli*, nutrients (total dissolved nitrogen, nitrate and nitrite, total dissolved phosphorous, and total phosphorus), and total petroleum hydrocarbons.

Standard: Anti-degradation for each segment, for *E. coli*, nutrients (total dissolved nitrogen, nitrate and nitrite, total dissolved phosphorous, and total phosphorus), and total petroleum hydrocarbons. Absolute minimum for all segments: State *E. coli* standard for recreational contact. Yosemite-specific standards, which will be much more protective than available state and federal standards, will be established once sufficient data has been obtained through this sampling protocol.

B.1.2 Sampling Design

Rationale for sampling design: The initial sampling regime has been designed to inventory spatial and temporal water quality conditions on the Merced River with an emphasis on areas of the river adjacent to the heaviest development. Intensive sampling will take place for at least three years before standards of quality will be established. Until such time, applicable state and federal water quality standards will apply as minimum acceptable water quality standards.

Site selection (selection criteria and procedures): Sample locations are depicted in Figure B.1.1 and listed in Table 3. Sites were selected based on location, co-location with other sampling efforts, and existing water quality data. In general, locations were selected to be upstream and downstream of developed areas, in order to better isolate impacts. Ongoing water quality sampling by the U.S. Geological Survey at Happy Isles Bridge, top of Nevada Falls, and below Merced Lake make these good sites for collocation of sampling. Similarly, the waste water treatment plants in El Portal and Wawona sample regularly at the Highway 41 South Fork Bridge, the Highway 140 Bridge, and the Foresta Bridge. Finally, sample sites where sampling could take place in the middle of the channel even at high flow were more desirable for accurate sampling.

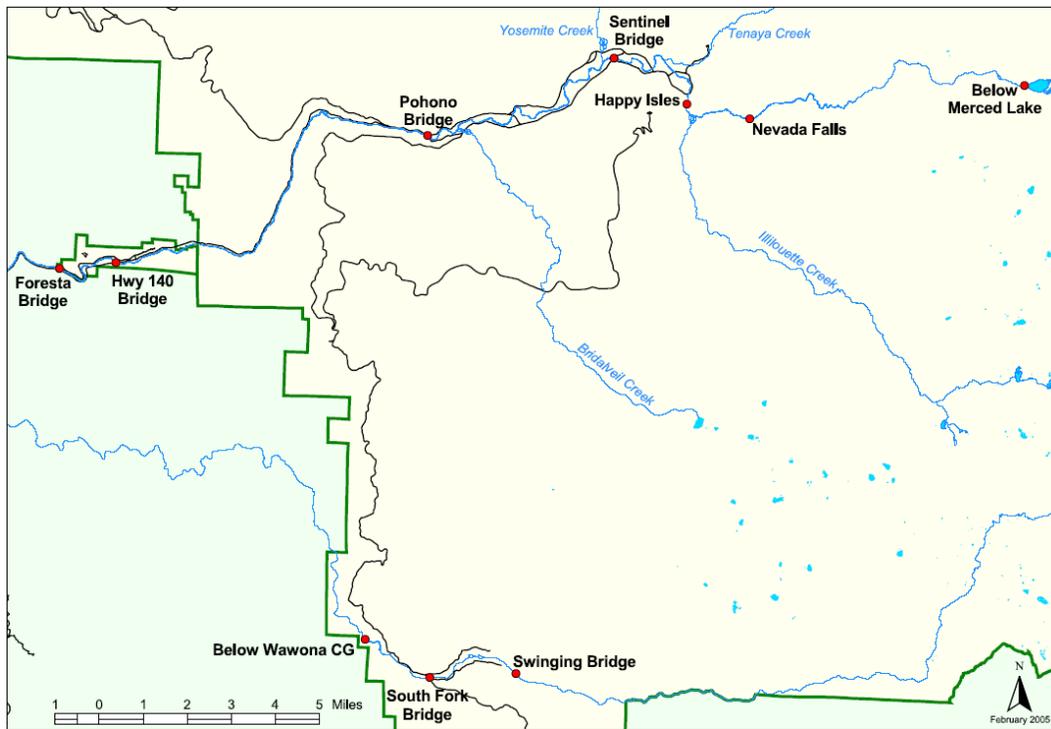


Figure B.1.1 Water Quality Sampling Locations for the Merced River

Sampling schedule: In order to understand seasonal variations in water quality, monthly sampling is conducted at all sites except the two wilderness sites (Below Merced Lake and Above Nevada Falls). The latter are sampled monthly during the summer and fall months. In addition, intense weekly sampling is conducted at five sites (Happy Isles, Pohono Bridge, Foresta Bridge, Swinging Bridge, and below Wawona Campground) during spring runoff. Finally, sampling is conducted during or following a storm event that causes a major change in flow conditions on the river. A sampling schedule and available personnel is scheduled well in advance each spring runoff season. Fixed interval sampling generally takes place on the same days each week or month, but these times can be adjusted to accommodate schedule conflicts or personnel availability. An attempt is made to sample storms during the rising limb of the hydrograph.

B.1.3 Field Methods

The field methods described in the following section assures the collection of quality data that meets the purpose of monitoring described in the previous section. The components include data quality objectives, instrument calibration procedures, sampling procedures, and quality control procedures. Special “Quick Guides” that encapsulate specific operational instructions are included in this section.

Data Quality Objectives: High data quality will be achieved through proper training of field technicians and adherence to the foregoing discussion of accuracy, precision, representativeness, and completeness.

Chemical and Physical Parameters: Accuracy describes how close the measurement is to its true value. Accuracy is the measurement of a sample of known concentration compared with a measured value. The accuracy of field measurements will be checked by performing tests on standard check solutions as a part of calibration procedures. Standard calibration and check solutions will be purchased from commercial labs. In addition, the accuracy of chemical



measurements should be verified through use of blind audit samples. Check standards and audit samples should be in the mid-range of typical values for the Merced River.

Biological Parameters: Accuracy for bacteria will be determined by analyzing a positive control sample twice annually. A positive control is similar to a standard, except that a specific discreet value is not assigned to the bacterial concentrations in the sample. This is due to the fact that bacteria are alive and capable of mortality and reproduction. Instead of a specific value, an approximate target value of the bacterial concentration is assigned to the sample by the laboratory preparing the positive control sample. In general, these checks are performed as a part of a certified laboratory routine quality control.

Chemical and Physical Parameters: The precision objectives apply to duplicate and split samples taken as part of normal sampling and repeated field parameter measurements on the same sample. Precision describes how well repeated measurements agree. Duplicate or split samples prepared in the lab or field will comprise at least 5% of the samples or one set per sampling day (about 10%). Repeated field measurements on a single sample will be conducted once per sampling day.

Biological Parameters: Precision for bacterial parameters will be determined by having the same analyst complete the procedure for laboratory duplicates of the same sample. At a minimum this should be done once per day, or run duplicates on a minimum of 5% of the samples if there are over 20 samples run per day. The results of the duplicates should be within the confidence limits supplied by the manufacturer.

Comparability: Comparability is the degree to which data can be compared directly to similar studies. Sample collection methods and field parameter measurements outlined in this protocol are derived from the USGS National Field Manual and the Surface Water Ambient Monitoring Program of the California State Water Resources Control Board. Laboratory analyses will be conducted by the USGS National Water Quality Laboratory or similar USGS approved contact laboratory or, at minimum, a National Environmental Laboratory Accreditation Program (NELAP) approved laboratory. These measures should ensure broad data comparability, particularly with the National Park Service Inventory and Monitoring and Vital Signs Programs (National Park Service- Freshwater Workgroup Subcommittee 2002).

Method Detection Limit and Sensitivity: The Method Detection Limit (MDL) is the lowest possible concentration the instrument or equipment can detect. This is important to record because we can never determine that a pollutant was not present, only that we could not detect it. Sensitivity is the ability of the instrument to detect one concentration from the next. Detection Limits and Sensitivities are noted in Tables B.1.1 and B.1.2. Some labs use reporting limits in addition to the method detection limits. A reporting limit is typically 2-5 times the MDL.

Table B.1.1. Water Quality Parameter Measurement

Parameter	Method/ Range	Units	Detection Limit	Sensitivity	Precision	Accuracy	Complete- ness
Temp.	Electronic thermometer (-5 to 50)	°C	-5	0.01 °C	± 0.01 °C	± 0.15 °C	80%
Dissolved Oxygen	Electronic meter/probe	mg/l	0.1	0.01 mg/l	± 0.01 mg/l	± 0.2 mg/l	80%
pH	pH meter	pH units	0	0.01 unit	+ 0.01 units	+ 0.2 units	80%
Conductivity	Conductivity meter	µS/cm	1	1 µS/cm	± 0.5%	± 5%	80%



Table B.1.2. Water Quality Laboratory Parameters

Parameter	Method	Units	Detection Limit	Reporting Limit	Completeness
Total Dissolved Nitrogen	USGS/NWQL 2754	mg/l	0.015	0.03	80%
Nitrate and Nitrite	USGS/NWQL 1979	mg/l	0.008	0.016	80%
Total Phosphorous	USGS/NWQL 2333	mg/l	0.002	0.004	80%
Total Dissolved Phosphorous	USGS/NWQL 2331	mg/l	0.002	0.004	80%
<i>E. coli</i>	SM9221F	MPN/100 ml	2	2	80%
Total Petroleum Hydrocarbons	306 MEPA SW 846	µg/l	13.0		80%

Representativeness: Representativeness describes how relevant the data are to the actual environmental condition. Problems can occur if:

- Samples are taken in a non-standard collection area such as downstream of a bridge
- Samples are not representative of the entire flow due to sampling in a backwater area, or not properly assuring an integrated sample
- Samples are not analyzed or processed appropriately; causing conditions in the sample to change (e.g. water chemistry measurements are not taken immediately).

Sampling locations have been selected to minimize local impacts due to a bridge or other adjacent structure. Foresta Bridge is the only location where samples are collected downstream of the bridge both for safety reasons and to sample at the same location as El Portal Waste Water treatment plant personnel. Integrated sampling has been done when possible from bridges or by wading using a centroid sample. Otherwise, grab samples are collected as close to the main flow as possible to minimized backwater effects. Side-by-side comparison of grab sampling and centroid sampling or equal-width interval sampling has been and continues to be conducted to characterize the variability associated with grab sampling alone. All field parameter measurements are conducted at the sampling sites. All samples are to be held at 4°C and analyzed within the specified hold times.

Completeness: Completeness reflects the ratio of valid laboratory results to number of samples actually sampled. The goal is 80% sample validity. This ratio may be increased as this program matures.

Before modifying these methods, or developing alternative or additional methods, technical advisors will evaluate and review the effects of the potential modification. It will be important to address their concerns about data quality before proceeding with the monitoring program.

Instrument Calibration Procedures: Instrument calibration and checks should be conducted at least twice per day, including a check of the calibration following collection of the last sample. Calibration checks are intended to verify the calibration of the instrument. The following table specifies post calibration check error limits. If the instrument does not read within these limits, perform the calibration sequence again.



Post Calibration Check Error Limits:

Parameter	Value
Dissolved oxygen	± 0.5 mg/L, ± 6% saturation
pH	± 0.2 standard units
Specific conductance	± 5%
Temperature	± 0.2 °C, annual calibration check

Instruments to calibrate will be the multi-parameter probe for measuring temperature, pH, specific conductivity, and dissolved oxygen and the smaller packable unit for temperature and conductivity. Calibration procedures will vary by instrument but the following provides a general outline of the procedure and a form to record calibration results.

Temperature: Conductivity, pH, and dissolved oxygen are all temperature compensated qualities and therefore it is critical that temperature be measured accurately. Temperature accuracy should be verified periodically via a side-by-side comparison with a NIST-traceable thermometer every three months during regular field measurements and then document in the notes section on the calibration form.

Both the multi-parameter probe and the NIST-traceable thermometer should be sent to the manufacturer once per year to verify or adjust calibration. All calibration certificates should be filed with field data for the period that the calibration was valid.

Specific Conductivity: Calibration should be performed once per sampling day. The calibration should be checked after the last sample has been collected to ensure the instrument has maintained its calibration.

- If the probe has been in storage, soaking in deionized (DI) water may be necessary to ensure the probe is thoroughly wetted prior to use. Equilibrating the probe in DI water for 10 minutes is recommended. Consider immersing the probe in DI water in a clean durable container before heading to the field.
- To calibrate the meter for specific conductivity, use a conductivity standard solution of around 1000 $\mu\text{S}/\text{cm}$. A single point calibration will be adequate.
- Immerse the probe into the standard and agitate vertically to ensure no air bubbles trapped. Allow time for the reading to stabilize.
- Record the value of the calibration standard, the manufacturer and lot number, and the expiration date.
- Triple rinse the probe with DI water and then with the check solution. This solution should be another conductivity standard around 750 $\mu\text{S}/\text{cm}$.
- Record the manufacturer's value for the check solution, the solution temperature, the manufacturer and lot number, and the expiration date.
- Immerse the probe in the check solution and record the measured value. This is the Initial Calibration Check (ICC).
- Record Continuing Calibration Checks (CCC) at the end of the day and record this value and the time. The difference should be less than 5%.



pH: Calibrate the pH meter before the start of sampling. In addition, the meter accuracy should be verified using a check standard close in value to the river water. A final check of the instrument should be done after the last sample is taken.

- Triple rinse electrode with DI water.
- Calibrate and operate in temperature-compensation mode using pH = 4.00 and 7.00 buffer solutions. Record the value of each buffer standard, the manufacturer and lot number, and the expiration date.
- Rinse the probe with DI water and blot the excess.
- Check using a buffered check solution of pH 5-6. Immerse the electrode into the solution and stir briefly.
- Record the manufacturer's value, the measured value (ICC or CCC), temperature, the manufacturer and lot number, and expiration date.
- Rinse the probe with DI water, blot dry, and make field measurement.

Dissolved Oxygen: Clean the sonde and stirrer under running tap water to remove debris. Swab the DO membrane and pH probe with a cotton ball soaked in Alconox or methanol. This removes surface films that may cause the calibration to drift. Check the condition of the membrane. Ensure the membrane is intact; free of wrinkles, bubbles, and surface films; and not discolored below the membrane.

- Fill the calibration cup with water to just below the O-ring, securing the DO membrane.
- Carefully remove any water droplets from the membrane with a Kimwipe or soft towel.
- Cap the calibration cup and allow it to stabilize for about five minutes.
- Select Calibrate, (%) Saturation, and then enter the correct barometric pressure (mm-Hg) and hit Enter.

Data Collection, Measurement, and Post-collection Processing:

Table 3 lists sampling locations and analytes to be sampled. Eight front-country (accessible by vehicle) sites will be sampled monthly. Five of these eight sites will be sampled following major storm events and weekly during the peak spring runoff period. An additional two backcountry sites will be sampled seasonally on a monthly basis. Each sampling event will take place over 1-2 days. Sample collection at two backcountry sites will require one technician two days per event. Sampling should also be coordinated with more comprehensive sampling conducted at Happy Isles by the USGS as part of the Hydrologic Benchmark program to provide a quality control check.

Nutrients (dissolved nitrogen species, total phosphorous and total dissolved phosphorous) will be sampled at all sites. Petroleum hydrocarbons will be sampled quarterly at three downstream locations only (Pohono Bridge, Foresta Bridge, and Below Wawona Campground). Additional petroleum hydrocarbon sampling will take place on a monthly basis during spring runoff sampling. *Escherichia coli* (*E. coli*) bacteria will only be sampled at the eight front-country sites due to the short 6-hour hold time on these samples. All sampling and sample hold times will conform to published USGS and EPA procedures. Storm and spring runoff sampling will be conducted at five sites only, to facilitate delivery and processing of samples at the El Portal Waste Water Treatment Plant. Storm event sampling should take place for each precipitation event that causes a doubling of discharge at the USGS Happy Isles Gage. In the case where a storm follows an extended dry period, one may wish to collect a sample prior to the point at which the discharge has doubled. During large storm events that last many days, two sample sets should be collected as the discharge increases.

At each sampling location, field measurements will also be recorded. These include water and air temperature, pH, specific conductivity, and dissolved oxygen. River stage or discharge will also be



recorded where feasible. Nutrients will be sampled at the flow centroid when and where possible. Otherwise, a grab sample taken from the bank where the thalweg is accessible will suffice.

Table B.1.3. Water Quality Sampling Locations for Merced River

Sampling Location [Latitude, Longitude, Elevation, (NAD27 Datum)]	Sampling Schedule
Merced River at Merced Lake, below High Sierra Camp 37° 44' 17" 119° 25' 07" 7,200 ft	Monthly between June 15 and October 15
Merced River at top of Nevada Fall (below Little Yosemite Valley) 37° 43' 29" 119° 31' 55" 5,920 ft	Monthly between June 15 and October 15
Merced River in Yosemite Valley at Happy Isles Gaging Station 37° 43' 54" 119° 33' 28" 4,016 ft	Monthly, weekly during snowmelt runoff, and during rainfall-generated high flows (e.g. summer thunderstorms)
Merced River in Yosemite Valley at Sentinel Bridge 37° 44' 36" 119° 35' 20" 3,950 ft	Monthly
Merced River in Yosemite Valley at Pohono Bridge 37° 43' 01" 119° 39' 55" 3,862 ft	Monthly, weekly during snowmelt runoff, and during rainfall-generated high flows (e.g. summer thunderstorms)
Merced River in El Portal at SR140 Bridge 37° 40' 17" 119° 47' 33" 1,825 ft	Monthly
Merced River in El Portal at Foresta Bridge 37° 40' 10" 119° 48' 58" 1,640 ft	Monthly, weekly during snowmelt runoff, and during rainfall-generated high flows (e.g. summer thunderstorms)
South Fork Merced River in Wawona at Swinging Bridge 37° 32' 19" 119° 37' 11" 4,180 ft	Monthly, weekly during snowmelt runoff, and during rainfall-generated high flows (e.g. summer thunderstorms)
South Fork Merced River in Wawona at South Fork Bridge 37° 32' 19" 119° 39' 28" 3,950 ft	Monthly
South Fork Merced River in Wawona below Wawona campground 37° 33' 02" 119° 37' 11" 3,860 ft	Monthly, weekly during snowmelt runoff, and during rainfall-generated high flows (e.g. summer thunderstorms)

Hydrocarbons and *E. coli* will be sampled as grab samples due to sampling requirements. Field replicates and blanks will be prepared according the requirements for each analyte.

Field staff will properly store and ship water samples within 24 hours or as soon as possible such that the samples remain below 4°C until analysis takes place. All field forms, calibration forms, and chain of custody forms will be photocopied and stored according to protocol. All equipment problems should be documented and addressed immediately.

What follows is a detailed description of monthly sampling. Event sampling is much smaller in scope due to time restrictions. At the end of this section are two Quick Guides to sampling: 1) monthly and 2) event. Once the more detailed information is learned, one can simply take the quick guide to the field as a reference.

Before Going to the Field:

- Confirm with the El Portal Waste Water Treatment Plant laboratory that they will be expecting to receive samples that day. Ideally, all sampling trips should be scheduled at least one month ahead of time.



- Calibrate and check pH, conductivity, and dissolved oxygen (DO) meters according to the calibration methods discussed above. Record this data on the Calibration/Check form and place in binder. Calibrating the conductivity and pH meters once per sample day is sufficient. The DO meters should be calibrated and checked at each sample site. This procedure will be reviewed as sampling progresses to assure proper meter calibration.
- Gather bottle sets, gloves, collection device, meters, forms, cooler, and blue ice. Use at least one blue ice block per sample set to assure the samples remain at or below 4°C.

Sampling Technique Overview: For each site, there should be a designated sampling location. The sample should be representative of the whole river at this location so collect the sample from water moving downstream, possibly in a location where the thalweg impacts the river's edge. Time constraints dictate the collection of a centroid sample (depth-integrated) where possible and a grab sample in other locations. When possible, dual sets of samples (centroid or Equal-Width Interval and grab) should be collected to assess their relative differences.

In general, collect the samples before making field measurements to avoid contamination of the site. Also, when possible, collect samples starting at the most downstream location and working upstream to avoid contamination due to sampling activities. Wear a new set of gloves at each site. Sample upstream of bridges to avoid contamination from the bridge. (Except in the case of Foresta Bridge, where grab samples are more safely collected below the bridge.) For each grab sample, open the bottle and plunge beneath the water surface about 1.0 feet and move the mouth upstream until the container is nearly full. If wading, collect the sample upstream of you. If water depth is less than 1.5 feet deep immerse the sample bottle one third of the depth. Cap the bottle and label properly. Once the samples have been collected, place the pH, conductivity, temperature, and DO probes (or multi-probe) in the water to equilibrate. Take field readings. In order to expedite *E. coli* sample transport to the laboratory and to minimize the potential for contamination, sample processing (acidification, filtration, documentation) should be delayed until back in the laboratory.

Sample Processing Requirements: Table B.1.4

Bottle Number	Analyte(s)	Collection Method	Container	Preservation
1	Dissolved Nitrogen and Phosphorous Species	Grab	125 ml brown plastic (FCC)	Filter within 2-3 hours using 0.45 µm filter; chill to 4°C. Hold time = Ship as soon as possible
2	Total Phosphorous	Grab	125 ml clear plastic (WCA)	Acidify with 1 ml 4.5 N H ₂ SO ₄ ; chill to 4°C Hold time = 28 days
3	<i>E. coli</i>	Grab	Container provided by lab	Chill to 4°C Hold time = 6 hours
4	Total Petroleum Hydrocarbons	Grab	Baked borosilicate glass 1000ml	Chill to 4°C Hold time = Ship as soon as possible



Specific Tasks for Each Sample Site:

- A. Collect *E. coli* sample
- B. Collect dissolved nitrogen sample
- C. Collect total phosphorous sample
- D. Collect total petroleum hydrocarbon sample (at Pohono, Foresta, and below Wawona Campground only) on a quarterly basis. See operational plan.
- E. Collect quality control sample(s)
- F. Collect field measurements

A. *E. coli* Sampling Protocol (USGS National Field Manual for the Collection of Water-Quality Data (NFM), Chapter 7). Never pre-rinse the sample container. When submerging the sample container, take care to avoid contamination by surface scums. The surface film is enriched with particles and bacteria not representative of the water mass. *E. coli* samples will always be collected as grab samples.

1. Establish a consistent sampling location at each site, preferably where there is a consistent downriver current and enough depth to avoid collecting any sediment.
2. For each sample set, wear a new pair of exam (latex, nitrile, vinyl or similar) gloves.
3. Open the sample container and collect a sample from the surface, moving the bottle forward upstream until full. Always hold the mouth of the sample container upstream of the sampler and any disturbed sediments. Avoid contact with the sediment.
4. Place sample immediately in cooler. Fill out sample form.

B. Nutrient Sample - Total Dissolved Nitrogen Sampling Protocol (NFM, Chapter 5.2.1.A):

1. Collect a grab sample at a location where the thalweg impacts the bank.
 2. For each sample set, wear a new pair of gloves.
 3. Collect sample in a 1-liter Nalgene bottle that had been rinsed 3 times with deionized (not distilled) water. Rinse the bottle 3 times with river water before collecting the sample.
 4. Filter the sample using a 0.45 μm filter. Note that filtering may take place in the field or back in the laboratory. Keep samples cold and in the dark.
 5. Place samples immediately in cooler. Fill out sample form.
- (Note that the nitrogen and the phosphorous samples may be derived from the same 1-liter sample)*

C. Nutrient Sample - Total Phosphorous Sampling Protocol (NFM, Chapter 5.2.1.A):

1. Collect a grab sample at a location where the thalweg impacts the bank.
 2. For each sample set, wear a new pair of gloves.
 3. Collect sample in a 1-liter Nalgene bottle that had been rinsed 3 times with deionized (not distilled) water. Rinse the bottle 3 times with river water before collecting the sample.
 4. Acidify the sample per directions from the laboratory.
 5. Place sample immediately in cooler. Fill out sample form.
- (Note that the nitrogen and the phosphorous samples may be derived from the same 1-liter sample)*



D. Hydrocarbon/Petroleum Sampling Protocol (NFM, Chapter 5.4.2):

1. Sample at the same location as the *E. coli* sample. This sample will always be collected as a grab sample.
2. For each sample set, wear a new pair of gloves.
3. Open the sample bottle not touching the opening. Do not pre-rinse bottle. Plunge the bottle into the river fully below the surface facing the opening upstream. Move the bottle slowly forward under the surface until nearly full. Leave a small amount of head space.
4. Place sample immediately in cooler. Fill out sample form.

E. Quality Control Samples:

Field Replicate (Collect one replicate per sampling trip).

1. Collect two separate nutrient samples at one location. Rotate sites at which a replicate is collected.
2. Filter or acidify as appropriate.

Field Equipment Blank (Collect one blank per trip).

1. Rinse a 1-L sample bottle with DI water 3 times. Fill with DI water. This is the 'blank' nutrient sample. Transport bottle as you would other samples in the cooler.
2. Once back at the laboratory, filter and acidify as if the sample were being processed for nitrogen and phosphorous species.

F. Field Measurements:

Measure temperature (air and water), specific conductivity, pH, and dissolved oxygen (DO). In addition make an estimate of the discharge (NFM Chapter 6). Record all calibration information on calibration forms and place in notebook.

Temperature:

- Measure the temperature at 5-10 cm beneath the water surface, approximately the same location where the samples were collected.
- Report the value to the nearest 0.2 °C.

Specific Conductivity:

- Immerse probe into the water at approximately the same location as where the samples were taken.
- Once it has stabilized, record the specific (temperature compensated) conductivity values to nearest tenth $\mu\text{S}/\text{cm}$.

pH:

- Immerse probe into the water at approximately the same location as where the samples were taken. Agitate the probe continuously.
- Once it has stabilized, record value to the nearest tenth of a pH unit.



Dissolved Oxygen:

- Calibrate the probe at each sample location.
- Immerse probe into the water at approximately the same location as where the samples were taken. Agitate the probe continuously.
- Once it has stabilized record value to the nearest 0.1 mg/L.

Discharge Estimate:

- At Happy Isles and Pohono Bridge use the USGS gaged flows. Note the time of your site visit and find the discharge later via the USGS web-sites: Happy Isles: http://nwis.waterdata.usgs.gov/nwis/uv/?site_no=11264500&agency_cd=USGS and Pohono Bridge: [http://nwis.waterdata.usgs.gov/nwis/uv/?site_no=11266500 & agency_cd=USGS](http://nwis.waterdata.usgs.gov/nwis/uv/?site_no=11266500&agency_cd=USGS)
- At Foresta Bridge, use the wire-weight gage to determine stage. Use the stage-discharge table for this site to determine discharge.
- At Sentinel Bridge, record the stage. No stage-discharge relation yet exists for this gage.
- For the Wawona sites, record the stage on the staff gage across from the golf course. Determine the discharge using the stage-discharge table for this site.



QUICK GUIDE TO UCMMP WATER QUALITY SAMPLING (MONTHLY SAMPLING)

Before Field Day:

- 1) Charge MiniSonde Controller (turn on to assure charging; leave power on)
- 2) Print and copy on waterproof paper: field forms (12).and calibration forms (3). Make sure you have a chain of custody form (1) and Sampling Log (1). All forms are at MS01/EP Commons/VERP/Field Activities Commons/Water Quality/Forms. Note that some field forms have a back side with reference codes.
- 3) Assure you have 12 NWQL bottle sets (2 FCC, 1 WCA each), 3 1-L amber bottles, and at least 8 *E. coli* sample bottles. One bottle set is for Merced Lake.
- 4) Fill 5-gal DI bottle at El Portal Waste Water Treatment Plant (call El Portal Waste Water Treatment Plant @ 379-1828).
- 5) Verify with Jim Allen (379-1039) that the waste water treatment plant is prepared to receive and process samples.
- 6) Fill a 1-L bottle with DI water for calibrating the DO when in the field.
- 7) Assure adequate supply of all calibration and check solutions standards.

Day 1—Main Stem Merced (First Tuesday of the Month):

Before going into field:

- 1) One person needs to go to Nevada Fall. This person should take the calibrated handheld conductivity meter and a clean 1-L Nalgene bottle to collect the sample. Record the specific conductivity, water temperature, and time of collection. Process back at lab.
- 2) Assemble 5 *E. coli* sample bottles, 2 TPH brown glass bottles. Prepare cooler with blue ice in which to store 6 1-L bottles each in a zip-lock bag. You may want to prelabel these bottles for each site. One will be a replicate.
- 3) Clipboard with field forms, chain of custody form, calibration forms, and sample log form.
- 4) Calibrate multiprobe in laboratory. Calibrate pH (pH 7 and 4, check at pH 5.00), and conductivity (1000 uS/cm and check at 750 uS/cm). **Record all information on calibration form.**
- 5) Pack large monthly sample bin, DI Water, Hydrolab with cord and controller.

In the field:

- 1) Calibrate DO. Record on calibration form.
- 2) Collect grab sample for nutrient analysis. Cap sample bottle, label, and store for processing later. Collect one *E. coli* sample. Collect one TPH sample at specified sites on a quarterly basis. **Record TPH samples on TDI Chain of Custody Form.**
- 3) Measure pH, water and air temperatures, DO (mg/l), and conductivity at each site. **Fill out field form.**
- 4) Collect samples indicated in the following table. Following collection of the samples deliver *E. coli* samples to the El Portal Waste Water Treatment Plant.

Site	NWQL Sample	Total Pet Sample	<i>E. coli</i> Sample	Measure Stage
Happy Isles	1	0	1	Online or in field.
Sentinel Bridge	1	0	1	Use gage on bridge.
Pohono Bridge	1	1 (per quarter)	1	Online or in field.
SR140 Bridge	1	0	1	Use same value as Foresta.
Foresta Bridge	1	1 (per quarter)	1	Wire weight gage on bridge.



Site	NWQL Sample	Total Pet Sample	<i>E. coli</i> Sample	Measure Stage
Replicate (any site)	1	0		

- 5) **Fill out the Sampling Log Form as you go.**
- 6) Back at the lab, process NWQL Samples. Filter the sample for the 2 FCC bottles (125 ml brown bottle). Acidify an unfiltered sample in the WCA (125 ml clear bottle). Rinse bottles three times before filling. Label and chill immediately. **Change filters between samples. On the Field form check the UCMMP (Schedule 2027) and the alkalinity, pH, and SC analyses.**
- 7) Process the replicate sample as above.
- 8) Process one blank sample (use DI water for 2 FCC and 1 WCA).
- 9) Check the multimeter pH probe using pH 5.00 solution. Check conductivity probe using 750 uS/cm solution. **Record these values and solution temperature on the Calibration Form.**
- 10) Rinse multimeter. Place a small amount of *tap water* in the calibration cup for storage. Unplug cord and cap conductors for protection.
- 11) Make copies of all field forms and calibration forms. Verify that each sample bag has the proper field form. Include calibration forms in a separate plastic bag.
- 12) Store all equipment properly. Rinse all filtering equipment and bottles and allow to air dry before storage.

Day 2—South Fork Merced (First Wednesday of the Month):

Before going to the field:

- 1) Assemble 3 NWQL bottle sets, 3 *E. coli* sample bottles, 1 TPH brown glass bottle. Place all in cooler with ample blue ice.
- 2) Clipboard with field forms, chain of custody form, calibration forms, and sample log form.
- 3) Calibrate the Hydrolab in laboratory. Calibrate pH (pH 7 and 4, check at pH 5.00), and conductivity (1000 uS/cm and check at 750 uS/cm). **Record all information on calibration form.**
- 4) Pack large monthly sampling bin, DH-81, binoculars, DI water, Hydrolab with cord and controller.

In the field:

- 1) Calibrate DO. Record on calibration form.
- 2) Measure pH, water and air temperatures, DO (mg/l), and conductivity at each site.
- 3) Collect grab sample for nutrient analysis about 100 yards downstream of campground at outlet of large pool. Cap sample bottle, label, and store for processing later. Collect one *E. coli* sample. Collect one TPH sample at specified sites on a quarterly basis (no rinsing). **Record TPH samples on TDI Chain of Custody Form.** Read stage on river near golf course. **Fill out field form.**



- 4) Collect remaining samples as follows:

Site	NWQL Sample	Total Pet Sample	<i>E. coli</i> Sample	Measure Stage
Below Wawona Campground	1	1 (per quarter)	1	Same as below.
South Fork Bridge	1	0	1	Gage in river near golf course (use binoculars).
Swinging Bridge	1	0	1	Same as above.

- 5) **Fill out the Sampling Log Form as you go.**
- 6) Deliver *E. coli* samples to the El Portal Waste Water Treatment Plant.
- 7) Process NWQL samples back in the laboratory. Filter the sample for the two FCC bottles (125 ml brown bottle). Acidify an unfiltered sample in the WCA (125 ml clear bottle). Rinse bottles three times before filling. Label and chill immediately. **Change filters between samples. On the Field form check the UCMMP (Schedule 2008) and the alkalinity, pH, and SC analyses.**
- 8) Ship NWQL samples as soon as possible using overnight FedEx to Dave Clow (forms are in lab). Use plenty of blue ice. Ship TPH samples as soon as possible using overnight FedEx to Dr. Thomas McDonald at TDI Brooks.



QUICK GUIDE TO UCMMP WATER QUALITY SAMPLING (EVENT OR SNOWMELT RUNOFF SAMPLING)

- 1) Weekday: Call the El Portal Waste Water Treatment Plant 379-1828 to tell them you are coming with 5 *E. coli* samples. Tell them approximately what time you will arrive.

Weekend: Do not collect *E. coli* samples.

- 2) Gather bottles sets, forms, two coolers, and blue ice:
 - a. 7 WCA (clear 125 ml bottles + acid)
 - b. 7 FCC (brown 125 ml bottles)
 - c. 5 *E. coli* sample bottles
 - d. 3 amber glass bottles (total petroleum hydrocarbons) + 1 spare in case one is broken
 - e. Forms: 1 chain of custody TDI form, 1 sample log form, 1 calibration form, 7 field forms (all on waterproof paper)
- 3) Collect field items:
 - a. Big black Tuff box: orange vests, towels, lifejacket, grab sample bottles (1-liter) with labels (6), ziplock bags, *E. coli* sample bottles, gloves, conductivity meter
 - b. One cooler and blue ice for samples
 - c. Clipboard – all forms, example forms, calibration instructions
 - d. Binoculars – for the Wawona staff gage by the golf course
- 4) Calibrate meter – use simple Oakton meter for specific conductivity and temperature only. Calibrate with 1000 uS/cm solution or equivalent and check using 750 uS/cm solution or equivalent.
- 5) Sample sequence:
 - a. Swinging Bridge— *E. coli*, FCC, and WCA (collect 2 1-L bottles of river water, 1 sample and 1 replicate)
 - b. Wawona Campground— *E. coli*, TPH, FCC, and WCA
 - c. Happy Isles Bridge— *E. coli*, FCC, and WCA
 - d. Pohono Bridge— *E. coli*, TPH, FCC, and WCA
 - e. Foresta Bridge— *E. coli*, TPH, FCC, and WCA

[*E. coli* = Sample bottle for *E. coli*, TPH = Total Petroleum Hydrocarbon (1L bottle), FCC = Filtered Chilled (125 ml brown), and WCA = Whole water acidified (125 ml clear)]

For spring runoff sampling, see sampling schedule for which days to sample TPH. It is no longer sampled every week.

- 6) At each site:
 - a. Note stage (**try to collect sample at location in main current where it is safe to do so**)
 - b. Collect *E. coli* sample - (no rinsing!)
 - c. Collect TPH using 1-L amber bottle— (no rinsing!)
 - d. Collect one liter of water in plastic bottle for FCC and WCA (rinse 3 times)
 - e. Label bottles with date, time, and sample location
 - f. Measure temperature, conductivity
 - g. Finish field form(s)
 - g. Store samples in cooler



Immediately following collection of last sample at Foresta Bridge, take *E. coli* samples to the El Portal Waste Water Treatment Plant.

- 7) Back at the lab:
 - a. Filter samples for FCC bottles
 - b. Acidify sample for WCA bottles
 - c. Label all bottles with site name, number, date, time
 - d. Finish field form
 - e. Process replicate sample as others, label as such, and fill out separate field form, place sample in separate bag
 - f. Process field equipment blank as others, label as such, and fill out separate field form, place sample in separate bag
 - g. Copy field forms
 - h. Place original waterproof field forms with their respective samples
 - i. Check calibration of the meter using 750 uS/cm solution or equivalent
 - j. Copy calibration form. Place a copy with the samples (in a separate bag). Mail with samples sent to Dave Clow at the USGS.
 - k. Complete sample log form
 - l. Refrigerate samples
 - m. Place all copies of forms in the UCMMP Drawer at the Rancheria Office.
- 8) Mail nutrient samples to Dave Clow and total petroleum hydrocarbons to Dr. Thomas McDonald as soon as possible. Send in a cooler with plenty of blue ice. If after 12:00 p.m. on Thursday, mail the following Monday so samples don't sit over the weekend.

Quality Control:

Quality control (QC) of field measurements and sample integrity are outlined in this section. In general, at least one set of QC samples and one set of duplicate field measurements should be taken per sampling trip (one per the eight front-country sites and two back-country sites). In addition, one field blank should be processed per sampling trip.

Sample Replicates (Once per Sampling Trip): For nutrients (nitrogen species and total phosphorous) collect sample replicates at one site per sampling event. Process both samples as normal, labeling one as the replicate sample.

For the *E. coli* sample, a replicate will be prepared in the laboratory. This should be the same sample location as the replicate sample for the other analysis. Standard laboratory positive and negative tests should be reported for each sample batch.

For the total petroleum hydrocarbon sample, the laboratory conducting the analysis will perform quality assurance.

Field Equipment Blanks (One per Trip): Process one sample set using DI water in exactly the same way as a normal river water sample. Rinse a 1 L bottle with DI water three times. Fill with DI water. Fill the total phosphorous bottle from this "sample" bottle. Acidify the sample and store as normal. Filter the "sample" water into a dissolved nitrogen species bottle following normal filtration protocols. Store and label as normal.



Repeated Field Measurements (Once per Trip): Repeat field measurements of temperature, pH, conductivity, and dissolved oxygen once per sampling trip. If taking measurements from a bridge, take the first set of readings as normal. Remove sensors from the water and rinse thoroughly with DI water and return to the same location as the first set of readings. Record these readings in the space provided on the field form.

External Audit Samples: None scheduled at this time.

Equipment Maintenance: The following is a schedule and procedural guide to maintenance of water monitoring field equipment.

Daily (After Sampling):

Buffers and Standards Solutions:

- Store buffers and standards solutions according to manufacturer's directions. Some solutions may have to be refrigerated when not in use.
- Check the expiration dates and order new solutions well in advance. Do not use expired solutions.

Sample Bottles and Collection Devices:

- Rinse all sampling devices (bottles, caps, nozzles, filtering systems, and tubing) with DI water after each sampling day. **Do not use soap.** Store in clean zip-lock bags or a clean dust-free container.
- Inspect sampling bottles regularly for scratches or other damage. Do not use bottles that are excessively scratched as these may be difficult to clean.
- Inspect the sampling ports of the DH-81 and DH-95 devices for scratches or damage. Order replacement parts if necessary.

Annually (January or February):

Buffers, Standards Solutions, and Other Chemicals:

- Order sufficient buffer and standards solutions for the coming year. This includes pH 4.00, 7.00, check solution and conductivity standard and check solutions.
- Order sufficient acid and methanol.

Sample Bottles and Collection Devices:

- Inspect sampling bottles regularly for scratches or other damage. Do not use bottles that are excessively scratched as these may be difficult to clean.
- Order new sample bottles if necessary.
- Inspect the sampling ports of the DH-81 and DH-95 devices for scratches or damage. Order replacement parts if necessary.

Hydrolab MiniSonde 4a: Follow this schedule for minimum maintenance. This schedule has been developed from the record of instrument performance and consultation with the manufacturer.



After Each Sampling Trip: These are important steps in preventive maintenance that are done each day the instrument is used.

- Post-calibrate the instrument before general cleaning and maintenance.
- Following post-calibration, rinse off the sensors and store them in tap water. Do not use deionized or distilled water for storage.
- Keep the water-tight rubber cable connectors well lubricated and dry on the inside. The best procedure is to store the instrument with all connectors separated and open to the air until dry.
- Check rubber cable connectors regularly to ensure that the mated surfaces are covered with a thin film of white silicone.
- As necessary, use some tissue paper to remove old traces of silicone and dirt and then reapply the silicone.

Before Calibrating: Clean off the sensors. Use a cotton pad and methanol. Cotton swabs or gauze pads are the only materials that will not scratch the soft glass of the pH probes. Paper, including lens paper, is not suitable.

Conductivity: Every two months or once every 15 field trips clean the conductivity sensor with a Q-tip soaked with methanol.

pH: Every two months or once every 15 field trips:

- Wipe the pH probe with a Q-tip soaked in methanol.
- Replace the solution in the pH reference sleeve with a standard electrolyte (3.5 molar KCl saturated with silver chloride).
- Clean the plastic reference probe sleeve and fitted end piece inside and out with a Q-tip soaked in methanol.
- Rinse everything with deionized water before filling and reassembling.
- Always apply a thin layer of silicone to the O-rings.
- When replacing the sleeve, point the sensor down and push the sleeve up until it just covers the O-ring, then point the sensor up and continue to push the sleeve all the way to the base of the probe. This will purge air out of the sleeve and force electrolyte through the Teflon junction.
- Inspect the reference sleeve for air bubbles by observing the sensor while inverting the Sonde. If bubbles are present, repeat the filling procedure.
- Place the instrument sensor upright and fill the reference sleeve with solution until overflowing. As the Teflon junction is screwed in place observe electrolytes coming through.

Every 12 Months:

- Replace Teflon junctions on pH reference sleeve.
- Store spare junctions in a 2 to 5 molar (> 50,000 $\mu\text{mhos/cm}$) KCl solution.
- Inspect the O-ring at the bottom of the Teflon junction and at the base of the reference sleeve. Replace them if they appear flattened or have small nicks or cuts.

pH Trouble Shooting: If pH still doesn't calibrate correctly, do the following:



Evaluate the condition of the Teflon junction on the terminal end of the pH reference sleeve. The sleeve should slide on easily with some force applied. If the sleeve is difficult to apply, then the junction may have become clogged. In contrast, if the sleeve slides on too easily with little resistance, the junction is too porous. In both instances the junction must be replaced.

If replacing the junction does not solve pH problems, then clean the probe by alternately soaking it in 0.1 N HCl (hydrochloric acid), and then in 0.1 N NaOH (sodium hydroxide) five minutes in each solution. Use the small black caps that protect display unit terminals to isolate the probes for soaking with these solutions.

Safety Note: Wear safety glasses and gloves when working with the corrosive chemicals.

Batteries: Every two months or once every 15 field trips:

- Review the calibration and replacement schedule for batteries.
- Recharge the 6-volt NiCad Gelcell batteries (nickel-cadmium or nickel-metal hydride) for 12 to 24 hours, regardless of the voltage displayed by the instrument. Ensure that NiCad batteries are recycled or disposed of properly. They should not be put in the regular trash.

Stirrer: Every two months or once every 15 field trips:

- Remove the magnetic metal wheel from the stirrer post.
- Thoroughly clean all lubricant, dirt, and debris from the inside of the wheel and stirrer post with a paper towel and Q-tip.
- Reapply a very small amount of white silicone lubricant to the tip of the stirrer post.

Dissolved Oxygen: Every six months or once every 15 field trips:

- Change the DO membrane and add fresh KCl solution.
- Invert the Sonde on a ring stand.
- Remove the guard, the O-ring, and the membrane. Shake out old electrolyte.
- Rinse DO cavity twice with deionized water and twice with DO electrolyte.
- Fill the cell with DO electrolyte and gently tap the side to release any trapped air bubbles.
- Replace the membrane and secure with the O-ring.
- Inspect the membrane for wrinkles or trapped air bubbles.

Whenever there is anything but a rapid and stable oxygen calibration, replace the membrane as a first step in troubleshooting. The new Teflon membrane is stretched during the replacement procedure. This affects the rate of diffusion for oxygen through the membrane to the internal sensing components. As the membrane relaxes, the rate of diffusion changes in an unpredictable manner. It is preferable to allow the membrane to relax overnight before calibrating. A minimum of 30 minutes must be allowed before the initial calibration.

If the gold cathode ring is discolored or tarnished, polish lightly with a lint free cloth or pencil eraser.



If the white ceramic post in the DO sensor is discolored (ages from white to gray to black):

- Clean with a 1:1 solution of household ammonia and deionized water.
- Remove the membrane from the sensor and pour out the electrolyte.
- Rinse with deionized water. Invert the Sonde on a ring stand and with a small eye dropper fill the cell with the ammonia solution until the white ceramic post is covered. Be careful not to get the solution on the gold anode ring. Have a moist towel close by when conducting this procedure so that the solution can be quickly wiped from the gold ring.
- Let stand for 10 minutes.
- Rinse twice with deionized water and refill according to the standard procedure described above.
- If it is necessary to use the DO probe before the new membrane has 12 hours to relax, carefully recalibrate the dissolved oxygen immediately before each set of measurements.
- **Sonde:** Every 12 months: Replace desiccant inside the display and Sonde units.

B.1.4 Data Management

Each sampling trip will generate field forms, calibrations forms, and chain-of-custody forms. In addition, there will be laboratory analysis of results. All information must be stored in a convenient and secure manner.

Sample Site Files: Each sample site will have its own folder that will contain site metadata and all field forms. Field forms will likely be required to accompany the samples to the laboratory. Therefore, make copies of each before sending samples.

File the following items in the sample site file:

- Copy of field form
- Copy of the instrument calibration form that corresponds to field measurements taken at that location
- Copy of the corresponding chain-of-custody file(s)
- Copy of laboratory analysis results.

These files should be stored in a secure fireproof location.

Instrument Calibration Notebook: All instrument calibration sheets should be stored in a 3-ring binder that is stored in the lab.

Instruments Maintenance Notebook: All notes regarding instrument maintenance should be stored in a 3-ring binder and kept in the lab. This binder should be organized by instrument. Notes to be included are battery changes, maintenance performed in-house, and any manufacturer servicing of the devices.

Forms:

- 1)USGS Field Form (Figures B.1.2 and B.1.3)
- 2)Instrument Calibration Form (Figure B.1.4)
- 3)Water Quality Sampling Log (Figure B.1.5)
- 4)Sample Site Information Form (Figure B.1.6)



Figure B.1.3 USGS Field Form (back)

<u>Sample Type</u>	<u>Description</u>	<u>Site Info</u>	<u>Site Name</u>
		<u>Site Code</u>	
S	Streamwater		
	Springwater (eg., talus springs)	HB259	Merced River below Merced Lake
R	Groundwater (eg., wells)	HB201	Merced River above Nevada Fall
G		HB204	Merced River above Happy Isles Bridge
B	Bulk precipitation	NP182	Merced River above Sentinel Bridge
W	Wet-only precipitation	HB317	Merced River above Pohono Bridge
P	Snowpack	NP183	Merced River above SR140 Bridge
O	Lake Outflow	NP184	Merced River above Foresta Bridge
E	Lake Epilimnion	NP185	S. Fork Merced River above Swinging Bridge
H	Lake Hypolimnion	NP186	S. Fork Merced River above South Fork Bridge
F	Field Blank	NP187	S. Fork Merced River below Wawona Campground
K	Lab Blank		

<u>Sample Method</u>	<u>Description</u>
M	Grab
E	EWI
A	Autosampler
R	Replicate
B	Blank
W	Weir
G	Gage
C	Composite
30	Centroid

- Sampler Type**
(surface water samples)
 1L or 2L bottle
 DH81
 Autosampler
- (precipitation samples)**
 Carboy
 Funnel
 Aerochem
 Shovel/scoop



Figure B.1.4 Instrument Calibration Form

Date: _____
Analysts: _____

Instrument (circle one):

Hydrolab MiniSonde 4a serial# 040900071937

Oakton Con400 serial# 161539

Other: _____

pH

Time _____
1st Level Calibration: **pH 7.0** @ _____ °C; Mfr/Lot# _____ Exp. Date _____

2nd Level Calibration: **pH 4.0** @ _____ °C; Mfr/Lot# _____ Exp. Date _____

Calibration Check: (true value) **pH 5.0**; Mfr/Lot# _____ Exp. Date _____

Initial Calibration Check (measured): pH _____ @ _____ °C
Diff <0.2 units? Cal. accepted by (initials/date/time): _____

Continuing Calibration Check (measured): pH _____ @ _____ °C
Diff <0.2 units? Cal. accepted by (initials/date/time): _____

Conductivity

Time _____
1st Level Calibration: **991 µS/cm** @ _____ °C; Mfr/Lot# _____ Exp. Date _____

Calibration Check: (true value) **717 µS/cm**; Mfr/Lot# _____ Exp. Date _____

Initial Calibration Check (measured): _____ µS/cm @ _____ °C
Diff <5%? Cal. accepted by (initials/date/time): _____

Continuing Calibration Check (measured): _____ µS/cm @ _____ °C
Diff <5%? Cal. accepted by (initials/date/time): _____

Dissolved Oxygen

Calibrations at each site:

Time _____ Barometric Pressure _____ (mm Hg) Temperature _____ °C

Time _____ Barometric Pressure _____ (mm Hg) Temperature _____ °C

Time _____ Barometric Pressure _____ (mm Hg) Temperature _____ °C

Time _____ Barometric Pressure _____ (mm Hg) Temperature _____ °C

Time _____ Barometric Pressure _____ (mm Hg) Temperature _____ °C

Notes:



Figure B.1.5 Water Quality Sampling Log

Site Name	Site Code	Date	Time	Samples Collected (Number)			
				FCC	WCA	1-L TPH	Fecal Coliform
Merced River Above Happy Isles Gaging Station	HB204						
Merced River Above Sentinel Bridge	NP182						
Merced River Above Pohono Bridge	HB317						
Merced River Above SR140 Bridge	NP183						
Merced River Foresta Bridge	NP184						
S. Fork Merced River Above Swinging Bridge	NP185						
S. Fork Merced River Above SR41 Bridge	NP186						
S. Fork Merced River Below Wawona C.G.	NP187						

FCC - Filtered, Chilled, Integrated
 WCA - Unfiltered, Acidified, Integrated
 1-L TPH - Amber Glass Bottle, Acidified, Total Petroleum Hydrocarbons, Grab Sample
 Fecal Coliform - 100ml Whirl Pak, Grab Sample

Figure B.1.6 Sample Site Information Form

Site Name: _____
 Date: _____
 Site Location: UTM _____ E _____ N Datum NAD27 NAD83
 Lat/Long _____ N _____ W
 Site Elevation: _____ meters feet
 USGS Site Number: _____
 Other Relevant Site Numbers _____
 Site Description: _____
 Sketch Map: _____



Data entry: As soon as is feasible, a record of the sampling event should be recorded in the UCMMP water quality database. Enter one new record for each sample location as well as one record for the duplicate sample and one record for the field blank. Once laboratory data becomes available, this too should be entered into these records.

Data analysis: Data analysis consists of first checking data against all hard copy field forms and laboratory results. Once this is complete, data should be censored to exclude duplicates, blanks, and values below detection limits. For each site, prepare a summary plot of all concentrations of each analyte (total dissolved nitrogen, nitrate plus nitrite, total dissolved phosphorous, total phosphorous, E. coli, and total petroleum hydrocarbon) or report in the form of a table. Summary statistics (mean, standard deviation, maximum, and minimum) should be prepared for field parameters such as water temperature, specific conductivity, pH, and dissolved oxygen. This summary data will be reported as a part of the UCMMP Annual Report. In the annual report, notable findings should be mentioned as well as any exceedances of existing water quality standards.

B.1.5 Personnel Requirements and Training

Roles and Responsibilities (tasks and time commitments): Yosemite National Park, through the Division of Resource Management and Science will be responsible for the administration of this monitoring plan. Management of this project will be conducted by the branch chief of Physical Sciences and GIS within the division of Resources Management and Science. Responsibilities are:

- Preparation of an annual implementation plan and budget
- Training of field personnel
- Purchase and maintenance of field equipment
- Review of data and procedures
- Maintenance of data, field forms, equipment repair and maintenance logs, and updating protocols

Preparation of an Annual Implementation Plan and Budget: The annual plan should include a sampling schedule, the laboratory(s) used, anticipated personnel needs and time. There should be a comprehensive list of equipment, repair or calibration needs, and a list of disposables such as calibration and check solutions. A budget should be included. If possible, there should also be a summary of the previous season's problems and possible solutions. This plan provides a record of data gathering activities.

As each new or returning technician enters on duty, they should receive comprehensive training on field and office water sampling procedures. The project manager should document this training for each technician for each season.

The project manager or a designated technician should be responsible for ordering new equipment and consumables, repairing or calibrating existing equipment (beyond routine actions), maintaining a supply of fresh buffers and calibration solutions, and maintaining a log of all equipment repairs.

Every two months, the project manager should review the laboratory data and the QC sample data in particular. This information, coupled with discussions with field staff, should be used to review or modify procedures to improve data quality.

All field data forms should be photocopied and stored as office copies or archive copies. Office copies are photocopies of the originals and are intended as an operational reference. Original data forms, chain-of-custody forms, and calibration forms should be stored as archives in a fire-safe location.

Each instrument should have a logbook to document calibrations, repairs, and factory calibrations. As sampling protocols are modified, former protocols should be archived with the dates that they were in effect.



Training procedures: Each technician collecting water samples and field data associated with this project must have demonstrated the following:

- The ability to calibrate and operate conductivity, pH, and dissolved oxygen (DO) meters.
- Proper sample collection, preservation, and handling.
- A safety conscious approach to field work around rivers.
- Knowledge of proper documentation procedures.

These skills may be verified through assisting a qualified technician or by a means deemed satisfactory to the branch chief for Physical Sciences and GIS. This training should be documented at least once a year for each technician.

B.1.6 Operational Requirements

Work plan: Monthly sampling will be conducted on the first Tuesday and Wednesday of the month except December and February. Event samples should be collected as soon as is feasible. Spring runoff samples are to be collected weekly for a period of 8-10 weeks following that start of spring runoff.

Safety: A job hazard analysis (JHA) has been completed. See job hazard analysis table below (Table B.1.5).



Table B.1.5 Job Hazard Analysis for Water Quality Data Collection

United States Department of Interior NATIONAL PARK SERVICE	1. WORK PROJECT/ACTIVITY	2. LOCATION	
	UCMMP Water Quality Sampling	Main Stem and South Fork Merced River	
Job Hazard Analysis (JHA)	3. NAME OF ANALYST	4. JOB TITLE	5. DATE PREPARED
	Laura Clor	Technician	April, 2005
6. TASKS/PROCEDURES	7. HAZARDS	8. ABATEMENTS ACTIONS ENGINEERING CONTROLS – SUBSTITUTION – ADMINISTRATIVE CONTROLS – PPE	
a. Driving to, from, and around sampling sites.	a. Collision resulting in damage, injury, or death.	a. Drive defensively, obey traffic laws, lights on, seatbelt on, be alert for pedestrians, wildlife, and distracted drivers. Know procedures for installing snow chains. Always carry and know how to use a Park radio.	
b. Using bridge board and leaning out over bridge railings to lower/retrieve sampler.	b. Back injury due to lifting heavy DH-95 sampler, falling from bridges into water, injury due to loss of control of bridge board as heavy sampler drops from bridge into a suspended position.	b. Use proper lifting techniques to prevent back strain, employ a second person to aid in lifting or to serve as a spotter for the lifter, a third person should stand on the bridge board foot pegs to anchor it firmly to the ground.	
c. Carrying DH-95 sampling device to and from bridge locations.	c. Back strain or other injury.	c. Stop to rest, lift with legs rather than back, and use two people to carry for longer distances.	
d. Working on bridges.	d. Accidents and injury resulting from being hit by a car.	d. Wear orange safety vests, be cautious of traffic.	
e. Wading in river to collect samples.	e. Tripping, falling or being swept away due to slippery, uneven river bottom surfaces and strong currents.	e. Use extreme caution in watching footing, wear life vest, only wade if the water level/current strength is low enough to permit it, collect sample from river edge if water is too high and/or swift.	
f. Working and walking along riverbanks.	f. Tripping and/or falling due to wet and slippery rocks or sloping ground surfaces, contact with poison oak, etc.	f. Watch footing, know how to identify and avoid all poison oak, rinse immediately in stream if contact occurs.	
g. Acidifying water samples with sulfuric acid.	g. Skin or eye contact resulting in irritation, rashes or chemical burns.	g. Use dropper bottle to minimize potential for contact, acidify samples at counter level, rather than holding up to eye level, flush immediately in lab sink if contact occurs.	
h. Working outdoors in cold and/or wet weather.	h. Hypothermia, reduced resistance to illness.	h. Stay dry. Use rubberized raingear if possible. Stay hydrated preferably with warm liquids. Stop work to warm up if necessary. Snack often.	
10. SUPERVISORS SIGNATURE	11. TITLE	12. DATE	

Equipment and materials: All equipment and materials are stored with the Branch of Physical Sciences and GIS. The lead technician and the park hydrologist are responsible for making sure that adequate supplies are available and in working order prior to each sample event.



B.1.7 References:

Clesceri L.S., Greenberg A.E., and Eaton A.D. Editors (1998). Standard Methods for the Examination of Water and Wastewater (20th Edition). American Public Health Association, the American Water Works Association, and the Water Environment Federation.

National Park Service- Freshwater Workgroup Subcommittee (2002). Recommendations for core water quality monitoring parameters and other key elements of the NPS Vital Signs program, water quality monitoring component. Fort Collins, CO, National Park Service.

United States Geological Survey, variously dated, National Field Manual for the Collection of Water Quality data: United States Geological Survey Techniques of Water-Resources Investigations, Book 9, Chapters A1-A9, available online at: <http://pubs.water.usgs.gov/twri9A>.



B. 2. Riverbank Condition

B.2.1. Background

Riverbank condition has been selected as an indicator because soils and the vegetation which stabilizes them are an integral to the integrity of riparian ecosystems. Although soil erosion occurs along a river as a result of natural river processes, such erosion can be accelerated and exacerbated by visitor use. Increasing visitor use on susceptible substrates often results in increased soil erosion. Therefore, this indicator is valuable for assessing a site's ability to sustain varying types and levels of visitor use as well as assessing the overall condition of riverbanks along a given segment of river.

Riverside soils and vegetation affect water quality by regulating the entry of groundwater, surface runoff, nutrients, sediments and other particulates, as well as fine and coarse organic matter to rivers and streams. Accelerated erosion associated with trampling and visitor access can alter these processes, leading to changes in hydrology and water quality.

In addition to indicating loss of soil, erosion may affect cultural Outstandingly Remarkable Values. The amount of riverbank erosion associated with visitor use will be used as an indicator of changes that may be occurring to any cultural resources—namely to archeological sites—that may exist along the river corridor. Riverbank soil erosion that occurs at archeological sites would suggest a potential loss of site stability and loss of intact archeological artifacts and features, which are critical components of archeological site integrity. Once artifacts and features are displaced from their original context or lost, the information inherent to those deposits is also lost.

Description of indicator and standard

Indicator: Degree of riverbank erosion along the Merced River. This will be assessed through a combination of vegetative cover condition and substrate erosion condition characteristics.

Standards:

1. Channel Morphology: No greater than 10 percent increase in cross-sectional area due to bank scour in 80 percent of sites.
2. Vegetation Condition (Trend): No greater than 10 percent cover of bare ground in 80 percent of sites. This trend will be determined using the 2008 data to reflect current condition as compared to future assessments. This will help determine our desired condition and to detect change.
3. Vegetation Condition (Status): No greater than 20 percent of (strata-based) sites will have less than C percent green understory cover.

Area of Interest: Merced River in Yosemite Valley from Happy Isles Bridge to 1 km downstream of Pohono Bridge

Rationale for indicator: Riverbank erosion is accelerated by human trampling that causes loss of vegetation, compaction of soils, and loss of soil cohesion which are potential impacts to Outstandingly Remarkable Values of the river corridor.

Objectives: 1) To assess the status of and to detect change in riverbank condition, and 2) identify a relationship between visitor use and riverbank condition in order to assess the relative contribution of visitor use to changes observed in the first objective. Our goals for the 2008 field season are to collect baseline data to ensure repeat measurability in future years. We have failed to find metrics in the available literature that meet the objectives of this particular indicator for formulating standards. Therefore we hope to utilize the findings from our baseline and deliberately chosen index sites to assist in the development of standards that function best for our particular riverbank condition.

2007 Riverbank Condition Workshop: A peer review of the 2005 and 2006 monitoring protocols took place in 2007. The review combined with a workshop on the subject revealed the need for a more quantitative approach to monitoring riverbanks due to the complexity of the system and the need to be able to quantitatively describe conditions with statistical rigor. The following monitoring protocol is the



product of recommendations from this workshop and pilot study data collected in late 2007 and reported in the 2007 User Capacity Management Plan.

B.2.2. Sampling Design

Rationale for sampling design: In order to achieve the objectives, we monitor factors that directly relate to riverbank erosion: 1) Channel morphology and 2) Vegetation cover on the banks. Sites are 200 meter reaches randomly chosen from a 17 km reach within Yosemite Valley such that inferences about the overall condition of riverbanks can be made. Next, we conduct a parallel study to determine a relationship between visitor use and riverbank condition. This study utilizes the same measures as the monitoring protocol, but we deliberately choose sites based on known levels of visitor use. Development of this relationship allows us to predict consequences of changing visitor use and helps us better understand variance due to factors besides visitor use in our randomly sampled sites.

The above methodology will be complemented by continuous digital photographs of each bank of the river from Happy Isles Bridge to the former site of the Cascades Dam. This qualitative data will assure that emerging impacts not captured by sampling are caught and addressed early. Such emerging impacts can be useful in determining future site selection for our index sites. These sites will complement our study in providing important information on the condition of sites on which we have additional visitor use information.

Measurement: At each sample reach, vegetation condition along 100 meters of bank (both sides of the river) is evaluated as well as channel cross-sectional area. The condition of vegetation is assessed through a point-intercept sampling of functional vegetation groups (see field methods). Channel cross-sectional area is assessed by surveying three river cross-sections within the 200 meter reach. All monitoring locations will be marked with permanent site markers in order to accurately relocate and evaluate the same location every 3-5 years or following major flood events.

Continuous bank photography would involve using a high resolution digital camera and taking photos approximately every 50 meters along each bank or at such spacing as to allow stitching photos together without edge distortion. The resulting product would essentially be a long strip photo of the entire length of riverbank in Yosemite Valley.

Site selection (selection criteria and procedures):

Probabilistic Sample Design

For the first objective, we choose sample reaches from a sub-population of banks along the Merced River between Happy Isles Bridge and approximately 1 km downstream of Pohono Bridge. The population of all potential sites is reduced by eliminating sites with sinuosity greater than 1.1 and sites within 125 meters of bridges or other hardened banks (rip-rap, bedrock, or large boulders) longer than 50 meters. We then divide this subpopulation into two strata based on river slope: 1) Slope ≥ 0.005 and 2) Slope < 0.005 and make a sample site selection using a generalized random tessellation stratified (GRTS) spatially balanced design (Stevens Jr. and Olson, 2003, Stevens Jr. and Olson, 2004). This methodology allows us to make an 'oversample' or select many additional sites that will serve as replacement sites if some sites are rejected. Reasons for rejecting sites are discussed in the next paragraph.

The selected site represents a point at the middle of the 200 meter reach. Cross-sections are placed at 100 meters upstream of this point, at this point, and 100 meters downstream of this point. If any of the cross-sections grossly misrepresent the overall reach geometry, the site is rejected. Additionally, if a site is restored or protected through direct management action, it should be removed from the sample suite and replaced with another site.

Deliberately Chosen Sites

In order to meet the second objective we will deliberately select a number of index sites reflecting a known range of visitor use. The goal would be to develop a relationship between visitor use and riverbank condition that could be used to explain variance in the randomly selected sites, as well as serve as a predictive tool for anticipated changes in visitor use. These sites will be subjectively chosen based on User Capacity Management Monitoring Program Field Guide 2008



complementary information regarding visitation and use of these sites. Factors that will influence the selection of these sites will be access to parking, campgrounds, as well as management zones and specific destination qualities of these sites (ie. fishing holes, river put-ins, sandy beaches, etc.)

As a first step, we evaluated 9 random sites and 6 deliberately chosen sites in 2008. Data from these sites will help us determine the number of each type of site that will be required to meet this protocol's objectives. If additional sites are required, those sites will be added in subsequent years. Through the utilization of the GRTS sampling program, we will pre-select a larger number of sites, and continue to sample as time and budget allow in order to achieve the best sample size available to us under the current conditions of this project.

Sampling Schedule: Field work for this indicator will be conducted in mid-August to mid-September, depending on accessibility due to river level. LiDAR scanning may be done later in October or November after the shrubs and trees have lost their leaves.

B.2.3 Field Methods

Preparation:

Site Morphology

The following is a description of documenting and monitoring channel geometry using cross-sections and ground-based LiDAR. Documenting channel geometry involves the following steps:

1. Locating sample reach
2. Placement of permanent cross-section endpoints
3. Survey of endpoints and river cross-section

To locate the sample reach, obtain accurate maps and air photos and use a GPS unit. Install a 3 foot-long piece of rebar capped with an aluminum survey cap on the bank nearest the sample point and 3 meters from the edge of the terrace (Figure B.2.1). The cap should be labeled 'RBC#' where '#' represents the selection number of the site from the GRTS model. This is the site benchmark. Install 3 cross-sections: 1) 100 meters upstream of the site benchmark, 2) at the site benchmark, and 3) 100 meters downstream of the site benchmark. Cross-sections should extend at least 3 meters past the top edge of the river terraces on either side of the river. Cross-section endpoints are marked using rebar with aluminum caps that are labeled with the reach name, cross-section number, and which side of the river it represents. An example would be RBC3 2LX, for Riverbank Condition Reach #3, Cross-section #2 on river left. Survey the cross-section endpoints using a total survey station if possible. The cross-section endpoints also need to be located using GPS. Each cross-section will require a field sheet (see Forms) to help relocate the point in the future.

Once the plot center point has been established, this point is the end point for the center cross-section. Establish the opposite end of the center cross-section by stringing a line from the plot center point to the opposite terrace, 3 meters from the edge of the terrace. This marks the center point for the vegetation plot and sample reach for the opposite river bank.

From the center point, measure 100 meters downstream and upstream. Mark these points as the ends of the downstream and upstream cross-sections. Mark the opposite ends of these cross-sections as described above. *(Note: Cross-sections may be extended more than 3 meters from the edge of the terrace in order to place the monuments close the base of a tree for great protection from erosion.)*

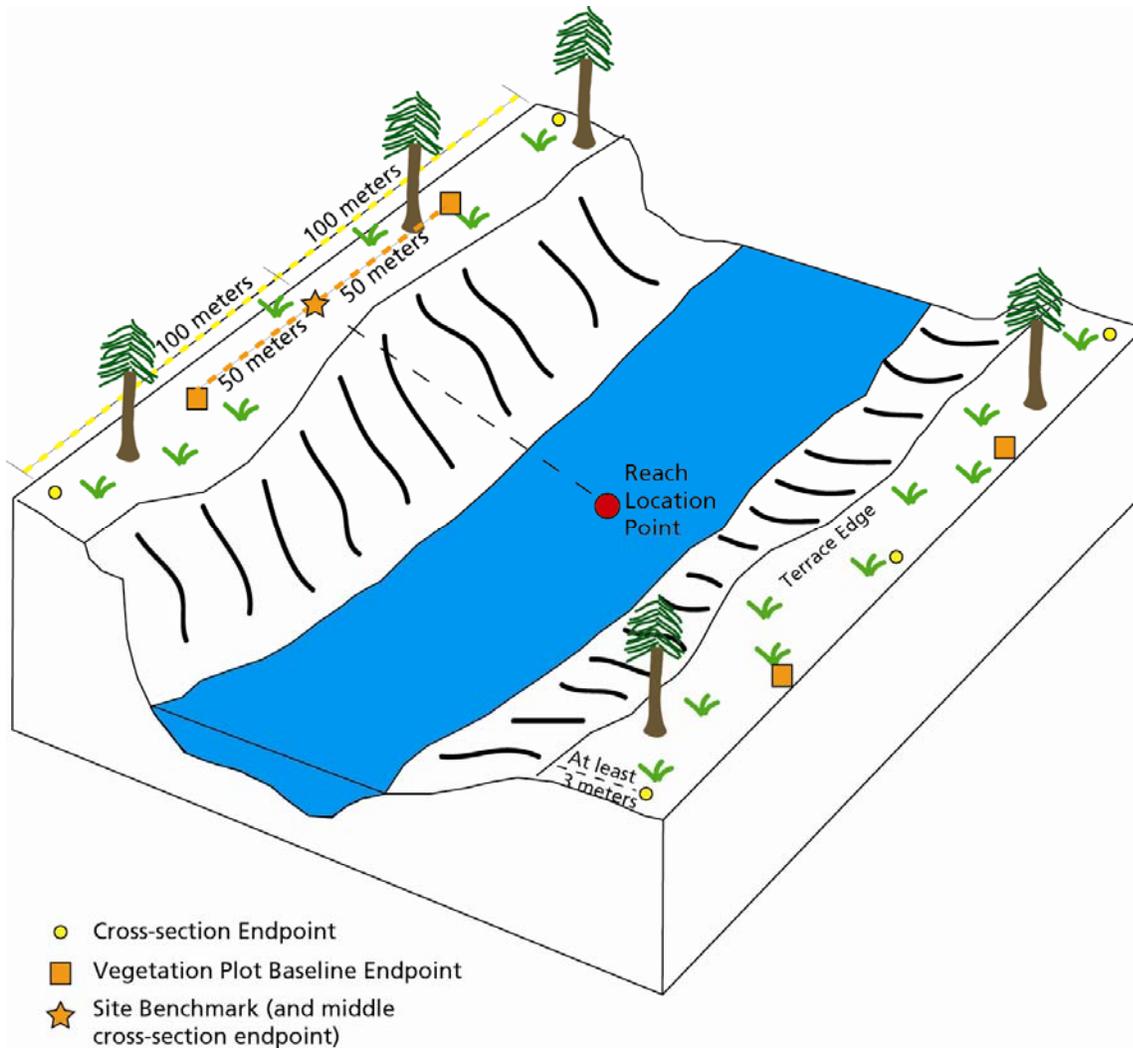


Figure B.2.1. Sample reach setup. Note that vegetation plots are on both sides of the river.

Vegetation Cover

Field personnel should be trained (see Training, below) and the following required tools and supplies should be acquired.

- One 100-meter tape
- One 50-meter tape
- 4 chaining pins
- Pin flags
- Densitometer
- Point intercept device
- Ladder (accessing steep banks)
- Extender for densitometer
- Weighted rope with 1m markings
- Pens/pencils/clipboard
- Data sheets
- Site description sheets
- Compass
- GPS unit (for plot installation)
- Hand drawn map forms for triangulating permanent monuments (for plot installation)




- Rebar, monument caps, mallet, and die set (for plot installation)
- Metal detector (to find existing plots)
- Hand drawn and GIS maps (to find existing plots)
- Sunscreen/water/lunch/personal gear
- Protocol and Field Instructions

Locate Plots

This year we will sample 15 new sites determined by our randomly selected sample and deliberately chosen sites. After each site is pre-selected, observers will locate sites in the field and determine best locations for access and establishment of the baseline. Site safety will also be determined for each chosen location and sites that present obvious hazards will be eliminated from the sample.

Data collection:

Vegetation Cover

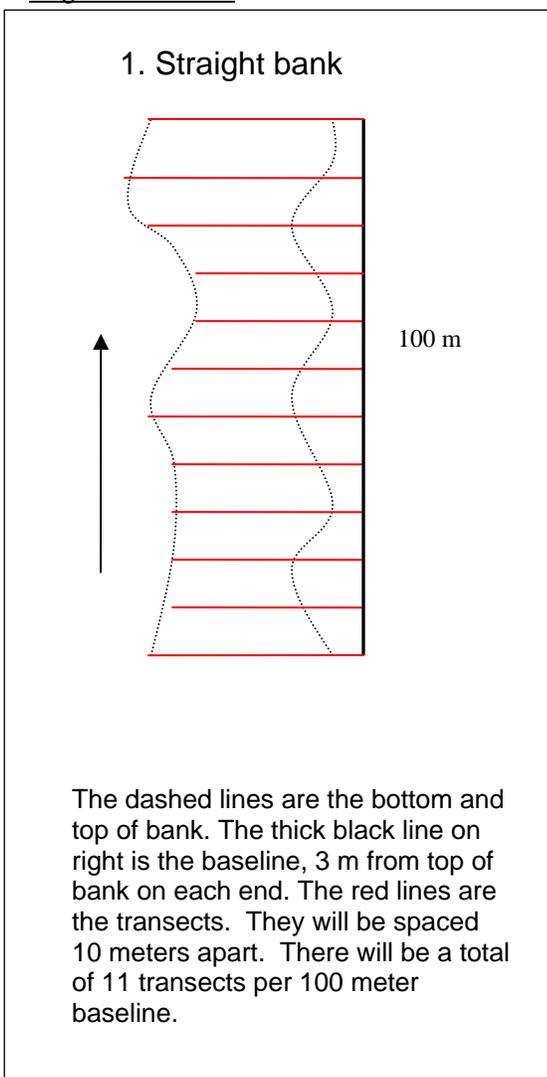

Site Description

Record a description of the site by entering information in the Site Description Sheet. This year all sites will be new sites that will be established as permanent sampling locations. Several sites will be deliberately chosen to reflect visitor use levels, while other sites are randomly selected within our 17km reach. Field observers will be given a set of points representing each reach location (Figure B.2.1). The points will be selected from the center of the river channel. Observers will need to navigate to a point on the terrace perpendicular to the point in the channel.

Plot Setup

Set up the BASELINE tape: Regularly Shaped Plots

1. Starting from the site benchmark established above, measure 50 meters upstream and downstream along a straight line. Place monument markers at 3 meters from the terrace edge. These points mark the ends of the vegetation plot baseline (Figure B.2.1).
2. Repeat this process on the opposite riverbank using the mid-reach cross-section monument as the center of the vegetation plot.

Set up the BASELINE tape: Irregular Shaped Plots/Setting up Mid-Points

1. In this case, the baseline is no longer a straight line, but rather it pivots on the site benchmark to maintain a distance of approximately 3 meters from the top of the terrace (Figure B.2.2).
2. Measure 50 meters in each direction to a point that is also 3 meters above edge of terrace for 100 meter vegetation baseline. Place a monument at this point to establish one endpoint of the



vegetation baseline. Repeat this step in the other direction of the center point to another endpoint, again 3 meters up from the edge of the terrace.

3. If either 50 meter segment falls within 2 meters of the edge of the terrace an additional point should be placed at 25 meters from the center point midway between the center point and the 50 meter endpoint (3 meters from the edge of the terrace). This will ensure an approximate equal area of terrace vegetation in each plot.

Set up the TRANSECT lines

1. Transect lines will be placed every 10 meters along the baseline tape beginning with the upstream monument endpoint and extend perpendicular to the baseline tape in the direction of the river, ending at the bottom of the river bank.
2. Mark the starting point for each of the transect line by placing pin flags along the baseline tape.

Plot Set Up: Rules and Reasoning

- 200 points must be recorded for each plot. If needed, the baseline can be lengthened to facilitate this rule. If 200 points are reached before the transect line ends, continue to collect points until you reach the end of the transect line. Transects are set up perpendicular to baseline, and extend to the bottom of the bank.
- The bottom of the bank is not determined by the waterline, but by the break in slope. There is no need to sample the actual river bed.
- All points will be classified by their existence as part of the bank or part of the terrace.
- Pin flags marking the beginning and end of the transect will help the observer keep the transect line straight. Intermediate pin flags may be helpful on long or heavily vegetated transects. Precise point placement is not critical.

Data collection

Determine Data Collection Point locations

1. Data will be collected at points along the transect lines.
2. The transect lines are located ON the ground, along the grounds contour.
 - a. On level terrain, this may seem obvious.
 - b. However, on steep terrain one could mistakenly set up a horizontal-mid-air transect line- DO NOT DO THIS.
3. The first point will be taken at 0 meters from the baseline. *Or, if the transect is moved upland to capture at least one terrace point, the first transect point will be a negative number distance from baseline.*
4. Points will be equally spaced apart, as follows:
 - a. 1 meter apart, for straight reaches, with transect lines of a reasonable length (less than 100 meters)
 - b. 2 meters apart for all transects within plot, for plots where any one transect line exceeds 100-meters.
5. Use a measuring device to determine spacing. For example, a 50-meter tape or a one-meter stick.
6. At the start of each transect, record azimuth reading from baseline in order to ensure better repeatability of sites for future monitoring efforts.

Collect Data

For efficiency, two people will work together to collect data. One person will be the OBSERVER and the other the RECORDER. To lessen bias, rotate roles.

1. OBSERVER: place an objective point-intercept device on the transect point.
2. OBSERVER: look through the scope on the point-intercept device.
3. OBSERVER: use the cross-hairs to determine the exact point location. *The point is theoretically as small as possible, extending from the ground to the canopy.*



4. Observer: observe all layers at the point; *this may result in more than 100% cover in some places.*
5. OBSERVER: dictate observations to RECORDER
6. RECORDER: record the following observations on the data sheet:
 - a. bank/terrace
 - b. substrate size (See data sheet for size classes).Record the following as presence (0) or absence (1) on the data sheet.
 - c. large wood over 25 centimeters in diameter
 - d. bare ground/ small litter
 - e. exposed roots
 - f. nonvascular plants
 - g. annual or biennial plants
 - h. fibrous-rooted perennials
 - i. tap rooted perennials
 - j. shrubs
 - k. evergreen trees
 - l. deciduous trees
7. Use a densitometer to observe canopy.
 - a. It should be in line with the ground point.
 - b. It can also be used to observe the shrub layer.
 - c. It may only be able to hit one canopy type.
 - d. Record tree species composition when canopy cover is taken (1=conifer, 2=oak, 3=cottonwood, willow, and alder)
8. RECORDER: Once the point-intercept device is in place, the recorder may move the one-meter stick to the next data collection point location. Or for even more efficiency, pin flags may be placed (using the one-meter stick for measuring) at each point.
9. OBSERVER: When all attributes for the point are recorded, move along the transect line toward the river and to the next data collection point.

Steep banks

Steep banks present accessibility problems. First and foremost, each slope should be assessed for worker safety. Do not work on a bank where a fall could produce an injury. Rocky deposits, riprap, and logjams must be carefully considered. Second, the potential for resource damage is high when working on steep slopes. It is NOT acceptable to negatively impact bank stability while collecting data. Potential solutions are:

1. Use a secured ladder to minimize foot traffic on the bed. Secure and climb the ladder starting at the bottom of the bank, never from the top.
2. In some cases an extension may work for the densitometer, but this has limited application, mainly due to its short reach and difficulty in leveling.
3. In many places a less objective method of data collecting is warranted:
 - a. A weighted rope with 1-meter markings on it can be strung along the bank, with point data collected as best as possible.
 - b. Many of the steep banks lack vegetation. Hence, this is not the worst case scenario for collecting accurate data.
 - c. Canopy data will probably need to be eliminated; unless a reasonable method and appropriate equipment are discovered.

Site Morphology

The profile survey procedure for cross-section surveys is based on Harrelson et al. (1994), Section 6 (pp. 26-32) and Section 8 (pp. 37-41). Please refer to the reference for surveying basics. If using total station surveying equipment, survey data (such as in the examples depicted below) may not be necessary.



Below are concise steps for cross-section surveys:

Cross-Sectional Profile

- Figures B.2.1 and B.2.2 provide a graphical representation and sample data of a cross-section profile.
- For each reach, tie all surveying to the site benchmark established above. Record the exact location of each endpoint (permanent marker) based on its distance and direction to the corresponding benchmark. Draw a site map to indicate location of benchmark, endpoints, and other important features and record measurements.
- Set up a taut tape across the cross section, with zero-end of the tape to the end point where elevation measurements will be taken. Starting on the left side of river is suggested for easier plotting of profiles later.
- Begin the total station survey. Be sure to record the correct height of the survey rod. Start with the endpoint stake as zero. Begin shooting points with the total station. Along the tape (cross-section), shoot a point at each change in elevation and at each important feature, on all slope breaks and at the edge of water.
- Total station data should be downloaded upon return to office.

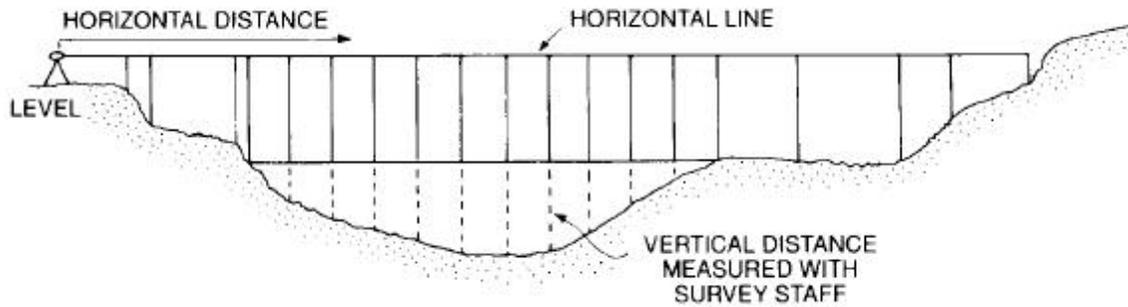


Figure B.2.2. Diagram of a cross-section survey (Harrelson et al. 1994).

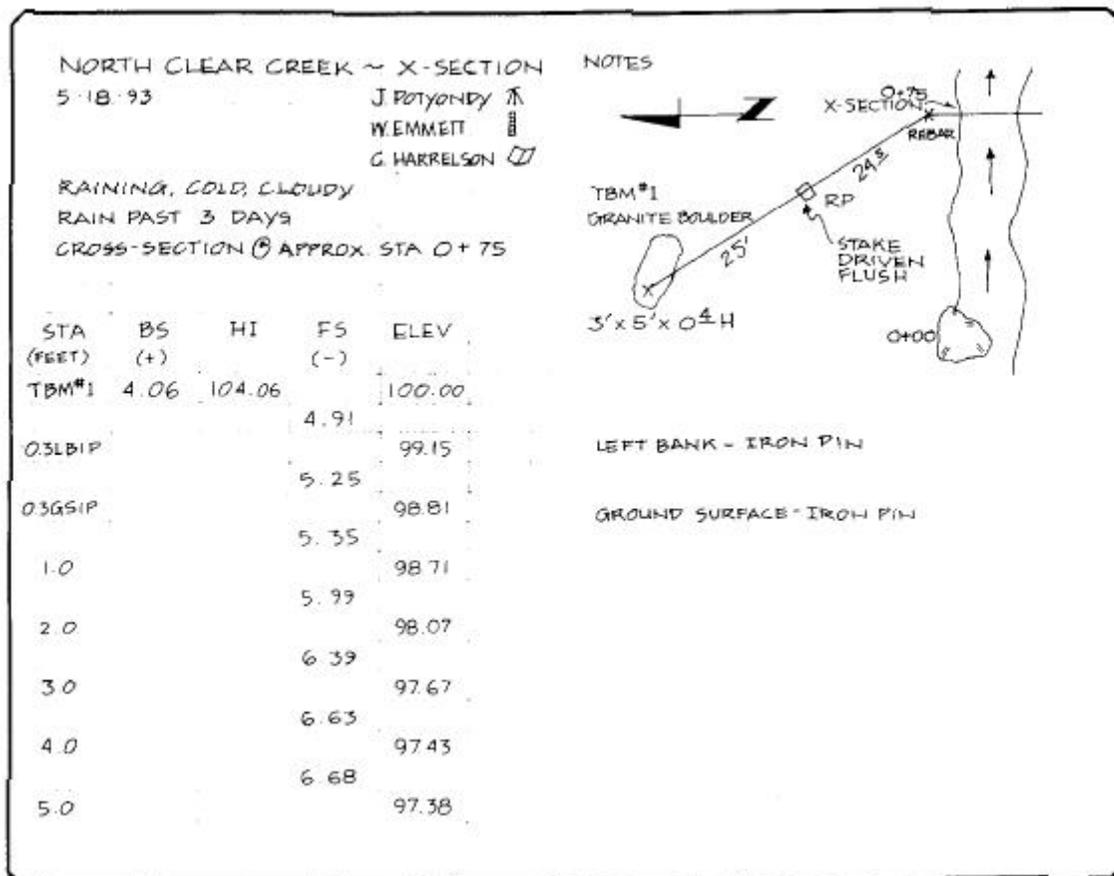


Figure B.2.3. Sample notes for cross-section survey (Harrelson et al. 1994).



LiDAR scanning of sample reaches:

- Each reach will be scanned using a ground-based LiDAR system.
- In reaches with more than 25% shrub cover, it may be necessary to do LiDAR scans after the shrubs have lost their leaves.
- A total surveying station is used to locate and orient the LiDAR unit in space. Set up the total station in a location where most/all of the reach is visible.
- Set up the LiDAR station at the upstream end of the reach, level it, and turn it on. Backsight the unit to the total station.
- Scan the area. Move the LiDAR unit downstream scanning both banks by moving from one bank to the other bank in a zig-zag pattern. 5-10 scan locations will be necessary to adequately capture the banks.

Post-collection and processing:

Site Morphology

Prepare detailed site maps using the LiDAR and cross-section data. Compute cross-sectional areas from cross-section data and LiDAR data. If previous cross-sectional data is available, compute the change in cross-sectional area using the definition of cross-sectional area below. If previous LiDAR data is available, compute changes in bank geometry and report in volume of bank material gained or lost from both left and right banks.

In order to compute changes in cross-sectional area, we define cross-sectional area as the area contained by the intersection of a horizontal line at the elevation of the lower bank cross-section monument and the cross-section perimeter below that line (Figure B.2.5). The computed cross-sectional area is then subtracted from the original cross-sectional area to obtain the amount of scour or accumulation.

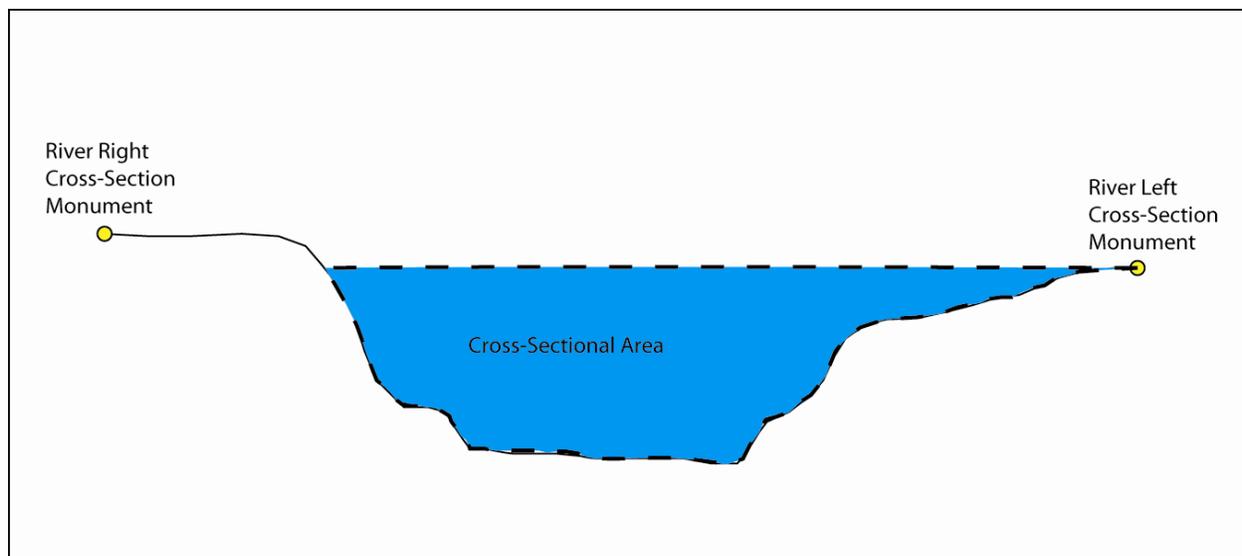


Figure B.2.4. Cross-sectional area determination



Change in bank volume will be calculated by differencing filtered LiDAR data from two different measurements. Each scan of the river reach will be converted into a digital elevation model with vegetation filtered out to the extent possible. Subsequent scans of the same riverbank will be processed similarly, and the two separate scans differenced.

Vegetation Cover

All data will be entered into the database for further analysis. All complementary documentation including field notes, site coordinates, baselines, and photo points will be logged by observers at the office. Percent cover data will be analyzed for adherence to our established standards. Statistical protocols for these analyses are currently under development.



B.2.4. Data Management

Data entry: Collected data will be entered into a database, and digital photographs will be labeled and filed electronically. Field notes will be transferred into digital form (i.e. word processed).

Data analysis: Total station surveys will be converted into detailed profiles/maps of monitoring sites. GPS points delineating monitoring sites will also be displayed on a map. The data analysis of cross-section data consists of calculation of the channel cross-sectional area and comparing this value to past values. The cross-sectional area is the area below a line drawn between the cross-section endpoints. In the case of LiDAR data, a reach volume would be calculated in a similar manner and the amount of volume change from the previous monitoring effort calculated.

Data reporting: Reach locations and associated cross-sectional data including cross-sectional area will be reported in the 2008 User Capacity Monitoring Program Annual Report.

Data storage: All collected data and compiled documentation will be stored on the YOSE NPS network (ms01/EP Commons/VERP/Monitoring Protocols/Riverbank Erosion). GIS maps and project files can be found at (TBA). Original datasheets will be stored in the office of Vegetation and Restoration.

B.2.5. Personnel Requirements and Training

Roles and responsibilities (tasks and time commitments): Supervisory GS-7 responsible for oversight of field work and training of personnel not familiar with indicator protocol and total station surveying. GS-7 field technician in charge of total station mapping, other tasks associated with assessment of permanent monitoring plots, and training and supervising other field staff. Other field staff will assist in total station mapping, as well as potentially providing quality control for rapid assessments (i.e. re-monitoring rapid assessment plots, independent from the other field technician).

Qualifications: Supervisory GS-7 should be familiar with general river geomorphology and ecology principles, have experience in natural resource monitoring and vegetation monitoring, have experience in training personnel, and versed in GPS, GIS, and total station technologies. GS-7 field technician should have some experience with these topics, namely field implementation (GPS and total station, resource impact monitoring). Other field staff would optimally possess some of these same skills. All staff should be able to make informed condition class determinations and make appropriate recordings of riverbank attributes and conditions, such as bank type, ground vegetation cover, tree root exposure and erosion features.

Training procedures: Two days will be dedicated to familiarizing field staff with indicator and protocol, GPS unit, and total station methods. Training will be conducted by staff well-versed in protocol, preferably someone who has implemented the methodology in the past.

B.2.6. Operational Requirements

Field work plan: Field work will be conducted mid-August through September when river flows are low enough to permit safe crossing. Protocol refinement will be conducted in June and July, and data analysis and reporting will be conducted in October and November. The following is an outline of the field work schedule:

Crew 1 (3 People)

- Days 1 & 2: Training
- Days 3-12: Plot setup, Cross-section installation, Vegetation Plot installation at 15 reaches
- Days 13-16: Data reduction and reporting

Crew 2 (2 People)



- Day 1: Field Preparation and receipt of LiDAR Unit
- Day 2 – 9 LiDAR scanning of 15 river reaches
- Day 10: Return LiDAR unit
- Day 10-20: LiDAR data reduction, analysis, and reporting

*Projections of time requirements are based on 10hr workday

Safety: A job hazard analysis has been completed and appears below (Table B.2.1).

Table B.2.1 Job Hazard Analysis for Riverbank Condition indicator.

United States Department of Interior NATIONAL PARK SERVICE	1. WORK PROJECT/ACTIVITY	2. LOCATION	
		VERP Riverbank Erosion Monitoring	Merced River, Yosemite Valley, YNP
Job Hazard Analysis (JHA)	3. NAME OF ANALYST	4. JOB TITLE	5. DATE PREPARED
		Christal Niederer	Technician
6. TASKS/PROCEDURES	7. HAZARDS	8. ABATEMENTS ACTIONS ENGINEERING CONTROLS – SUBSTITUTION – ADMINISTRATIVE CONTROLS – PPE	
a. Driving to, from, and around sampling sites.	a. Collision resulting in damage, injury, or death.	a. Drive defensively, obey traffic laws, lights on, seatbelt on, be alert for pedestrians, wildlife, and distracted drivers. Know procedures for installing snow chains. Always carry and know how to use a Park radio.	
b. Walking, hiking and other physical exertion.	b. Exhaustion, muscle strain, dehydration and fatigue.	b. Drink plenty of fluids, bring snacks and/or meals if out during lunch hours, Take periodic rests and stretch before and after physical activity.	
c. Wading in river to assess riverbank conditions.	c. Tripping, falling or being swept away due to slippery, uneven river bottom surfaces and strong currents.	c. Use extreme caution in watching footing, wear life vest, only wade if the water level/current strength is low enough to permit it, collect sample from river edge if water is too high and/or swift.	
d. Working and walking along riverbanks.	d. Tripping and/or falling due to wet and slippery rocks or sloping ground surfaces, contact with poison oak, etc.	d. Watch footing, know how to identify and avoid all poison oak, rinse immediately in stream if contact occurs.	
e. Working outdoors in cold and/or wet weather.	e. Hypothermia, reduced resistance to illness.	e. Wear appropriate clothing and carry extra layers. Stay dry. Use rubberized raingear if possible. Stay hydrated preferably with warm liquids. Stop work to warm	



		up if necessary. Snack often.
f. Working outdoors in hot / extreme heat weather.	f. Fatigue, exhaustion, dehydration and heat stroke.	f. Wear appropriate clothing and use sunscreen. Drink fluids and snack throughout the day. Carry extra water and dehydration salts along with first aid kit.
10. SUPERVISORS SIGNATURE	11. TITLE	12. DATE

B.2.7. References

Archer, E. K. et al. 2004. Testing Common Stream Sampling Methods for Broad-scale, Long-term Monitoring. General Technical Report RMRS-GTR-122. Fort Collins, CO: USDA Forest Service, Rocky Mountain Research Station.

Bevenger, G. S.; King, R. M. 1995. A pebble count procedure for assessing watershed cumulative effects. Res. Pap. RM-RP-319. Fort Collins, CO: USDA Forest Service, Rocky Mountain Forest and Range Experiment Station, 17p.

Chambers, Jeanne C.; Brown, Ray W. 1983. Methods for Vegetation Sampling and Analysis on Revegetated Mined Lands. General Technical Report INT-151. Ogden, UT: USDA Forest Service, Intermountain Forest and Range Experiment Station. 57p.

Davis, J. C., Minshall, G. W., Robinson, C. T., & Landres, P. 2001. Monitoring Wilderness Stream Ecosystems. General Technical Report RMRS-GTR-70. Ogden, UT: USDA Forest Service, Rocky Mountain Research Station.

Environmental Protection Agency 1997. Volunteer Stream Monitoring: A Methods Manual. EPA 841-B-97-003. Washington, DC: USEPA Office of Water.

Goudie, A., ed. 1990. Geomorphological Techniques (2nd Ed.). Cambridge, MA: Unwin Hyman

Harrelson C. C., Rawlins, C. L. and Potyondy J. P. 1994. *Stream Channel Reference Sites: An Illustrated Guide to Field Technique*. General Technical Report RM-245. Fort Collins, CO: USDA Forest Service, Rocky Mountain Forest and Range Experiment Station.

Hawkesbury-Nepean Catchment Management Trust. 2000. Guidelines for Assessing and Monitoring Riverbank Health. Windson, NSW, Australia.

Herrick, J. E., Van Zee, J. W., Havstad, K. M., Burkett, L. M., & Whitford, W. G. 2005. Monitoring Manual for Grassland, Shrubland, and Savanna Ecosystems (2 Volumes). Las Cruces, NM: USDA-ARS Jornada Experimental Range.

Kershner, J. L.; Archer, E. K.; Coles-Ritchie, M.; Cowley, E. R.; Henderson, R. C.; Kratz, K.; Quimby, C. M.; Turner, D. L.; Ulmer, L. C.; Vinson, M. R. 2004. Guide to effective monitoring of aquatic and riparian



resources .Gen.Tech.Rep.RMRS-GTR-121. Fort Collins,CO:USDA Forest Service, Rocky Mountain Research Station, 57p.

Madeji, M. A.; Weaver, W. E.; Hagans, D. K. 1994. Analysis of bank erosion on the Merced River, Yosemite Valley, Yosemite National Park, California, USA. *Environmental Management*. 18: 235-250.

Morgan, R. P. C. 1995. *Soil Erosion and Conservation* (3rd Ed.). Longman.

Newton, B., Pringle, C., and Bjorkland, R. 1998. *Stream Visual Assessment Protocol*. National Water and Climate Center Technical Note 99-1. USDA Natural Resources and Conservation Service.

Pfankuch, D. J. 1975. *Stream reach inventory and channel stability evaluation: a watershed management procedure*. St. Paul, MN: USDA Forest Service, Northern Region.

Phillips, B. G., Johnson, R. A., Phillips, A. M. I., & Brian, N. J. 1986. *Monitoring the Effects of Recreational Use on Colorado River Beaches in Grand Canyon National Park*. Bulletin Series No. 55. Flagstaff, AZ: Museum of Northern Arizona Press.

Platts, W. S.; Armour, C.; Booth, G. D. and others 1987. *Methods for Evaluating Riparian Habitats with Applications to Management*. General Technical Report INT-221. Ogden, UT: USDA Forest Service, Intermountain Research Station. 177p.

Schoeneberger, P. J., Wysocki, D. A., Benham, E. C., & Broderson, W. D. 1998. *Field Book for Describing and Sampling Soils* (Ver. 1.1) Lincoln, NE: USDA Natural Resources Conservation Service, National Soil Survey Center.

Stevens Jr., D. L., and A. R. Olsen. 2003. Variance estimation for spatially balanced samples of environmental resources. *Environmetrics* 14:593-610.

Stevens Jr., D. L., and A. R. Olsen. 2004. Spatially Balanced Sampling of Natural Resources. *Journal of American Statistical Association* 99:262-278.

Winward, A. H. 2000. *Monitoring the Vegetation Resources in Riparian Areas*. General Technical Report RMRS-GTR-47. Ogden, UT: USDA Forest Service, Rocky Mountain Research Station.

Yetman, K. T. 2001. *Stream Corridor Assessment Survey*. Annapolis, MD: Maryland Dept. of Natural Resources, Chesapeake & Coastal Watershed Service, Watershed Restoration.

Young, M. K., Mace, E. A., Ziegler, E. T., Sutherland, E. K. 2006. Characterizing and contrasting instream and riparian wood in western Montana basins. *Forest Ecology and Management* 226: 26-40.



B.3. Wildlife Exposure to Human Food

B.3.1 Background

The most direct and prevalent way visitors adversely affect wildlife in Yosemite is by purposely feeding animals, leaving food improperly stored, or leaving food debris on the ground or picnic tables. This leads to alteration in the animals' behavior and roles in the ecosystem, as animals exposed to human food continue to seek it out. In extreme cases, fed animals become aggressive and dangerous, and must be killed to protect human safety. This modification of wildlife behavior and ecological roles adversely affects the biological outstanding remarkable value (ORV) and that of recreation quality.

There is a likely correlation between the number of visitors in Yosemite Valley and the opportunities for wildlife to be exposed to human food. More visitors means more people feeding wildlife, more people improperly storing food, and more food debris left behind, if the proportion of visitors engaging in these behaviors remains constant over the range of visitor numbers. Also, trash cans and dumpsters are more likely to overflow, allowing animals access to garbage. The number of staff dispensing information about park regulations through personal contact, and frequency of garbage removal remains relatively constant at given times of year, and among many years, regardless of the number of visitors. Therefore, as the number of visitors goes up, the proportion of them who receive information and warnings likely goes down, the chance of overflowing trash receptacles increases, and intentional feeding of wildlife increases resulting in higher human-wildlife conflicts.

Description of indicator and standard:

Indicator: Number of instances wildlife could be exposed to human food.

Standard: 95% or greater compliance with food storage regulations in selected campgrounds and parking areas.

Rationale for indicator: Current management of human-wildlife conflicts call for "zero tolerance" for allowing animals access to human food. This is especially true for black bears, which quickly become conditioned to human food and, as a result, can become dangerously aggressive and must be killed. The severity of this problem requires the expenditure of considerable funding and staff time to provide visitor education, patrol to look for food left available to animals, enforce food storage regulations, and haze bears out of developed areas. Despite these extensive efforts, and the zero tolerance policy, it is unrealistic to believe that *all* availability of human food to wildlife can be controlled. It was, therefore, decided that steady progress in removing human food from the diets of wildlife would be a reasonable measure of the effect of visitation level on wildlife exposure to human food.

Objectives: Provide accurate assessment of food storage compliance rates and food storage violations in campgrounds and parking lots.

B.3.2 Sampling Design

Currently, statistics on the availability of human food to wildlife is documented through the park's Bear Patrol Log Database (BPLD). The BPLD was developed for the Human-Bear Management Program in 2005 to ensure accountability with bear-funded employees and to collect data on bear monitoring and management activities in the field. In Yosemite Valley, there are an average of 15 bear funded employees that spend a minimum 80% of their time on bear related issues between the months of May and October. These employees include Protection, Campground and Interpretation Rangers, and Wildlife Technicians. While the primary duties differ among work units, all employees share the common goal of mitigating human-bear conflicts and protecting wildlife from exposure to human food. This is accomplished through proactive patrols between the hours of 5 p.m. and 6 a.m. when bear activity is the greatest. During patrols, visitors are educated about proper food storage through one-on-one interpretive contacts, campsites and vehicles are checked for food storage compliance, and food storage regulations are enforced through verbal or written warnings and citations. For this indicator, average compliance rates are determined by inspecting either a certain number of campsites or vehicles. Non-compliance is defined as an



incident in which a violation of human food-related park regulations is observed by the field staff that necessitates immediate management action such as issuing verbal or written warning.

Non-compliance includes the following violations:

- B.1. Feeding human food to wildlife – Knowingly offering human food or baiting wildlife.
- B.2. Improper food storage – Human food stored in locations that are considered inappropriate, such as inside vehicles after dark or in containers that are not approved by the park as wildlife resistant;
- B.3. Improper use of food locker – Food is put in food locker but the locker is wide open, unlocked, or not latched in a way consistent with the instructions provided and the visitors are either away from their site or asleep.
- B.4. Leaving food unattended – Food left in open locker, out in campsite, or other location where the food is out of arms reach, is not actively being prepared or eaten, and/or the food is not visible to any of the camp occupants.

Campground inspections to determine compliance rates are generally conducted after 10 p.m. when most visitors are finished eating dinner and food is put away. Inspections conducted earlier than 10 p.m. often result in a very low compliance rate because most people preparing dinner have their food lockers open and food items out of arms reach. These incidents are documented in the BPLD as educational contacts rather than violation or inspection records.

Parking lot inspections are conducted throughout the night, but because food stored inside vehicles during daylight hours is legal, compliance checks on vehicles can only be performed after dark.

On many occasions, especially when responding directly to bear activity, food storage violations are found, corrected and documented, but are not calculated in the average compliance rate for an area because they are not part of an inspection. In the BPLD, food storage violation records can either stand alone or be part of an inspection record.

Site Selection: Inspections will take place in the following Yosemite Valley locations: Upper Pines Campground (C.G.), North Pines C.G., Lower Pines C.G., Camp 4 C.G., Housekeeping Camp (campsites only), Curry Village Parking Lots, Curry Orchard Parking Lot, Ahwahnee Parking Lot, Yosemite Lodge Parking Lot, Wilderness Lot, and Camp 4 Parking Lot.

Sampling Schedule: Inspections will be performed as time permits, but no less than once a week for each location, from May 15, 2008 through November 10, 2008. Inspections will occur during weekdays and weekends.

Equipment and supplies:

- 1 Flashlights and headlamps with extra batteries
- 3 Park radio
- 4 PDA or Field forms: Data sheets
- 5 Clipboard/pencils
- 6 Warning flyers/notices
- 7 Manual counter.



B.3.3 Field Methods

Preparation: Gather all datasheets or the handheld computer (PDA).

Data collection and measurement: Procedures listed below are taken from the Bear Patrol Log Database Manual on collecting and entering data.

INSPECTIONS

- All inspections will be entered into the Bear Patrol Log Database. Data will include the date, location, start and end time, number of campsites or vehicles checked, and the number of campsites or vehicles that are non-compliant.
- Inspections of campsites and Housekeeping Camp units should occur only after the dinner hour when visitors are not preparing food.
- Inspections of vehicles must be completed after dark.
- Inspections of concessions facilities except Housekeeping Camp units may be completed at any time of day or night.
- If non-compliant vehicles, campsites, facilities or trashcans are found, a food storage detail record must be completed for those violations. For example if 300 cars are checked and 4 are found with food in them and the visitors are woken up because of food in their cars, an inspection detail would be completed along with a food storage detail. The food storage detail would list the 4 violations of unattended food in vehicle and the action would be a verbal warning.

FOOD STORAGE VIOLATIONS

- Spot checks for food storage violations occur on a nightly basis during patrols. All violations will be entered into the Bear Patrol Log Database. Data will include the date, location, time violation was found, type of violation, number of violations if more than one, and the type of warning issued.
- Violation Types:
 - **Baiting** - Knowingly offering or leaving human food for wildlife.
 - **Bear Box/Improperly Locked** - Food is put in food locker but the locker is not latched in a way consistent with the instructions. The visitors may be either away from their site, inside a tent or vehicle (RV) or asleep.
 - **Bear Box/Left Open** - Food is put in food locker, but the locker is wide open or completely unlatched **and** the visitors are either away from their site, inside a tent or vehicle (RV) or asleep.
 - **Unattended/Food or Attractant** - Food left out in campsite, or other location and the visitor is not in the campsite or asleep. Example: Camper at Upper Pines is no where to be found (i.e. in bathroom or sleeping) and there is a bag of marshmallows on his picnic table.
 - **Visitors Too Far From Food** - Visitor is in site and awake. Food left in open locker, out in campsite, or other location where the food is out of arms reach, is not actively being prepared or eaten. Example: Campers in Upper Pines are sitting around fire with their back turned to their food and are 10 feet away.
 - **Unattended/Food or Attractant in Vehicle.**
 - **OB Camper w/Food in Vehicle.**



Figure B.3.1 Datasheet- Wildlife Exposure to Human Food

2006 BEAR MANAGEMENT PATROL LOG

DATE:

Name(s):

INSPECTIONS (CARS, CAMPSITES, CONCESSION FACILITIES)

Location	Start Time	End Time	Number Checked	# Non-Compliant

VISITOR CONTACTS

Location	Number of Contacts
Upper Pines	
Lower Pines	
North Pines	
Camp 4	
Housekeeping	

FOOD STORAGE VIOLATIONS

Location	Site	Time	Violation	Warning Type	Number of Violations



B.3.4 Data Management

Data entry: Patrol data will be recorded on PDA's or datasheets. Data will then be entered into the Bear Patrol Log Database at the end of each patrol shift, or at the beginning of the next patrol shift.

Data analysis: Data for this indicator will be queried and analyzed each November for the summary report. Quality control will be performed by the Wildlife Management Office at least once a week in May and June and once a month for the remainder of the season. Food storage compliance rates will be determined by taking the average compliance rate each month from May through October. Compliance rates will be analyzed for each monitoring site.

Data reporting: Results will be compiled and presented in the UCMMP Annual Report. Additionally, information will be presented at a public meeting and made available on the park's website.

Data storage: The Bear Patrol Log Database is stored on the park's network and can be accessed through Citrix. Hard copies of completed datasheets will remain on file with the Wildlife Office and copies sent to the Integrated Resources Analysis Branch in EI Portal.

B.3.5 Personnel Requirements and Training

Roles and responsibilities (tasks and time commitments): Monitoring efforts and data collection will be performed by the Yosemite Interdivisional Bear Team. This team is comprised of employees from several different work units including Campground, Interpretation and Protection Rangers, and Wildlife Technicians. An average of 15+ individuals will be involved in the data collection. The Wildlife Management Branch is responsible for the Bear Patrol Log Database including maintenance, quality control, improvements, and training.

Qualifications: Before data is collected, all employees, volunteers, and interns on the Interdivisional Bear Team will be trained in bear management and patrol activities, black bear biology, the Bear Patrol Log Database, and data collection methods.

Training: Wildlife Management staff with experience surveying and monitoring non-compliance of food storage will be responsible for training any NPS staff or volunteers without prior monitoring experience. NPS staff and volunteers will be required to demonstrate the ability to:

- Navigate to inspection sites.
- Identify and differentiate various types of non-compliance.
- Make appropriate recordings for non-compliance and related attributes.
- Enter field data into the Bear Patrol Log Database.

These skills will be verified through field training and assistance of qualified Wildlife Management staff. In addition, all members of the bear team using the database will be given a copy of the Bear Patrol Log Database Manual.

B.3.6 Operational Requirements

Safety: Particular attention will need to be given to collecting data in a safe manner as personnel will be working at night, alone in some occasions and within high use bear activity areas. A job hazard analysis has been completed and appears below (Table B.3.1).



Table B.3.1 Job Hazard Analysis for Wildlife Exposure to Human Food

United States Department of Interior NATIONAL PARK SERVICE	1. WORK PROJECT/ACTIVITY	2. LOCATION	
	Wildlife UCMMP	Yosemite Valley, YNP	
Job Hazard Analysis (JHA)	3. NAME OF ANALYST	4. JOB TITLE	5. DATE PREPARED
	Tori Seher	Wildlife Biologist	July, 2006
6. TASKS/PROCEDURES	7. HAZARDS	8. ABATEMENTS ACTIONS ENGINEERING CONTROLS – SUBSTITUTION – ADMINISTRATIVE CONTROLS – PPE	
a. Driving to, from, and around sampling sites.	a. Collision resulting in damage, injury, or death.	a. Drive defensively, obey traffic laws, lights on, seatbelt on, be alert for pedestrians, wildlife, and distracted drivers. Know procedures for installing snow chains. Always carry and know how to use a Park radio.	
b. Walking, hiking and other physical exertion.	b. Exhaustion, muscle strain, dehydration and fatigue.	b. Drink plenty of fluids, bring snacks and/or meals if out during lunch hours, Take periodic rests and stretch before and after physical activity.	
c. Encountering / managing wildlife.	c. Bite, attack or other injury resulting from incidental or violent interaction with wildlife or the use of wildlife management tools such as firearms.	c. Work in coordination with trained wildlife staff, use caution when dealing with wildlife and follow appropriate safety procedures for the use of management tools such as firearms. Carry first-aid kit and radio during patrols.	
d. Working outdoors in cold and/or wet weather.	d. Hypothermia, reduced resistance to illness.	d. Wear appropriate clothing and carry extra layers. Stay dry. Use rubberized raingear if possible. Stay hydrated preferably with warm liquids. Stop work to warm up if necessary. Snack often.	
e. Working during nighttime hours.	e. Injury resulting from over-tired or exhausted condition due to late night working hours and working in the dark.	e. Maintain healthy sleeping habits. Eat and drink appropriate meals for consistent energy (coffee is not an appropriate food source). If overly tired, take breaks and rest. Always carry charged flashlights with extra batteries.	
10. SUPERVISORS SIGNATURE	11. TITLE	12. DATE	



B.3.7 References:

- Graber, D.M. (1982) Ecology and management of black bears in Yosemite National Park. Coop. Parks Studies Unit, Univ. of Calif. Davis, Tech. Report No. 5. 206 pp.
- Harms, D.R. (1980) Black bear management in Yosemite National Park. Int. Conf. Bear Res. and Manage. 4:205-212.
- Matthews, S.M., B.K. Lackey, S.S. Greenleaf, H.M. Leithead, J.J. Beecham, S.H. Ham, H.B. Quigley. (2003) Final Report: Human-bear interactions in Yosemite National Park. Hornocker Wildlife Institute/Wildlife Conservation Society.
- Thompson, S.C., and K.E. McCurdy. (1995) Black bear management in Yosemite National Park: more a people management problem. Proceedings of the Fifth Western Black Bear Workshop. pp 105 – 115.



B.4. Extent and Condition of Informal Trails

B.4.1 Background

Informal trails (or visitor-created “social” trails) may be defined as discernible and continuous trail segments that were created by visitors and which do not follow a park’s formal trail system (Leung et al. 2002). Since informal trails are not planned or constructed they are usually poorly located with respect to terrain. These trails also receive very little or no maintenance. These factors substantially increase their potential for degradation in comparison to formal trails. The proliferation of informal trails may increase habitat fragmentation and can directly threaten sensitive habitats when crossed or accessed by unplanned trails (Tylser and Joghson 2004). From a social perspective, a web of informal trails creates a visually scarred landscape and may lead to safety and liability concerns. Due to their ecological and social significance, informal trails are a common indicator selected in different implementations of NPS’s VERP planning framework and Vital Signs monitoring program.

Monitoring can provide timely information on the extent, distribution and condition of informal trail segments. The findings from data collection combined with established minimum acceptable conditions can serve as warning signs of resource degradation and habitat intrusion. In turn, such information can trigger management action.

Most previous informal trail monitoring studies focused on their proliferation (number of places they occurred) throughout the park landscape. These studies did not include any added information about the trail. For example, trail length, width, or classification was not recorded. This approach made it difficult to assess the affect the trails may have on the resources. Fortunately, three main monitoring approaches have been developed specifically for informal trails. One approach is to include informal trails as part of an overall visitor impact study. In this type of study, the level of informal trail proliferation is assessed by tallying the occurrence of informal trail segments extending from formal trail networks or recreation sites (Marion 1994; Leung et al. 2002). Another approach is to inventory and map the entire informal trail network of a park or selected portions of a park (Cole et al. 1997; Leung et al. 2002). Yet another approach, used to enable temporal evaluation and used in a few studies, is to actually monitor informal trail networks more than one time (YOSE 2005). Condition class ratings and assessments were incorporated into most of the studies using these approaches.

Due to the extensive nature of some informal trail networks, the efficiency of field assessments is a particular concern. The advent of geospatial techniques seems to provide potential solutions to this challenge. Major developments are currently occurring with the rapid advancements of geospatial technologies, such as geographic information systems (GIS), global positioning system (GPS), remotely sensing and the digital spatial data. These technologies are particularly relevant to informal trail monitoring due to their dispersed spatial distribution. In 2004, Witztum and Stow demonstrated the utility of multi-spectral imagery and digital image processing techniques in extracting informal trails in a coastal sage scrub community (Witztum and Stow 2004).

This field protocol presents the data requirements and data collection procedures for surveying the extent and condition of informal trails in selected sites in Yosemite Valley and Tuolumne Meadows, an indicator that was first implemented in 2004. The User Capacity Management Program identified two zones to be monitored in Yosemite Valley, 2B Discovery and 2C Day Use. The meadows to be monitored in those zones are: Stoneman, Ahwahnee, Cooks, Sentinel, Woskey Pond, Leidig, El Capitan, and Bridalveil. In 2005, the User Capacity Management Program added Tuolumne Meadows as an area of interest for informal trail monitoring. This was in part driven by the need to collect baseline data to be used in conjunction with the Tuolumne Meadows Concept Plan. Thus, in 2005, mapping began in the main sections of Tuolumne Meadow, north of Tioga Road. In 2006, monitoring included meadows on the South side of Tioga Road, and other areas encompassed by the Tuolumne Wild and Scenic corridor and the Tuolumne Concept Plan. In 2007, baseline data was further expanded with monitoring conducted in the high use areas between the Lyell and Dana forks of the Tuolumne River.



The standards presented in the User Capacity Management Program were based on 1990 data. It was decided that data on current conditions should be used as the basis for future monitoring. This methodology described will be used to determine current conditions and to monitor them in the future. The standards were revised to develop a more rigorous data set from which future monitoring efforts will be measured.

Original methodology was refined and repeated in 2005 to confirm 2004 mapping results. Particular attention was placed on clarifying condition class definitions. Resulting from workgroups in 2005 through 2007, it has been decided that the *extent* of informal trails (as represented by density of informal trails) is a more meaningful parameter than solely *length* of informal trails because it is relative and allows for cross-meadow comparisons. In 2007, condition classes will again be assigned to all mapped trails. However, “barely discernible trail” and “flattened vegetation” will be eliminated and the remaining condition classes will include stunted vegetation, some bare ground, barren and braided. Rutted and braided will also remain as condition class attributes. Disturbed areas will be delineated as polygon shapes so that an integrated parameter of “density of disturbed area” can also be achieved. Otherwise, most methodologies will remain consistent with 2006 protocol.

Description of indicator and standard

Indicator: Extent (density) and condition of informal trails in the meadows of Yosemite Valley and in the meadows and high use areas of Tuolumne Meadows. These are specific areas of concern due to their location within the corridors of the Merced and Tuolumne Rivers, which have been given the congressional status of “Wild and Scenic”, thereby requiring compliance with the regulations protecting rivers of this designation.

Standard: No net increase in density of informal trails when compared with baseline (for Yosemite Valley). Baseline established in 2004 and 2005. In Tuolumne Meadows, 2007 mapping will add to data collected in 2005 and 2006 to increase baseline dataset. Baseline will be updated as restoration actions are implemented and data are re-collected to reflect restoration efforts. In addition, a range of density threshold values of disturbed areas and trailing will be developed through consultation with professionals specializing in recreation and meadow ecology. The resulting standard will be developed through a combined effort from scientists and park management/planning specialists and will be based on desired conditions associated with particular management zones designed to protect Wild and Scenic River ORV's.

Zone(s): 2B Discovery, 2C Day Use, and Tuolumne Meadows Concept Plan area.

Rationale for indicator: Monitoring the extent and condition of informal trails in the meadow contributes to the protection and enhancement of many of the Outstandingly Remarkable Values of the Merced River Corridor. The biological Outstandingly Remarkable Value is represented through the following rationale: the extent and condition of informal trails is indicative of the contiguity and ecological health of meadows and wetland areas, and impacts to wildlife habitat, including special-status species. The cultural Outstandingly Remarkable Values is represented through the fact that archaeological sites and traditional gathering areas used by American Indian groups exist in some meadows, and could be affected by the proliferation and length of informal trails in meadows. The recreation Outstandingly Remarkable Value is represented through the belief that informal trails in meadows may affect visitor experience, as meadows are enjoyable areas in which to engage in a variety of recreational opportunities—including nature study, photography, etc. And lastly, but not finally, the scenic Outstandingly Remarkable Value is represented by the extent to which informal trails may impact the scenic interface of river, rock, meadow, and forest.

Objectives

To document the extent and condition of informal trails in meadows of Yosemite Valley and Tuolumne Meadows; to further establish baseline data on these impacts; and to compare results (where applicable) to data collected in 2004 through 2007. Results will be used to inform management decisions regarding protection of meadow health.

B.4.2 Sampling Design

Rationale for sampling design: In 2004, a GPS inventory of informal trails in the meadows of Yosemite Valley was undertaken. Monitoring was repeated in 2005 to verify results and explore potential factors



that could cause variation in collected data (e.g. monitoring post-deer rut, which potentially skewed results; weather variability influencing soil moisture and trailing patterns, etc.). In 2006, four Yosemite Valley meadows were chosen to be monitored: El Capitan, Cooks, Stoneman and Woskey. El Capitan, Cooks, and Stoneman meadows exhibited an increase in trail length between 2004 and 2005, so they were monitored to confirm trends in informal trail development. Woskey Pond was chosen randomly. In 2007, five meadows will be monitored: Stoneman, Leidig, Sentinel, Ahwahnee, and Bridalveil. Stoneman exhibited a slight increase in trail length so it will be monitored to confirm trends in informal trail development. Leidig was chosen using a random table. Sentinel, Ahwahnee and Bridalveil were selected since they were last monitored in 2005.

In the future, meadows to be chosen will be based on those that exhibit trends towards informal trail increase, as well as, on a rotational schedule. These sampling methods should prove to be useful in capturing the range of long and short-term impacts caused by the many activities in these two very busy areas of the park.

In Tuolumne Meadows, no data existed on informal trails until mapping was conducted in the main meadow area (north of Highway 120, east of Pothole Dome, and west of Lemberg Dome) in 2005. In 2006, monitoring efforts focused on expanding this baseline data in high use areas to the east of the Highway 120 Bridge. In 2007, additional baseline data will be collected in the high use areas between the Dana and Lyell forks of the Tuolumne River. This inventory of informal trails in the Tuolumne Meadows area is needed to create a baseline to which data from subsequent monitoring efforts can be compared. It will also be used in the Tuolumne Meadows Concept Plan planning efforts. Later, assessments may involve monitoring selected meadow areas via a sampling scheme similar to the one described above for Yosemite Valley.

Site selection: In Yosemite Valley, five meadows will be monitored: Stoneman, Leidig, Sentinel, Ahwahnee, and Bridalveil. In Tuolumne Meadows, additional baseline data will be collected in the high use areas between the Dana and Lyell forks of the Tuolumne River.

Sampling schedule: In Yosemite Valley, monitoring will be conducted over a four-week period, between mid-July and mid-August (before the fall deer rut). In Tuolumne Meadows, monitoring will be conducted between September and October, weather and road conditions permitting.

B.4.3 Field Methods

Preparation: Field personnel should be trained (see Training, below) and the following required tools and supplies should be acquired:

- GPS
- Clipboard and pencils
- Notebook
- Measuring tape
- Copy of indicator protocol
- Map of area of interest
- Digital camera
- Photo-documentation sheets (on waterproof paper)
- Pin flags
- Radio
- Water
- Lunch

Data collection and measurement: Field technicians should travel to the meadow to be monitored, and turn on GPS, so that it can begin to acquire satellites. Follow "Field Instructions" for complete, step-by-step data dictionary procedures.

Disturbed areas, regardless of size, should be entered as a polygon feature. Informal trail classifications should be entered into the GPS as a line feature. Additionally, the appropriate condition class and any



subsequent features should be recorded for each trail segment. When choosing the appropriate condition class, use the following list of characteristics and photo examples as a guide. See figure below (Figure B.4.1).

Condition Class: **Stunted Vegetation**

Data Dictionary field: **Line Feature**

Photo Examples:



General Characteristics:

- *Distinct trail* feature present
- Trail boundary *present*
- *Moderate* repeated human use evident
- *Trampled and matted* vegetation
- Noticeably *impeded* vegetation growth

Condition Class: **Some Bare Ground**

Data Dictionary field: **Line Feature**

Photo Examples:



General Characteristics:

- *Distinct trail* feature present
- Trail boundary present and *in some areas, distinct*
- *Heavy* repeated human use evident
- *Trampled and matted* vegetation
- Noticeably *impeded* vegetation growth
- *Some bare ground* present in trail tread



Condition Class: **Barren**
Data Dictionary Field: **Line Feature**
Photo Examples:



General Characteristics:

- *Distinct trail* feature present
- Trail boundary present and *distinct in most areas*
- *Extensive* repeated human use evident
- *No vegetation* present
- *Bare ground* present in trail tread *throughout*

Informal Trail Feature: **Disturbed Area**
Data Dictionary Field: **Polygon Feature**
Photo Examples:



General Characteristics:

- Polygon-type shape
- High use area
- Must exhibit one of the following condition classes: Stunted vegetation, some bare ground or barren

Informal Trail Features: **Single Trail** (with braided trail as an attribute) and **Braided Segment**



Data Dictionary Field: **Line Feature**

Photo Examples:



General Characteristics:

- Two or more adjacent trails (5 feet apart maximum)
- Must be a minimum of 25 feet in length
- Must exhibit one of the following condition classes: Stunted Vegetation, Some Bare Ground and/or Barren

Informal Trail Feature: **Single Trail**

Attribute of the informal trail feature: **Rutted**

Data Dictionary Field: **Line Feature**

Photo Examples:



General Characteristics:

- Trail with depth greater than 6 inches
- Must be a minimum of 25 feet in length
- Must exhibit one of the following condition classes: Stunted Vegetation, Some Bare Ground and/or Barren

- **Figure B.4.1**
- **Informal Trails**
- **Condition Class Characteristics and Photo Examples**



General Mapping Plan:

Using the field maps you brought with you, orientate yourself and make a plan for data collection.

A. Informal Trails:

1. If in the first or fifth year of data collection, map meadow boundary/area of study first.
2. Next, map perimeter trails- placing pin flags at the beginning of side trails.
3. Then, map the longest trails- again placing pin flags at the beginning of side trails.
4. Next, map the side trails- removing the pin flag when you begin to map said trail. Additionally, if there is a sub-side trail, place pin flags at the beginning of said trail.
5. Continue in this fashion until all main trails and side trails are mapped.

B. Disturbed Areas:

1. Map the trail leading to the disturbed area first.
2. If a trail bisects a disturbed area, map the trail through the disturbed area. Either immediately resume mapping the disturbed area, or mark it with a pin flag and return later.
3. When walking the disturbed area boundary, always walk in the same direction and place a pin flag at the starting point- or at least take note of a distinguishing feature.

Note: For large meadows, you may want to break it into segments. Mark the segments on the map with a pen and on the ground by using pin flags.

Note: Use the map to keep track of the trails/disturbed areas you have mapped, by writing directly on the map.

Mapping Protocol:

Informal Trails:

1. DO NOT MAP FORMAL TRAILS (i.e. the Valley Loop trail, and formal hiking trails in Tuolumne).
2. Map the meadow boundary/area of study when it is in the first year of data collection (establishing a baseline) and then repeat every 5 years or if there has been a noticeable change in meadow boundary.
Note: There is no need to GPS meadow edges that abut a road or formal trail.
3. Map all informal trails, regardless of size/length.
4. Map all informal trail classifications from beginning to end.
5. If a trail changes in classification (and/or in width) -**for at least 25 feet-** end/store the feature and start a new one.
***Note:** The trail classification (and/or width) must change for at least 25 ft., otherwise, keep the original classification/width.
5. Make sure you **collect at least one point at each bend/vertex** in the trail, as well as, at the start and end of the trail.
6. Map trails through disturbed areas and return later to map the disturbed area.
7. Refer to "Mapping Plan" for supplemental instructions.

BRAIDED TRAILS

For braided trails, first map the main trail and then map each braided segment.

1. To map the main trail, choose the feature "informal trail". Enter classification, trail width, rutting depth, number of braids, braided complex width, braided total exposed ground, and any notes.
2. After mapping the main trail, map each braided segment.
 1. Choose the feature "braided segment". Enter classification, trail width, rutting depth, and any notes.

Disturbed Area:

- A disturbed area is: A polygon-shaped high use area (typically a destination rather than a through route) as opposed to a trail.



- Enter the condition class for the disturbed area (stunted vegetation, some bare ground, or barren).
- If the disturbed area is made up of more than one smaller disturbed area with different condition classes, map these areas as separate polygons.
- Map all disturbed areas, regardless of size.
- You only need to collect points at the vertexes, not along the entire boundary line.
- Refer to "Mapping Plan" for supplemental instructions.

GPS Detailed Mapping Instructions:

- 1) Turn on GPS
- 2) Open TerraSync (double click)
- 3) Create a new File (create a new file at the beginning of each day)
 - a) Open the "Skyplot" (default) screen
 - b) Select "Status", from the drop-down menu.
 - c) Select "Data"
 - d) Hit "New" button
 - e) Leave file type as Rover
 - f) Use the keypad to name the new file
 - i) project name, meadow name, date mm/dd/yyyy data technician's initials (For example: ucm bv 06/02/2008 mj)
 - (1) Use these abbreviations for meadow or study area
 - (a) AHW= Ahwahnee Meadow
 - (b) BV= Bridalveil Meadow
 - (c) CKA= Cook's Meadow A
 - (d) CKB= Cook's Meadow B
 - (e) CKC= Cook's Meadow C
 - (f) EC= El Capitan Meadow
 - (g) LD= Leidig Meadow
 - (h) SENA= Sentinel Meadow A
 - (i) SENB= Sentinel Meadow B
 - (j) SLHA= Slaughterhouse Meadow A
 - (k) SLHB= Slaughterhouse Meadow B
 - (l) STNA= Stoneman Meadow A
 - (m) STNB= Stoneman Meadow B
- 4) Choose the appropriate data dictionary
 - a) Informal Trails (use this data dictionary for both YV and TM)
- 5) Log features
 - a) Once the file and data dictionary are open, Hit "Create".
 - i) Select the appropriate feature
 - (1) Informal Trail
 - (2) Disturbed Area
 - (3) Braided Segment
 - ii) Select the appropriate classification
 - (1) Stunted Vegetation
 - (2) Some Bare Ground
 - (3) Barren
 - iii) Select the appropriate trail width (in 6inch increments)
 - iv) Select the appropriate rutting depth (in 6 inch increments)
 - v) Select the number of braids
 - vi) Select the braided complex width
 - vii) Select the total exposed ground of the braided width
 - viii) Enter any notes necessary.
 - ix) Hit "Log"
- 6) Walk the feature, making sure the GPS is collecting points at least every 10m and at all vertexes. If not, **you must wait** until the point is collected.



- i) The GPS unit will beep and the point-count (in the upper right hand corner) will increase.
- 7) **Note:** If satellite coverage is sparse, and it is taking a long time to get points, you can start logging and then enter the feature fields as you are waiting in between points.

Editing GPS Data

1. Open Terra Sync.
2. Select and open the main file.
3. From the first tier, upper-left, drop-down menu, select "Data".
4. From the second tier, upper-left, drop-down menu, select "update features".
5. A list of all the features associated with the file will appear. Highlight and select (click once) the feature to be edited.
6. Click on the "begin" button.
7. When you have finished editing attributes, click "ok".
8. The list of features will again appear. Either edit more features, or click on the "update" button (on the top left).
9. To resume collecting data, select "collect"

Deleting GPS Data

1. Open Terra Sync.
2. Select and open the main file.
3. From the first tier, upper-left, drop-down menu, select "Data".
4. From the second tier, upper-left, drop-down menu, select "update features".
5. A list of all the features associated with the file will appear. Highlight and select (click once) the feature to be deleted.
6. Click on the "options" button.
7. Select "delete".
8. When you have finished deleting attributes, click "ok".
9. The list of features will again appear. Either delete more features, or click on the "update" button (on the top left).
10. To resume collecting data, select "collect"

Data Dictionary Fields

1. **Feature Type (Required)**
 - a) Informal Trail
 - b) Disturbed Area
 - c) Braided Segment
 - d) Point Generic
 - e) Line Generic
 - f) Area Generic
2. **Classification (Required)**
 - a) Stunted Vegetation
 - b) Some Bare Ground
 - c) Barren
3. **Trail Width (Required)**
 - a) From the drop-down menu, choose the trail width (to the nearest 6 inches).
4. **Rutting Depth (optional)**
 - a) From the drop-down menu, choose the rutting depth (to the nearest 6 inches).
5. **Braids, number of (optional, but required if the trail is braided)**
 - a) From the drop-down menu, choose the number of trails in the braided complex (this includes the main trail and the braided segments).
6. **BraidComplexWidth (optional, but required if it is a braided trail)**
 - a) From the drop-down menu, choose the braided complex width (to the nearest 6 inches).
Note: the braided complex is the set of braided trails. The braided complex width is the width of the complex from one side to the other.
7. **BraidTotTrldGrnd (optional, but required if it is a braided trail)**



- a) From the drop-down menu, choose the total width of trailed ground within the braided complex.
 1. To calculate the “braided total trailed ground” add the width of each braided segment trail.

Post-collection and processing: Each day following field work, technicians will return to the Vegetation and Restoration office to download the GPS (see “Downloading GPS” instructions), download photos, update photo-documentation and time spent records, and charge camera batteries.

End of season procedures: Following completion field work, data will be managed properly (see Data Management section), and a report will be compiled.

B.4.4 Data Management

Data entry:

- GPS data will be downloaded at the end of each day. No later than one week after downloading, GPS files will be differentially corrected. Corrected files will then be exported and converted to GIS shapefiles. The shapefiles will then be used to create maps and for analyzing purposes.
- Photos shall be downloaded and labeled following the photo documentation protocol as outlined in the “ThumbsPlus Step-By-Step User’s Guide. Photos will be stored following the “Photo Library File Structure Organizational Chart”. All photos shall follow the “Standard Operating Procedures for Assigning Image File Names”. The brief description, as part of the file name, should include the meadow name and the condition class. (e.g. YOSE-LeidigMeadowBarren-20070721.tif). Keywords and notes should also be assigned to all photos.
- Time spent will be entered into the “time spent” word file, with a description of the work completed that day.

Data analysis: GIS data will be converted into maps depicting informal trails in the areas being monitored. Calculations in ArcGIS 9 on informal trail features and meadow polygons will be completed to achieve informal trail density results.

Data reporting: Maps, informal trail density, and other data will be formalized in the 2007 VERP Report.

Data storage (meta-data): All GPS data (Trimble files) will be stored in ms01/EP Resources/Restoration Program Commons/GPS Data/VERP/2007/Informal Trails/Valley or Tuolumne. All GIS shapefiles will be stored in ms01/EP Resources/Restoration Program Commons/GIS Data/VERP/2007/Informal Trails/Valley or Tuolumne. All photos will be stored in ms01/EP Resources/00.Photo Library_RMS/Projects and Programs/Vegetation and Restoration/VERP. To follow the Resources Management and Science photo library file structure, all photos previously stored in ms01/EP Resources/Restoration Program Commons/VERP/2006/Informal Trails/Valley or Tuolumne/Photos will be moved to the aforementioned location.

B.4.5 Personnel Requirements and Training

Roles and responsibilities (tasks and time commitments):

- A Supervisory GS-7 will be responsible for the oversight of the Yosemite Valley and Tuolumne Meadows Informal Trails indicator. The duties will include: training of, managing, and supporting field technicians; attending monthly VERP team meetings; consulting with academic, agency, and other experts to further this indicator; assisting in analysis; and writing reports. They will serve as the point-of-contact, directly under the Branch Chief for this indicator.
- Assistant Supervisory GS-6 will be responsible for supporting the Supervisory GS-7. The duties will include: assisting the GS-7 with training of, managing, and supporting field technicians; attending monthly VERP team meetings; consulting with academic, agency, and other experts to further this indicator; assisting in analysis; and writing reports. They will serve as the point-of-



contact, directly under the GS-7 for this indicator. They will also serve as the point-of-contact and support person for the field technician.

- Field Technician will be responsible for data collection and some data entry. The duties will include: mapping the informal trails; downloading GPS files; creating maps; and maintaining accurate and complete records of field work.

Projected time commitments are as follows:

- Supervisory GS-7: one week for training assistant supervisor and field personnel; one week for refining protocol; three to four weeks for mapping trails in Tuolumne Meadows; 2.5 hours per month for team meetings; one week for participating in workgroups; and one to two weeks for report writing.
- Supporting GS-6: total of 4-6 hours per week of oversight of field technician; three to four weeks for monitoring informal trails in selected areas in Yosemite Valley; 2.5 hours per month for team meetings; one week for participating in workgroups; and one to two weeks for report writing.
- Field technician (i.e. Americorp intern): one week for monitoring informal trails in selected areas of Tuolumne Meadows; and one to two weeks for creating maps.

Qualifications:

- Supervisory GS-7 should be knowledgeable of the overall VERP program; the protocol specifics of the VERP Informal Trails Indicator; and condition class characteristics. They should be comfortable in a supervisory role and should have background in the natural sciences or resources/recreation management.
- The supporting GS-6 should have experience in the fields mentioned above, be able to communicate well, and be comfortable in a leadership position. They should also be prepared to assist and fill-in with the duties assigned to the Supervisory GS-7.
- The field technician should also have experience in the fields mentioned above, as well as, possess the ability to pay attention to detail, follow instructions, work independently, and be computer savvy. Ideally, they will have experience operating a GPS unit and related GIS computer software.

Training procedures: Experienced Vegetation and Restoration management staff, with professional knowledge of informal trail protocol and procedures, will be responsible for training non-experienced NPS staff, interns, and/or volunteers to bring their skills, ability and knowledge to a level that will allow them to monitor informal trails independently. NPS staff and volunteers will be required to demonstrate the ability to:

- Navigate to target sites at meadows
- Operate a GPS device
- Assign proper condition class and other trail attributes
- Download GPS data (see attached instructions)
- Document time spent and photos using the proper forms

These skills will be verified through field training and assistance from qualified Vegetation and Restoration Management staff.

B.4.6 Operational Requirements

Work plan: Protocol refinements conducted prior to field season in April, May, and June over a one-week total time period. Field work conducted Mid-July through mid-August in Yosemite Valley and in August in Tuolumne Meadows on the following schedule:

Yosemite Valley:

- Week 1 (field technician, GS-7 term, GS-6 seasonal): training and quality assurance



- Week 2-4 (GS-6 seasonal): mapping and assessments of informal trails and disturbed areas in Sentinel, Leidig, Stoneman, Ahwahnee, and Bridalveil meadows.
- Technician (AmeriCorps Intern): Creating maps conducted over a two-week time period following field work.
- GS-6 seasonal: Mapping and data reporting conducted over a two-week time period following field work.

Tuolumne Meadows:

- Week 1-2 (GS-7 term): mapping and assessments of informal trails between the Dana and Lyell forks of the Tuolumne River, near the high use zones and encompassed by the Tuolumne Development Concept Plan.
- Technician (AmeriCorps Intern): Creating maps conducted over a one-week time period following field work.
- GS-6 seasonal: Mapping and reporting will be conducted over a one-week time period following field work.

Safety: A job hazard analysis has been completed for this indicator. See table below (Table B.4.1).

Table B.4.1 Job Hazard Analysis for VERP Extent and Condition of Informal Trails

United States Department of Interior NATIONAL PARK SERVICE	1. WORK PROJECT/ACTIVITY	2. LOCATION	
		VERP Informal Trail Monitoring	Yosemite Valley and Tuolumne Meadows, YNP
Job Hazard Analysis (JHA)	3. NAME OF ANALYST	4. JOB TITLE	5. DATE PREPARED
		Crystal Elliot	Technician
6. TASKS/PROCEDURES	7. HAZARDS	8. ABATEMENTS ACTIONS ENGINEERING CONTROLS – SUBSTITUTION – ADMINISTRATIVE CONTROLS – PPE	
a. Driving to, from, and around sampling sites.	a. Collision resulting in damage, injury, or death.	a. Drive defensively, obey traffic laws, lights on, seatbelt on, be alert for pedestrians, wildlife, and distracted drivers. Know procedures for installing snow chains. Always carry and know how to use a Park radio.	
b. Hiking through and working in meadows.	b. Inclement weather, heat, dehydration; poison oak; insects and snakes.	b. Dress appropriately, drink plenty of fluids, bring snacks and/or meals if out during lunch hours, carry first-aid kit including snake-bite kit and Tecnu, in case of contact with poison oak. An Epi pen may be necessary to carry as well.	
c. Working and walking along riverbanks.	c. Tripping and/or falling due to wet and slippery rocks or sloping ground surfaces, contact with poison oak, etc.	c. Watch footing, know how to identify and avoid all poison oak, rinse immediately in stream if contact occurs.	



d. Working outdoors in hot, dry conditions.	d. Dehydration, heat exhaustion.	d. Stay hydrated. Take frequent breaks if weather is uncomfortably warm. Use sun protection (e.g. hat).
e. Working outdoors in cold and/or wet weather.	e. Hypothermia, reduced resistance to illness.	e. Stay dry. Use rubberized raingear if possible. Stay hydrated preferably with warm liquids. Stop work to warm up if necessary. Snack often.
10. SUPERVISORS SIGNATURE	11. TITLE	12. DATE



B.4.7. References

- Cole, D.N., A.E. Watson, T.E. Hall, and D.R. Spildie. 1997. *High-Use Destinations in Wilderness: Social and Biophysical Impacts, Visitor Responses, and Management Options*. Research Paper INT-RP-496. Ogden, UT: USDA Forest Service, Intermountain Research Station.
- Leung, Y.-F., N. Shaw, K. Johnson, and R. Duhaime. 2002. More than a database: Integrating GIS data with the Boston Harbor Islands carrying capacity study. *George Wright Forum* 19(1), 69-78.
- Marion, J. L. 1994. *An Assessment of Trail Conditions in Great Smoky Mountains National Park (Research/Resources Management Report)*. Atlanta, GA: USDI National Park Service, Southeast Region.
- Tyser, R.W., and C.A. Christopher. 1992. Alien flora in grasslands adjacent to road and trail corridors in Glacier National Park, Montana (U.S.A.). *Conservation Biology* 6(2), 253-262.
- Witztum, E.R., and D.A. Stow. 2004. Analyzing direct impacts of recreation activity on coastal sage scrub habitat with very high resolution multi-spectral imagery. *International Journal of Remote Sensing* 25(17), 3477-3496.
- YOSE (Yosemite National Park). 2005. *Merced River Monitoring 2005 Annual Report: User Capacity Management Program for the Merced Wild and Scenic River Corridor*. USDI National Park Service, Yosemite National Park.



B.5. WILDERNESS ENCOUNTERS

B.5.1. Background

The Wilderness Act of 1964 mandates that designated wilderness will have “outstanding opportunities for solitude.” While there is some disagreement about the value of monitoring encounters as a measure of wilderness experience quality (Stewart 2001; Cole, 1996), historically, wilderness managers have considered inter-group encounters as a primary threat to solitude (Watson 1998). In the most comprehensive study of visitor experience in the Yosemite Wilderness, Newman (Newman 2002) found encounters with other parties to be the second most important attribute affecting the quality of experience in a trade-off analysis.

This field protocol presents the procedures, data requirements and data collection sheets for the number of encounters Yosemite NP rangers or volunteers have with visitors on trails. The User Capacity Management Program identified two zones that should be monitored.

DESCRIPTION OF INDICATOR AND STANDARD:

Encounters with other parties gauges the density levels and flow rates of visitor use in designated wilderness areas.

Zones: Un-trailed; Trailed Travel

Standards:

- Zone 1A: Un-trailed—No more than one encounter per four hour period, 80 percent of the time.
- Zone 1B: Trailed Travel— No more than one encounter per hour, 80 percent of the time.

Rationale for indicator: Crowding and solitude are important components of wilderness experience. Numerous studies explore the effect of encounters in wilderness settings as they affect the nature of visitor’s experiences. Encounter rates are one vital part of the decision making matrix that would be used to review and possibly modify Yosemite’s current overnight wilderness use limits.

Objectives: To assess crowding and opportunities for solitude as a component of wilderness experience quality in the upper Merced River corridor.

B.5.2. Sampling Design

This data will be collected primarily by the Merced Lake Ranger. Sampling will attempt to mimic, as much as possible, the visitor’s experience, while recording the number of groups encountered. Data will be collected as part of routine patrols. Sampling times and locations will be dictated by patrol priorities rather than data needs. Temporal and spatial variation in data collection will be attained by combining several years’ data and filtering for a variety of spatial and temporal characteristics. If more people can be devoted to data collection, they will be assigned to mitigate any deficiencies that result from this type of opportunistic sampling.

Rationale for sampling design: Most research on wilderness encounters considers encounters per day. A minority of visitors stay in the river corridor the entire day, however, so encounters are recorded by trail segment, with sampling time in the segment noted. While a more robust schedule based on sampling priorities would obviously be preferable, funding and other operational limitations dictate that sampling must be coincident with ranger patrols.

Site selection: The sampling area includes all of zone 1A (un-trailed) and 1B (trailed) areas of the river corridor. A map of all indicator sampling locations is provided in the introduction to this field guide.



Trail segments sampled:

On trail (zone 1B):

- Moraine-Echo
- Echo-MLRS
- MLRS-Washburn
- Washburn-Junction

Off trail (zone 1A):

- Red Peak Fork
- Merced Peak Fork
- Lyell Fork
- South Fork.

Sampling Schedule: The Merced Lake Ranger typically patrols the upper Merced Drainage from late May (depending on snowpack) to early October, and performs eight to nine day patrols during each two week period. Much of June is spent training in the front country. Encounters will be recorded during regularly scheduled ranger patrols.

B.5.3 Field Methods

Data collection and measurement

- Data collectors should attempt to match their travel speed to that of a typical visitor, approximately two miles per hour.
- Whenever a data collector enters a new trail segment, the time will be recorded on the data sheet/index card. Any encounters within that zone will then be recorded. Staff should record an end time at the end of the zone or each time one needs to leave the trail to perform administrative duties.
- Data collectors will only count parties that are close enough to establish verbal or eye contact without leaving the trail. Parties camped close to the trail that can be seen and talked to from the trail will count. Each party will be counted only once, even if encountered multiple times. Parties found by leaving the trail to specifically look for campers or to perform other administrative tasks will not count. Other administrative parties (rangers, concession employees, etc.) will not be counted.
- If the data collector is unsure about whether individuals hiking separately are part of the same party, they will ask. This is already done as part of routine patrol.

When encounters with parties occur along a trail or are visible from the trail, record the following data on the data sheet provided:

- **Field Monitor Name(s):** Record field monitor name(s).
- **Date:** Day/Month/Year (August 8, 2008 = 08/08/08).
- **Start Time:** Record time entering trail segment or following a side trip off the trail.
- **End Time:** Record time leaving trail segment or when leaving trail.
- **Segment:** Record the trail segment number.
- **Number of Parties Encountered:** Record the number of parties encountered along segment of trail monitored.



B.5.4. Data Management

Data entry: All data will be entered into the Number of Encounters with other parties database.

Data analysis: Questions remain on the best method of analysis for this indicator. Most of these concern the difference between the units (encounters/day) used in most studies on the subject and the visitor use patterns found in zones 1A and 1B of the Merced River corridor: Most visitors spend only part of the day traveling in the sampling area. The best way to analyze the data to represent a visitor day across all temporal and spatial variables still needs to be decided.

Data reporting: Results from data analysis will be reported in the UCMMP annual report, at public meetings, and on the park website.

Data storage (meta data): Data will be stored in the wilderness patrol database.

B.5.5. Personnel Requirements and Training

Roles and responsibilities (tasks and time commitments): The Merced Lake Ranger will be the primary data collector. Other volunteers may be able to supplement this effort as available. Because this sampling occurs only during routine patrols; time commitment is minimal; training (1 hour), data transfer (10 minute/day), data entry (2-3 hours for the season), and debriefing (1 hour).

The Wilderness Specialist and UCMMP Staff will be responsible for training data collectors (1 hour), providing logistics for any volunteers (3 hours each), quality control (1 3 day visit to the sampling area), debriefing (1 hour), and data analysis (1 day).

Qualifications: Data collectors must be competent at living and traveling in a remote wilderness setting. They also need to be able to record data accurately and maintain records accordingly.

Training procedures: The Wilderness Specialist, UCMMP Manager, or Wilderness Rangers with experience in recording encounters with parties will be responsible for training any NPS staff or volunteers without prior monitoring experience. NPS staff and volunteers will be required to demonstrate the ability to:

- Adjust hiking speed to approximate the typical speed of a visitor. Typical hiking speed would be approximately 2 miles per hour.
- Make appropriate recordings of encounter data on ranger patrol card.
- Enter data into the Number of Encounters database.

B.5.6 Operational Requirements

Work plan: Sampling will take place during the summer season, approximately mid June through mid October.

Safety: The job hazard analysis for this indicator is the same as for routine wilderness patrol.



Table B.5.1 Job Hazard Analysis

United States Department of Interior NATIONAL PARK SERVICE	1. WORK PROJECT/ACTIVITY	2. LOCATION	
	UCMMP Wilderness Encounters	Yosemite Wilderness, YNP	
Job Hazard Analysis (JHA)	3. NAME OF ANALYST	4. JOB TITLE	5. DATE PREPARED
	Mark Fincher	Wilderness Mgr.	July, 2005
6. TASKS/PROCEDURES	7. HAZARDS	8. ABATEMENTS ACTIONS ENGINEERING CONTROLS – SUBSTITUTION – ADMINISTRATIVE CONTROLS – PPE	
a. Driving to, from, and around sampling sites.	a. Collision resulting in damage, injury, or death.	a. Drive defensively, obey traffic laws, lights on, seatbelt on, be alert for pedestrians, wildlife, and distracted drivers. Know procedures for installing snow chains. Always carry and know how to use a Park radio.	
b. Walking, hiking and other physical exertion.	b. Exhaustion, muscle strain, dehydration and fatigue.	b. Drink plenty of fluids, bring snacks and/or meals if out during lunch hours, Take periodic rests and stretch before and after physical activity.	
c. Hiking and camping in Wilderness.	c. Bite or attack from snakes, bees and or wildlife. Exposure to poison oak.	c. Use appropriate backcountry hiking and camping techniques. Use appropriate backcountry gear and clothing. Carry park radio and first aid kit. Leave travel itinerary with supervisor.	
d. Working outdoors in cold and/or wet weather.	d. Hypothermia, reduced resistance to illness.	d. Wear appropriate clothing and carry extra layers. Stay dry. Use rubberized raingear if possible. Stay hydrated preferably with warm liquids. Stop work to warm up if necessary. Snack often.	
e. Working outdoors in hot / extreme heat weather.	e. Fatigue, exhaustion, dehydration and heat stroke.	e. Wear appropriate clothing and use sunscreen. Drink fluids and snack throughout the day. Carry extra water and dehydration salts along with first aid kit.	
10. SUPERVISORS SIGNATURE	11. TITLE	12. DATE	

Equipment and materials:

- Pencils / sharpener
- Watch
- Datasheet.



B.5.7. References

- Cole, David N.; Stewart, William P. 2002. Variability of user-based evaluative standards for backcountry encounters. *Leisure Sciences* 24: 313-324
- Cole, David N.; Watson, Alan E.; Hall, Troy E.; Spildie, David R. 1996. High-use destinations in wilderness: social and biophysical impacts, visitor responses, and management options. INT-RP-496. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Research Station. 30 p.
- Newman, Peter. 2002. Integrating social, ecological, and managerial indicators of quality into carrying capacity decision making in Yosemite national Park wilderness.
- Stewart, William P.; Cole, David N. 2001. Number of encounters and experience quality in Grand Canyon backcountry; consistently negative and weak relationships. *Journal of Leisure Research* 33(1): 106-120
- Watson, Alan E.; Cronn, Rich; Christensen, Neal A. 1998. Monitoring inter-group encounters in wilderness. Res. Pap. RMRS-RP-14. Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station. 20 p.



B.6. Extent of Visitor Use

B.6.1 Background

The visitor use monitoring indicator will allow managers to assess use densities, durations, and activity types along the Merced and Tuolumne Rivers and high use trails. This indicator directly represents both the Recreation and Scenic Outstandingly Remarkable Value (ORV) but has correlation to all other values established for the river corridors. This indicator has been developed to assist in computer simulation outputs of people-at-one-time (PAOT) and people-per-viewscape (PPV) metrics. The rationale behind this change stemmed from the park's ability to gain more robust monitoring data through the implementation of a variety of methods to monitor visitor use while continuing to monitor PAOT/PPV through these established relationships.

Description of indicator and standard

Indicator: For the Merced River, visitor use monitoring serves as an extensive gauge of human use activity along the river. This indicator reflects human use levels and behaviors that may potentially cause negative impacts such as crowding, user conflict, noise and others visitor caused disturbances on both resources and the visitor experience. Visitor counts measures overall human use in the river corridor and helps to protect the Merced River's Outstandingly Remarkable Values.

River Standard: Methods alteration: Developing baseline

Trail Standard: Methods alteration: Developing baseline

Rationale for indicator: Documenting visitor use levels and their activities is an essential component of user capacity and related monitoring programs. Visitor Use monitoring serves as an indicator of overall use levels at points of interest including trails and in-river recreational users. Crowding and congestion have been shown to degrade the quality of visitor experiences (Manning 1999; Manning 2007) and can have a negative impact on park resources (Hammit and Cole 1998).

Trail and Attraction Site Use Monitoring

The 2008 field season is integrating additional ways of looking at this indicator. Aggregate counts, mode of travel (personal bike, rental bike, foot, rental raft, etc.) and travel routes are being monitored in the Happy Isles, Mirror Lake, Yosemite Falls, Bridalveil Fall, Tuolumne Meadows and Wapama Falls areas. On the trails, this allows for an increased understanding of overall use levels occurring along trail segments as opposed to the previously applied PAOT (People-At-One-Time) counts. However, PAOT is being continued along trail locations that are unable to be monitored using TrailMaster instrumentation. This was applied to areas where low use occurs as a way to substantiate trail selection for this season's installation of the monitoring devices.

Objectives: To document the levels and types of visitor use at key areas on the river banks, on trails, and at attraction sites within the Merced and Tuolumne River Corridors.

The overall change in methods for this indicator was determined to initiate a park-wide GIS layer documenting visitor use levels. This in turn can inform the entire UCMMP where the park is receiving specific levels of visitation. As UCMMP is a framework that outlines visitor-caused impacts on park resources, sampling locations for every indicator's data collection should span across use levels. Such sampling methods identify how resources are impacted by these various levels.

B.6.2 Sampling Design

Trail Sample:

The benefit received by using trail monitoring equipment this year is the depth of peak-season sample that can be obtained versus staffing this type of data collection. Except for uncontrollable equipment errors, sampling started on May 17th through September 30th.



Rationale for sampling design:

The visitor use indicator is designed to estimate the extent of visitors along trails, at attraction sites, and along river banks in the park. Since the number of people within a trail corridor influences Outstandingly Remarkable Values, both of these factors are addressed in this protocol. Monitoring will be conducted using a variety of sampling methodologies to obtain a representative and complete sample of visitor use across the days of the week and months during peak season from May through September. Six trails throughout Yosemite Valley, Tuolumne Meadows and Hetch Hetchy will be monitored. At each monitoring site the number of people walking along the river or hiking the trails will be analyzed. Counting periods for the high use trails will be stratified by time of day between 8:00 a.m. and 8:00 p.m. Trail monitor instrumentation allows for a continuous count of use regardless of time of day.

Measurement:

The measurement for visitor use along the trail will be the total number of people using the selected trails. These instruments are able to estimate the overall amount of use that the trail receives. Combined with calibration days (observation counts to determine a percent error due to shoulder-to-shoulder walking, fast-paced walking, stopping on or near the infrared beam, etc), the park is able to identify time specific use levels over a longer period of time than manual counts requiring extensive labor hours. In locations where counters are not able to be used, staff and volunteers performed manual counts to capture use levels.

Site selection (selection criteria and procedures):

- 1.) Monitoring Sites (Trail) – Trail selection was made as a result of the high use of these trails. The goal is to achieve a representative sample of a high use trails allowing for an estimate to be derived from this work. Additionally, many of these sites in Yosemite Valley were used in a visitor study conducted in 1998 (Manning et al. 1998) exploring for visitor's normative evaluations of PAOT encounters.

Sampling Schedule: Field work for this indicator will be conducted on mornings and afternoons for weekdays, weekends and holidays during peak season from May through September. Monday-Thursday constitutes weekdays, while Friday-Sunday constitutes weekend days. Trail use monitoring instrument validation will be rotated throughout the summer; this will consist of monitoring for four hours during each sample period. Sampling with the instrument are continuous throughout the season ensure a large sample to understand differences in hourly, daily, weekly, and seasonality in visitor use patterns.

B.6.3 Field Methods

Preparation: Field personnel should be trained (see Training guidelines section below) and the following required tools and supplies should be acquired.

- Map with location, photos and directions to monitoring sites
- Field Forms: Data sheets on waterproof paper
- Clipboard/pencils/pens
- Watch with second hand
- Counter
- Sunscreen/insect repellent/first aid kit
- Water.



Training outline: YOSE data collection staff training form

- Supplies from shipped boxes
- Study overview
 - Purpose
 - Study sites
 - Types of information
 - Modeling
- Sampling schedule
 - NPS and VPI staff
 - 7 hours of sampling, morning and evening study administration
- Logistics
 - Research supplies storage
 - Computer access
 - Transportation to and from study sites
 - Daily meeting time and location
 - With VPI too, after July 17
 - SCA housing?
 - VPI camping location
 - NPS research permit
- Survey instruments
 - Route surveys and survey logs, by location
 - Visitor counts forms, by location
 - Bridalveil Fall regression counts form
 - Site schematics
- Pocket PC's
 - Operation of each model
 - Name of each unit
 - Battery installation, battery life, and battery charging
 - Data entry
 - Event button and Pocket PC site legends
 - Naming files on Pocket PC
 - Data entry error log? (Make photocopies if more logs are needed)
 - Hardcopy forms for backup
 - Battery capacity, event counter capacity, mechanical issues
 - Data download and file organization
 - My Documents (Event Counter data files)
 - Program Files (Event Counter program)
 - Organizing and naming files on computer
- Daily routine
 - See handout
 - Organization is everything!
- Survey research
 - Consistency of administration is critical!
 - Response rates reflect data quality
 - Develop a good “come-on”
 - Clear, legible data recording key for data entry by other people
 - Observant to “problems” early in the study is important
 - Consult before revising methodology!
 - Organization is everything!
- Site visits and trials, Vernal Falls counts, Mirror Lake counts, Bridalveil Falls delays



Data collection: Data collection procedures for visitor use along the Merced River and high use trails and their methods are described below:

1) Monitoring

- Locate the trail monitor using map, directions and photos.
- Download the current data log from the monitor before initiating the calibration.
- Calibration of the trail monitor should take place in a location where arrivals and departures are clearly visible.
- The calibration should be hourly by intervals of 15 minutes.
- Record the proportions of inbound and outbound arrivals
- When the monitoring is complete, return all datasheets to the UCMMP Monitoring office.

2) Data Sheet

Figure B.6.1 PAOT (People at One time) and Aggregate Counts datasheet from the Twin Bridges-Tuolumne River (2008)

PAOT (People At One Time) And Aggregate Counts								
	DATE:					NAME:		
	TIME	From Campground	To Campground	From Trailhead	To Trailhead	From Backcountry	To Backcountry	PAOT-Twin Bridges
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								



Monitor Calibration Protocol:

- 1) Calibrations are set up as hour-long sampling periods, broken into four 15-minute sections. Each hour of calibration takes up four rows on the form. The “time start” and “time end” correlate with the four fifteen minute sections (ex. 8:00-8:15, 8:15-8:30, 8:30-8:45, 8:45-9:00). See figure B.6.2.
- 2) The unit number and date are recorded in their respective columns. Bridalveil is unit #5.
- 3) At the start and end of each 15 minute section, the monitor number displayed is recorded into the “monitor start” and “monitor end” columns respectively.
- 4) The “monitor count” column is “monitor end” minus “monitor start”.
- 5) For Bridalveil, use a single tally-clicker and count the number of people who hike the trail, both up and down. At the beginning of each 15 minute section, start the tally at zero and record the total count of that 15 minute section in the “total count” column.
- 6) When tallying with your clicker, count each person a total of two times, only once on the way up and once on the way down. This is important to know because if you see a person who checks out either of the monitor components and you notice that they trigger multiple monitor counts, you do not want to record on your clicker each count they make, only once on the way up and once down. Also, it is not necessary to stop the person from making multiple counts, as this is part of the natural error process, *unless* they are being destructive with the monitor.
- 7) *Calculating the R is not necessary*, as they are processed much easier in Excel, but for your understanding, the “R” column stands for rate of error and is found by dividing the total count by the monitor count. (ex. 75 total counts divided by 50 monitor counts equals 1.5, so for each monitor count there is actually 1.5 people passing).

Figure B.6.2 Visitor Monitoring Calibration Form

Monitor Number	Date	Start Time	End Time	Monitor Start	Monitor End	Total Count	Monitor Count	R = Rate of Error

Post-collection and processing: Datasheets in electronic form will be e-mailed to the UCMMP Office. Original datasheets (if manually completed) will then be copied and stored in the UCMMP program office in EI Portal.



B.6.4 Data Management

Data Entry: Collected data will be downloaded or transferred into the appropriate computer software (e.g. StatPack, Excel, etc).

Data analysis: Visitor use will be statistically analyzed via Statistical Package for the Social Sciences (SPSS) and incorporated into summary tables. Data should be presented by sampling location, date and time.

Data reporting: Visitor use along the two river corridors and trails within will be presented in the 2008 UCMMP Annual Report. More detailed reporting will be provided by the Cooperative Ecosystem Studies Unit as stated in the final agreements. Additionally, results will be applied to other aspects of park management.

Data storage: All collected data and compiled documentation will be stored on the YOSE NPS network (ms01/EP Commons/VERP/VERP Indicators/Visitor Use/Data). GIS maps and project files can be found at (ms01/ EP Commons/VERP/VERP Indicators/General/VERP Site Maps Compiled). Datasheets can be found at (ms01/ EP Commons/VERP/VERP Indicators/Visitor Use/Visitor Use Trail/Visitor Use Datasheet) and originals will be stored in the VERP office in EI Portal.

B.6.5 Personnel Requirements and Training

Roles and responsibilities (tasks and time commitments): Supervisory GS-7 responsible for oversight of field work and training of personnel not familiar with protocol and surveying. GS-7 field technician in charge of tasks associated with visitor use surveys and training and supervising other field staff. Other field staff will assist in surveying visitor use.

Projected personnel needs for visitor use monitoring locations are two to three personnel for 12 weeks including training throughout the summer. Additional time will be contributed by CESU. The river sites will require a total of six days and each day requiring six to eight hours to monitor. A total of 10 days and four hours will be needed to validate the trail monitors.

Qualifications: Data collectors must demonstrate the ability to accurately count the number of visitors, download data using the TrailMaster equipment, and efficiently conduct brief interviews with visitor groups. All data collectors will be required to work outdoors during inclement weather, stand for extended periods of time and may be required to hike or walk for long distances.

Staff Training: Two days will be dedicated to familiarizing field staff with data collection procedures and the overall purpose of the study. Formalizing this process ensures interviewer/data collector accuracy.

B.6.6 Operational Requirements

Work plan: Sampling will take place during the summer season from mid May to mid August. Trail data collection will continue throughout the summer and instrument calibration will rotate throughout this time.

Safety: A job hazard analysis has been completed and appears below (Table B.6.1).



Table B.6.1 Job Hazard Analysis for Extent of Visitor Use Data Collection

United States Department of Interior NATIONAL PARK SERVICE	1. WORK PROJECT/ACTIVITY	2. LOCATION	
	Visitor use Monitoring	Yosemite Valley, YNP	
Job Hazard Analysis (JHA)	3. NAME OF ANALYST	4. JOB TITLE	5. DATE PREPARED
	Bret Meldrum	Technician	May, 2008
6. TASKS/PROCEDURES	7. HAZARDS	8. ABATEMENTS ACTIONS ENGINEERING CONTROLS – SUBSTITUTION – ADMINISTRATIVE CONTROLS – PPE	
a. Driving to, from, and around sampling sites.	a. Collision resulting in damage, injury, or death.	a. Drive defensively, obey traffic laws, lights on, seatbelt on, be alert for pedestrians, wildlife, and distracted drivers. Know procedures for installing snow chains. Always carry and know how to use a Park radio.	
b. Walking, hiking and other physical exertion.	b. Exhaustion, muscle strain, dehydration and fatigue.	b. Drink plenty of fluids, bring snacks and/or meals if out during lunch hours, Take periodic rests and stretch before and after physical activity.	
c. Hiking through and working in meadows.	c. Inclement weather, heat, dehydration; poison oak; insects and snakes.	c. Dress appropriately, drink plenty of fluids, bring snacks and/or meals if out during lunch hours, carry first-aid kit including snake-bite kit and Tecnu, in case of contact with poison oak. An Epi pen may be necessary to carry as well.	
d. Working and walking along riverbanks.	d. Tripping and/or falling due to wet and slippery rocks or sloping ground surfaces, contact with poison oak, etc.	d. Watch footing, know how to identify and avoid all poison oak, rinse immediately in stream if contact occurs.	
e. Working outdoors in cold and/or wet weather.	e. Hypothermia, reduced resistance to illness.	e. Wear appropriate clothing and carry extra layers. Stay dry. Use rubberized raingear if possible. Stay hydrated preferably with warm liquids. Stop work to warm up if necessary. Snack often.	
f. Working outdoors in hot / extreme heat weather.	f. Fatigue, exhaustion, dehydration and heat stroke.	f. Wear appropriate clothing and use sunscreen. Drink fluids and snack throughout the day. Carry extra water and dehydration salts along with first aid kit.	
g. Hiking in Wilderness.	g. Bite or attack from snakes, bees and or wildlife. Exposure to poison oak.	g. Use appropriate backcountry hiking and camping techniques. Use appropriate backcountry gear and clothing. Carry park radio and first aid kit. Leave travel itinerary with supervisor.	
10. SUPERVISORS SIGNATURE	11. TITLE	12. DATE	

Equipment and materials:

- Map with location, photos and directions to monitoring sites
- Field Forms: Data sheets, route surveys, and smiley stickers
- Data Collectors-when downloading
- Clipboard/pencils/pens
- Watch with second hand (stopwatch optional).



- Hand Counter/PDA
- Sunscreen/insect repellent/first aid kit
- Water

Project Requirements:

<p>Data was collected by a variety of staff, interns and cooperative research groups.</p> <p>Virginia Tech Cooperative Agreement - Modeling and use counts at:</p> <ul style="list-style-type: none"> ▪ Mirror Lake ▪ Vernal Fall ▪ Bridalveil Fall ▪ Yosemite Falls ▪ El Capitan Meadow
<p>Colorado State University Cooperative Agreement - Visitor use estimation (trails) locations:</p> <ul style="list-style-type: none"> ▪ Yosemite Falls ▪ Bridalveil Fall ▪ Vernal Fall ▪ Glacier Point ▪ Hetch Hetchy ▪ Lyell Canyon ▪ Cathedral Lakes ▪ Glen Aulin
<p>Assistant Program Coordinator GS-7</p> <ul style="list-style-type: none"> ▪ One seasonal staff member to provide oversight ▪ Occasionally this position needed to collect data
<p>Student Conservation Association-Interns</p> <ul style="list-style-type: none"> ▪ Two interns from June to mid-September ▪ Responsibilities included conducting interviews, aggregate counts, data downloading, and instrument calibration.

B.6.7 References:

Hammit, W. and D. Cole (1998) Wildland Recreation. 2nd ed. John Wiley & Sons, Inc.

Manning, R., B. Wang, W. Valliere, and S. Lawson. 1998. Carrying Capacity Research for Yosemite Valley: Phase I Study. Burlington, Vermont: University of Vermont.

Manning, R., W. Valliere, S. Lawson, B. Wang, and P. Newman. 1999. Carrying Capacity Research for Yosemite Valley: Phase II Study. Burlington, Vermont: University of Vermont.

Manning R. (1999) Studies in Outdoor Recreation. 2nd ed. Oregon State University Press. OR. Corvallis.



B.7 Archeological Site Condition and Stability

B.7.1 Background

Problem statement

Archeological site condition has been selected as an indicator because the National Park Service (NPS) has a responsibility to protect non-renewable resources important to our nations' heritage such as archeological sites (see Directors Order # 28, National Historic Preservation Act, National Environmental Policy Act), and their status as contributors to the Cultural ORV for the Merced and Tuolumne Wild & Scenic River Corridors. These resources are also sensitive to visitor use as such use can negatively impact the stability and condition of archeological sites leading to a loss of archeological site significance, integrity, and the irretrievable loss of important data.

Despite the abundant applications of the adaptive management framework to natural resources, there is virtually no current application of this process on non-renewable resources such as archeological sites (see NPS 2000, 2001; Fairley and Downum 2000). Fundamentally, no decline in the condition of the data potential, significance, or integrity of cultural resources on the National Register of Historic Places (NRHP) or those eligible for inclusion in the NRHP is acceptable without working through a planning process such as the NEPA process.

The goal of this indicator is baseline condition assessments and monitoring of visitor impact data at a sample of archeological sites. The specific objectives for this project are to select a random sample of archeological sites, stratified by site-type vulnerability, complete site visits and collect visitor-use impact data.

This field guide presents the procedures, data requirements, and data collection sheets for conducting use impact monitoring on archeological sites throughout Yosemite National Park.

Description of indicator and standard

Indicator: Archeological Site Condition

Standard: Not yet developed; however, we propose a single standard: no deterioration in site stability or condition related to visitor threats or disturbances. No new visitor related (including park management actions related to visitor use) threats or disturbances to archeological sites that have the potential to degrade stability or condition. No change in condition from baseline to current as a result of visitor use.

Zone(s): Low Use and High Use, Merced and Tuolumne Wild and Scenic River corridors.

Rationale for indicator: Archeological sites are important park resources that are sensitive to visitor use and other types of impacts. These resources exist throughout the park and generally are present on the ground surface in areas not restricted from public use. These resources are sensitive to trampling, soil compaction, vegetation loss, unauthorized collection, and a myriad of other results of visitor use activities. Given the non-renewable nature of archeological resources, the adaptive management process requires some adaptation to provide a meaningful framework to address standards and monitoring protocols for these resources. We propose supplementing traditional user capacity parameters (those geared toward daily wear and tear from use) with parameters that represent serious and real threats and disturbances to the integrity and significance of archeological resources (including episodic abuse). We propose to develop protocols specifically geared toward the collection and analysis of visitor-use data.

Objectives:

The objectives of this program are to document the extent of visitor-use impacts at a sample of archeological sites, and to monitor for changes from impacts relative to visitor use at a sample of archeological sites that

User Capacity Management Monitoring Program Field Guide 2008



were assessed in the 2007 field season. Through comparison of visitor-caused disturbances and deterioration/change from base line data, problem areas can be identified and management actions, such as, but not limited to: stabilization, data recovery, restoration, and/or access limitations (trail obliteration etc.), can be taken to prevent further site destabilization.

B.7.2 Sampling Design

Rationale for sampling design:

The sampling regime for the 2008 field season is being designed to inventory change in archeological site stability and condition. Since this is the second year in a pilot study, sampling will take place for the current field season, and the suitability of this system will be evaluated. Until such time as a more appropriate minimum standard is established, no visitor use related degradation in archeological site condition will be the minimum acceptable standard used.

Sample locations will be based on a random sample stratified by site type vulnerabilities (high and low) within the Tuolumne and Merced Wild and Scenic River corridors. The sample will be drawn from the population of all previously recorded archeological sites within the two river corridors.

Sampling Schedule:

Sampling will take place during July, August, and September of the 2008 summer field season.

Site selection (selection criteria and procedures):

Current site documentation is conducted on an opportunistic basis, as provided for by non-routine and special-funded projects; it is impossible to visit all sites regularly due to the lack of funding for this activity. Therefore, a sample of sites will be chosen stratified by site type vulnerability along the Merced and Tuolumne Wild and Scenic River corridors. A list of sites selected is presented in Table 1. The objectives for the 2008 field season are to collect baseline data on a sample of newly selected archeological sites, and to monitor for changes in site condition at a sample of sites visited in the 2007 field season. A long term objective is to develop protocols for quantitative, systematic, and regularly-scheduled site condition assessments focused on visitor use-impacts to archeological sites.

B.7.3 Field Methods

Preparation: Field personnel should be trained (see Training, below) and the following required tools and supplies should be acquired.

- Copy of the most current ASMIS site report
- Most current site forms and map with location/directions to target sites
- Compass
- Blank ASMIS field form and cheat sheet
- Graph paper for mapping and blank paper for notes.
- Clipboard/pencils
- GPS Unit
- Camera
- Visitor Use Impact Monitoring field form and user guide versions 2008.



Data collection and measurement:

Complete the Visitor Use Impact Site Monitoring field form (Figure 1) at every archeological site chosen to assess in the project area. Impact data to be collected include artifact collection piles, presence of indicators of camping on site, trails on or near site boundaries, etc. Additionally, some collateral indicators (such as soils compaction, vegetation damage, and erosion) will be monitored that can give crucial information for determining archeological resource condition before there is inherent damage to archeological resources.

Data from these field monitoring forms will be entered into a standard, relational use database using the protocol outlined below upon return to the office. Original field forms will be stored with individual projects and archived upon project completion.



Figure B.7.1: DRAFT Yosemite Visitor Use Impact Site Monitoring field form.

Park Management / Basics

Trinomial: CA-		Temp No. YOSE
Recorder:		Monitor Date:
ASMIS Site Condition Previous		ASMIS Site Condition Current
Landform	Depositional Setting	Site Type:
Est. Data Potential	Field-checked Data Potential	
Est. Vulnerability	Field-checked Vulnerability	

National Register Evaluation: Site is significant under what Criteria?

- A - Association with important event
- B - Association with an important individual
- C - Illustrates particular architectural/construction technique
- D - Significant information or research potential

Integrity

What are most important aspects of integrity that convey the site's significance? Rank in order of importance if >1.

- ___ **Location:** where property was constructed or place where event took place
- ___ **Design:** conscious decisions made during the original conception and planning of a property, elements of form, plan, space, and style. Combination of elements that create the form, plan, space, structure, and style of the property, patterning of structures, activity areas, etc relative to on another, or intrasite artifact/feature patterning
- ___ **Setting:** physical environment of property, includes elements like topographic features, open spaces, viewshed.
- ___ **Materials:** physical elements (artifacts, structures) combined to form a property, elements combined or deposited during particular period of time and in a particular pattern or configuration. Described in terms of intrusive artifacts/features, completeness of artifact or feature assemblage, quality of artifact or feature preservation.
- ___ **Workmanship:** physical evidence of craftsmanship or a particular culture's evidence of labor or skill of a particular culture or people during a time period. Indirectly, quality of artifacts or architectural features, skill needed to produce artifact or construct feature
- ___ **Feeling:** Property's expression of the aesthetic or historic sense of a particular period of time, features in combination with setting convey a historic sense of property's ability to convey its significance.
- ___ **Association:** direct link between an important event or person and the property, strength of association between data and the research question, if activity occurred and is sufficiently intact to convey that relationship to an observer.
- ___ **Information Potential:** important, significant information potential

Public Access

Nearest Public Access: *(describe)*
 How close is the nearest Access Point?
 < 100m = 3 points 100-500 m = 2 points 500-1000m = 1 point > km = 0 points

Visible Features

Does site have rock art? Yes = 1 No = 0 Visible Features? Yes = 1 No = 0 Total
 Score:
 Describe:

Natural Impacts - impacting arch. feature or site integrity or exacerbated by visitor impacts

- Erosion Bioturbation Rock Fall Tree Fall Flooding Other



Human/Visitor Use Impacts

Types of Use - Direct	
<input type="checkbox"/> Camping <input type="checkbox"/> Hiking <input type="checkbox"/> Climbing/Bouldering <input type="checkbox"/> River Recreation <input type="checkbox"/> Sightseeing <input type="checkbox"/> Picnicking <input type="checkbox"/> Other <input type="checkbox"/> None <input type="checkbox"/> Park Operations	
Types of Use - Secondary	
<input type="checkbox"/> Camping <input type="checkbox"/> Hiking <input type="checkbox"/> Climbing/Bouldering <input type="checkbox"/> River Recreation <input type="checkbox"/> Sightseeing <input type="checkbox"/> Picnicking <input type="checkbox"/> Other <input type="checkbox"/> None <input type="checkbox"/> Park Operations	
Artifact Collection Piles: <input type="checkbox"/> None <input type="checkbox"/> One <input type="checkbox"/> More than one	
Describe Contents:	
Social (informal) Trails present on site: <input type="checkbox"/> None <input type="checkbox"/> One or Two <input type="checkbox"/> More than two	
Characterize each trail as follows:	
faint (not compacted) distinct (bare ground visible, compacted) eroding channeling water	
Trail 1	Trail 2 Trail 3 Trail 4
Evidence of recent camping: If you notice any of these on the site but not as a result of camping, score anyway and notate	
<input type="checkbox"/> Firing, scar, pit, or charcoal <input type="checkbox"/> Soil Compaction <input type="checkbox"/> Vegetation Damage <input type="checkbox"/> Rearrangement of Rocks <input type="checkbox"/> Trash <input type="checkbox"/> Rearrangement/modification of Features <input type="checkbox"/> Other:	
Evidence of Facilities Impacts as a result of visitor use:	
<input type="checkbox"/> Wilderness restoration activities <input type="checkbox"/> Stock use <input type="checkbox"/> Trails work <input type="checkbox"/> Utilities/infrastructure construction	
Evidence of <i>deliberate</i> vandalism/ARPA violation? (not just missing artifacts)	
<input type="checkbox"/> none, <input type="checkbox"/> slight, minor graffiti, shallow test hole, <input type="checkbox"/> substantial rock art vandalism, major digging	
Is Vandalism new: <input type="checkbox"/> no <input type="checkbox"/> yes	

Monitoring Priority

List Total Scores From	Score
Total Impact Scores	_____
Public Access Score	_____
Visible Features Score	_____

Total Score: _____

Use the above Total Score to evaluate the Monitoring Priority Schedule:

	Score	Schedule
<input type="checkbox"/>	1-4 points	Monitor every 15 years
<input type="checkbox"/>	5-8 points	Monitor every 10 years
<input type="checkbox"/>	9-12 points	Monitor every 5 years
<input type="checkbox"/>	13+ points	Monitor once per year

Give a brief overview narrative of the site, disturbances, condition, and recommendations:



Activity/Process:		<input type="checkbox"/> Threat <input type="checkbox"/> Disturbance		Ftr/Site Area:	
Effect on Integrity	Effect of Resource (weight)	Effect Level (site area)	Score	Threat Time Frame (weight)	
<input type="checkbox"/> Removal of Archeological Matrix (3) <input type="checkbox"/> Removal of Ftr/Artifact/Element (3) <input type="checkbox"/> Destabilization of Ftr/Element (3) <input type="checkbox"/> Destruction of Ftr/Artifact/ Element (3) <input type="checkbox"/> Displacement of Ftr/Artifact/Element (3) <input type="checkbox"/> No Effect <input type="checkbox"/> Other	<input type="checkbox"/> Negligible <input type="checkbox"/> Partial Loss: Repairable (2) <input type="checkbox"/> Partial Loss: Irretrievable (3) <input type="checkbox"/> Total Loss: Irretrievable (4)	<input type="checkbox"/> Low (<15%) <input type="checkbox"/> Moderate (15-50%) <input type="checkbox"/> Severe (>50%) <input type="checkbox"/> Destroyed <input type="checkbox"/> Undetermined	1 2 3 4	<input type="checkbox"/> Immediate (2) <input type="checkbox"/> 1 year <input type="checkbox"/> 3 Years <input type="checkbox"/> 5 Years <input type="checkbox"/> 10 Years <input type="checkbox"/> 20 Years <input type="checkbox"/> Undetermined	
Treatment Recommended					
<input type="checkbox"/> Intensive Monitor <input type="checkbox"/> Data Recovery <input type="checkbox"/> Close Area <input type="checkbox"/> Undetermined	<input type="checkbox"/> Vegetation Planting <input type="checkbox"/> NRHP Evaluation <input type="checkbox"/> Wilderness Restoration <input type="checkbox"/> Other	<input type="checkbox"/> Vegetation Removal <input type="checkbox"/> Test Site <input type="checkbox"/> Re-route Trail <input type="checkbox"/> Stabilize Ftr/Matrix/Element	<input type="checkbox"/> Hazard Fuel Removal <input type="checkbox"/> Protection <input type="checkbox"/> Obscure Trail <input type="checkbox"/> Collect Surface Artifacts	<input type="checkbox"/> Update Map <input type="checkbox"/> Close site <input type="checkbox"/> Erosion Control <input type="checkbox"/> None	
Impact Score: (weighted appropriately)					

Activity/Process:		<input type="checkbox"/> Threat <input type="checkbox"/> Disturbance		Ftr/Site Area:	
Effect on Integrity	Effect of Resource (weight)	Effect Level (site area)	Score	Threat Time Frame (weight)	
<input type="checkbox"/> Removal of Archeological Matrix (3) <input type="checkbox"/> Removal of Ftr/Artifact/Element (3) <input type="checkbox"/> Destabilization of Ftr/Element (3) <input type="checkbox"/> Destruction of Ftr/Artifact/ Element (3) <input type="checkbox"/> Displacement of Ftr/Artifact/Element (3) <input type="checkbox"/> No Effect <input type="checkbox"/> Other	<input type="checkbox"/> Negligible <input type="checkbox"/> Partial Loss: Repairable (2) <input type="checkbox"/> Partial Loss: Irretrievable (3) <input type="checkbox"/> Total Loss: Irretrievable (4)	<input type="checkbox"/> Low (<15%) <input type="checkbox"/> Moderate (15-50%) <input type="checkbox"/> Severe (>50%) <input type="checkbox"/> Destroyed <input type="checkbox"/> Undetermined	1 2 3 4	<input type="checkbox"/> Immediate (2) <input type="checkbox"/> 1 year <input type="checkbox"/> 3 Years <input type="checkbox"/> 5 Years <input type="checkbox"/> 10 Years <input type="checkbox"/> 20 Years <input type="checkbox"/> Undetermined	
Treatment Recommended					
<input type="checkbox"/> Intensive Monitor <input type="checkbox"/> Data Recovery <input type="checkbox"/> Close Area <input type="checkbox"/> Undetermined	<input type="checkbox"/> Vegetation Planting <input type="checkbox"/> NRHP Evaluation <input type="checkbox"/> Wilderness Restoration <input type="checkbox"/> Other	<input type="checkbox"/> Vegetation Removal <input type="checkbox"/> Test Site <input type="checkbox"/> Re-route Trail <input type="checkbox"/> Stabilize Ftr/Matrix/Element	<input type="checkbox"/> Hazard Fuel Removal <input type="checkbox"/> Protection <input type="checkbox"/> Obscure Trail <input type="checkbox"/> Collect Surface Artifacts	<input type="checkbox"/> Update Map <input type="checkbox"/> Close site <input type="checkbox"/> Erosion Control <input type="checkbox"/> None	
Impact Score: (weighted appropriately)					



Activity/Process: Threat Disturbance Ftr/Site Area:

Effect on Integrity	Effect of Resource (weight)	Effect Level (site area)	Score	Threat Time Frame (weight)
<input type="checkbox"/> Removal of Archeological Matrix (3) <input type="checkbox"/> Removal of Ftr/Artifact/Element (3) <input type="checkbox"/> Destabilization of Ftr/Element (3) <input type="checkbox"/> Destruction of Ftr/Artifact/ Element (3) <input type="checkbox"/> Displacement of Ftr/Artifact/Element (3) <input type="checkbox"/> No Effect <input type="checkbox"/> Other	<input type="checkbox"/> Negligible <input type="checkbox"/> Partial Loss: Repairable (2) <input type="checkbox"/> Partial Loss: Irretrievable (3) <input type="checkbox"/> Total Loss: Irretrievable (4)	<input type="checkbox"/> Low (<15%) <input type="checkbox"/> Moderate (15-50%) <input type="checkbox"/> Severe (>50%) <input type="checkbox"/> Destroyed <input type="checkbox"/> Undetermined	1 2 3 4	<input type="checkbox"/> Immediate (2) <input type="checkbox"/> 1 year <input type="checkbox"/> 3 Years <input type="checkbox"/> 5 Years <input type="checkbox"/> 10 Years <input type="checkbox"/> 20 Years <input type="checkbox"/> Undetermined
Treatment Recommended				
<input type="checkbox"/> Intensive Monitor <input type="checkbox"/> Data Recovery <input type="checkbox"/> Close Area <input type="checkbox"/> Undetermined	<input type="checkbox"/> Vegetation Planting <input type="checkbox"/> NRHP Evaluation <input type="checkbox"/> Wilderness Restoration <input type="checkbox"/> Other	<input type="checkbox"/> Vegetation Removal <input type="checkbox"/> Test Site <input type="checkbox"/> Re-route Trail <input type="checkbox"/> Stabilize Ftr/Matrix/Element	<input type="checkbox"/> Hazard Fuel Removal <input type="checkbox"/> Protection <input type="checkbox"/> Obscure Trail <input type="checkbox"/> Collect Surface Artifacts	<input type="checkbox"/> Update Map <input type="checkbox"/> Close site <input type="checkbox"/> Erosion Control <input type="checkbox"/> None
Impact Score: (weighted appropriately)				

Activity/Process: Threat Disturbance Ftr/Site Area:

Effect on Integrity	Effect of Resource (weight)	Effect Level (site area)	Score	Threat Time Frame (weight)
<input type="checkbox"/> Removal of Archeological Matrix (3) <input type="checkbox"/> Removal of Ftr/Artifact/Element (3) <input type="checkbox"/> Destabilization of Ftr/Element (3) <input type="checkbox"/> Destruction of Ftr/Artifact/ Element (3) <input type="checkbox"/> Displacement of Ftr/Artifact/Element (3) <input type="checkbox"/> No Effect <input type="checkbox"/> Other	<input type="checkbox"/> Negligible <input type="checkbox"/> Partial Loss: Repairable (2) <input type="checkbox"/> Partial Loss: Irretrievable (3) <input type="checkbox"/> Total Loss: Irretrievable (4)	<input type="checkbox"/> Low (<15%) <input type="checkbox"/> Moderate (15-50%) <input type="checkbox"/> Severe (>50%) <input type="checkbox"/> Destroyed <input type="checkbox"/> Undetermined	1 2 3 4	<input type="checkbox"/> Immediate (2) <input type="checkbox"/> 1 year <input type="checkbox"/> 3 Years <input type="checkbox"/> 5 Years <input type="checkbox"/> 10 Years <input type="checkbox"/> 20 Years <input type="checkbox"/> Undetermined
Treatment Recommended				
<input type="checkbox"/> Intensive Monitor <input type="checkbox"/> Data Recovery <input type="checkbox"/> Close Area <input type="checkbox"/> Undetermined	<input type="checkbox"/> Vegetation Planting <input type="checkbox"/> NRHP Evaluation <input type="checkbox"/> Wilderness Restoration <input type="checkbox"/> Other	<input type="checkbox"/> Vegetation Removal <input type="checkbox"/> Test Site <input type="checkbox"/> Re-route Trail <input type="checkbox"/> Stabilize Ftr/Matrix/Element	<input type="checkbox"/> Hazard Fuel Removal <input type="checkbox"/> Protection <input type="checkbox"/> Obscure Trail <input type="checkbox"/> Collect Surface Artifacts	<input type="checkbox"/> Update Map <input type="checkbox"/> Close site <input type="checkbox"/> Erosion Control <input type="checkbox"/> None
Impact Score: (weighted appropriately)				

Activity/Process: Threat Disturbance Ftr/Site Area:

Effect on Integrity	Effect of Resource (weight)	Effect Level (site area)	Score	Threat Time Frame (weight)
<input type="checkbox"/> Removal of Archeological Matrix (3) <input type="checkbox"/> Removal of Ftr/Artifact/Element (3) <input type="checkbox"/> Destabilization of Ftr/Element (3) <input type="checkbox"/> Destruction of Ftr/Artifact/ Element (3) <input type="checkbox"/> Displacement of Ftr/Artifact/Element (3) <input type="checkbox"/> No Effect <input type="checkbox"/> Other	<input type="checkbox"/> Negligible <input type="checkbox"/> Partial Loss: Repairable (2) <input type="checkbox"/> Partial Loss: Irretrievable (3) <input type="checkbox"/> Total Loss: Irretrievable (4)	<input type="checkbox"/> Low (<15%) <input type="checkbox"/> Moderate (15-50%) <input type="checkbox"/> Severe (>50%) <input type="checkbox"/> Destroyed <input type="checkbox"/> Undetermined	1 2 3 4	<input type="checkbox"/> Immediate (2) <input type="checkbox"/> 1 year <input type="checkbox"/> 3 Years <input type="checkbox"/> 5 Years <input type="checkbox"/> 10 Years <input type="checkbox"/> 20 Years <input type="checkbox"/> Undetermined
Treatment Recommended				
<input type="checkbox"/> Intensive Monitor <input type="checkbox"/> Data Recovery <input type="checkbox"/> Close Area <input type="checkbox"/> Undetermined	<input type="checkbox"/> Vegetation Planting <input type="checkbox"/> NRHP Evaluation <input type="checkbox"/> Wilderness Restoration <input type="checkbox"/> Other	<input type="checkbox"/> Vegetation Removal <input type="checkbox"/> Test Site <input type="checkbox"/> Re-route Trail <input type="checkbox"/> Stabilize Ftr/Matrix/Element	<input type="checkbox"/> Hazard Fuel Removal <input type="checkbox"/> Protection <input type="checkbox"/> Obscure Trail <input type="checkbox"/> Collect Surface Artifacts	<input type="checkbox"/> Update Map <input type="checkbox"/> Close site <input type="checkbox"/> Erosion Control <input type="checkbox"/> None
Impact Score: (weighted appropriately)				



Add up all Impact Scores:	Points	Impact Category	Total Impact Score	
	0	<input type="checkbox"/> No Impact	0	
	1-5	<input type="checkbox"/> Minimal	2	
	6-10	<input type="checkbox"/> Moderate	4	
	11-15	<input type="checkbox"/> Severe	6	
	>15	<input type="checkbox"/> Destroyed	8	



Table B.7.1. Archeological Sites Selected to Assess FY 2008.

Merced River Corridor High Vulnerability sites (n=21)	Merced River Corridor Low Vulnerability sites (n=11)	Tuolumne River Corridor High Vulnerability sites (n=14)	Tuolumne River Corridor Low Vulnerability sites (n=12)
CA-MRP-008 CA-MRP-240/303 CA-MRP-190/191 CA-MRP-1806H CA-MAD-2362 CA-MAD-2364 CA-MRP-1721/H CA-MRP-159 CA-MRP-76 CA-MRP-82/H CA-MRP-1833 CA-MRP-320/H CA-MRP-304/H CA-MRP-163 CA-MRP-15 CA-MRP-173/327/H CA-MAD-2296 CA-MAD-2363 CA-MRP-55/H CA-MRP-1314 CA-MRP-308	CA-MRP-3300 P-22-001646 CA-MRP-1713H CA-MRP-216 P-22-001648 CA-MRP-218 CA-MRP-63 CA-MRP-733 CA-MRP-208 YOSE2000-I-05 CA-MRP-289	CA-TUO-3845 YOSE1992-E-01 CA-TUO-4902/H CA-TUO-2828 CA-TUO-3944 CA-TUO-3836 CA-TUO-4436 CA-TUO-150 CA-TUO-4435 CA-TUO-111 CA-TUO-2834 CA-TUO-500 CA-TUO-3937/H CA-TUO-3823	CA-TUO-3844 CA-TUO-501 CA-TUO-507 CA-TUO-2814/H CA-TUO-3830 YOSE1994-O-03 CA-TUO-4640 CA-TUO-2809 CA-TUO-119 CA-TUO-3848 CA-TUO-4663 CA-TUO-4904H



Post-collection and processing:

Data gathered in the field will be entered into the appropriate databases, digital photographs will be processed according to Yosemite Archeology Office standards, a summary report will be written (to be included in the 2008 User Capacity Annual Summary Report), and the entirety of the project will be archived according to Yosemite Museum standards and guidelines.

B.7.4 Data Management

Each archeological site visit will generate field forms. All this information must be stored in a convenient and secure manner. All of the metadata will be stored in the Visitor Use Impact Monitoring database. Field forms will be archived at the end of each project.

Data entry:

Upon return to the office, each field form will be entered into the appropriate database. Existing ASMIS records will be updated accordingly. New records will be entered as is consistent with NPS ASMIS guidelines and procedures (see NPS 2007), and visitor-use impact data will be entered according to established guidelines. Photographs will be downloaded according to office standards and site sketch maps will be digitized.

Data analysis and reporting:

Summary statistics (mean, standard deviation, min, max) will be prepared for the impact categories measured, such as collection piles, camping impacts on sites, etc. The summary data will be reported as a part of the User Capacity Annual report. Preliminary recommendations will be made where field data indicate the draft standard has been exceeded. Additionally, a specific report will be completed and archived according to the standards and guidelines provided in the *Yosemite Archeology Office Guidelines For Survey and Reporting* (NPS 2002).

Data storage:

All collected data will be stored in the Archeology-Visitor Use Monitoring database located on NPS servers. Original datasheets will be archived with other original paperwork from this project. Printed ASMIS reports for each visited site will be kept on file with each site record at the Yosemite Archeology Office.

B.7.5 Personnel Requirements and Training

Roles and Responsibilities (tasks and time commitments):

Yosemite National Park, through the Division of Resources Management and Science will be responsible for the administration of this indicator monitoring plan. Management of this project will be conducted by the Branch Chief (or designated project lead) of Anthropology and Archeology within the Division of Resources Management and Science. Responsibilities are:

- Training of field personnel
- Review of data and procedures
- Maintenance of data, field forms, equipment repair and maintenance logs, and updating protocols

Data collection will be performed by qualified archeologists and archeological technicians, meeting OPM standards. Individuals will be trained in archeological site documentation, ASMIS condition assessments, and the resources and material types common to archeological sites in the park.



As each new or returning technician enters on duty, they should receive comprehensive training on field and office procedures, including both Visitor Use Impact and ASMIS databases.

At the end of each fiscal year, the project manager should review the data and procedures. This will be done in conjunction to ASMIS federal reporting requirements. This information, coupled with discussions with field staff, will be used to review or modify procedures, reevaluate the system, and to improve data quality.

Training procedures:

Each technician collecting monitoring field data must have demonstrated the following:

- The ability to prepare complete and accurate field forms.
- The ability to enter in field form information into the ASMIS and Visitor Use databases.
- A safety conscious approach to field work.
- Knowledge of proper archeological documentation procedures.
- Proficiency with identifying and recording archeological sites

Volunteers:

Volunteers can not be currently used for ASMIS documentation or visitor-use impact monitoring due to requirements of the ASMIS/Archeology program. However, some aspects of site monitoring and visitor use data collection may be accomplished using volunteers, similar to site stewardship programs in other NPS units and state programs.

B.7.6 Operational Requirements

Work plan:

A sample of previously recorded archeological sites within both river corridors will be drawn. Once the sample of sites is selected, site assessments will begin. A visitor use impact site monitoring field form will be filled out at each site, as well as a current ASMIS condition assessment. This data will be entered into the visitor use impact database and the ASMIS database, and analyzed according to the guidelines in the *Archeological Site Condition Indicator Research Design* (Middleton 2008).

Safety:

A job hazard analysis (JHA) has been completed for front and back country archeological survey and monitoring (Appendix A). This document will be reviewed and discussed with all project participants prior to start of fieldwork, and periodically throughout the field season. Similarly, the JHA for data entry and general office work will be reviewed prior to the start of data input, processing and reporting.

Equipment and materials:

All equipment and materials are stored with RMS. Each project archeologist is responsible for making sure that adequate supplies are available and in working order prior to each field recording.

Budget:

The budget for fiscal year 2008 is a component of the overall FY08 User Capacity Monitoring program funds.



B.7.7 References

Fairly, Helen C. and Christian Downum

2000 *Evaluating Elements of Archeological Site Integrity to Determine Limits of Acceptable Change: A Case Study at Wupatki National Monument, Arizona*. On file at USDI, National Park Service, Wupatki National Monument, Arizona.

Middleton, J.

2008 *Research Design for the 2008 Field Season of Archeological Site Condition, a Resource Indicator under the Yosemite User Capacity Monitoring Program. Yosemite National Park, California (YOSE 2008G) Draft*. U.S. Department of the Interior, National Park Service, Yosemite National Park, California.

National Park Service

2000 *Workshop on Application of Visitor Carrying Capacity Frameworks to Management and Protection of Non-Renewable Resources*. USDI, National Park Service, Flagstaff Area National Monuments, Arizona.

2001 *Second Workshop on the Application of the VERP Framework to Management and Protection of Non-Renewable Resources: The Development of Indicators and Standards for Archeological Resources*. National Park Service, Flagstaff Area National Monuments, Arizona.

2002 *Yosemite Archeology Office Guidelines for Survey and Reporting*. Yosemite Archeology Office. National Park Service, Yosemite National Park, California.

2007 *ASMIS 3.01: Archeological Sites Management Information System, version 3.01. Data Dictionary*. Archeology Program, Park Cultural Resources Programs, U.S. Department of the Interior, National Park Service, Washington, D.C.



Appendix A.

YOSEMITE NATIONAL PARK

JOB SAFETY ANALYSIS FORM

JOB/ACTIVITY: Backcountry Survey

RAC:

DATE REVISED: 01/09/07

PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
1. Travel in backcountry location	A. Physical fitness	<ul style="list-style-type: none"> i. Conduct orientation with crew to ascertain any relevant medical history, training, and skill level ii. Stretch before and after any strenuous activity
	B. Group Backcountry Travel	<ul style="list-style-type: none"> i. Scope and plan route - discuss hazards prior to trip ii. Make map of route (recommended to leave a copy if travel involves a complicated route and/or cross country travel) iii. Complete backcountry travel plan iv. Arrange a designated point of contact (POC) for the duration of your trip v. Notify POC of trailhead parking area you will be utilizing vi. All persons must carry a map and compass and know how to use them vii. Project Lead must carry a radio with spare batteries (it is desirable for all persons to carry radios, when possible) viii. Keep radio on at pre-determined times ix. Stop and wait for crew at trail junctions or pre-determined meeting locations x. Contact POC with travel plan deviations
	C. Solo Backcountry Travel	<ul style="list-style-type: none"> i. Must have demonstrated previous competency in the backcountry ii. Scope and plan route - discuss hazards with supervisor prior to trip iii. Complete backcountry travel plan to be filed with dispatch iv. Highly recommended to leave map of intended route (in addition to verbal description) v. Notify dispatch of trailhead parking area you will be utilizing vi. Identify other groups working in vicinity vii. Notify dispatch when leaving and returning to a designated trail (per <i>Yosemite Wilderness Travel Guidelines</i>), factoring for radio "dead zones" viii. Must carry a map and compass along with the knowledge of their use ix. Must carry a radio with at least one spare battery
	D. Carrying heavy loads	<ul style="list-style-type: none"> i. Pack sensibly, and use lighter gear when possible



PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
	E. Strains, sprains, and falls	<ul style="list-style-type: none"> i. Use proper boots that are well-fitted to your foot ii. Lift pack with legs, not back iii. Place feet carefully and intentionally
	F. Travel on steep, loose talus	<ul style="list-style-type: none"> i. On steep, loose talus slopes, space crew laterally so that one person is not above the other ii. If you encounter a loose rock, be sure to warn others iii. If a rock starts rolling, loudly yell “rock” to warn others iv. Place feet carefully and intentionally
	G. Stream crossings	<ul style="list-style-type: none"> i. Look downstream and consider consequences of falling in the water when rock hopping or crossing logs ii. Don’t wade in swift water deeper than your knee iii. Loosen pack for crossing, so that it may be dropped in case of a fall iv. Face upstream and use a stick for stability v. Place feet carefully and intentionally, slide feet across bottom of stream, do not lift feet in swift water
	H. Snow travel	<ul style="list-style-type: none"> i. Consider crossing snowfields later in the day when snow is softer ii. Use extra caution when crossing boulder fields, near trees, the edge of snowpack etc. – punching through the snowpack can cause serious injury
	I. Getting Lost	<ul style="list-style-type: none"> i. Scope and plan route - discuss hazards prior to trip ii. All persons must carry a map and compass <i>and know how to use them</i> iii. Stop and wait for crew at trail junctions or pre-determined meeting locations iv. Contact dispatch if completely lost
	J. High Altitude Pulmonary Edema, High Altitude Cerebral Edema, and Acute Mountain Sickness	<ul style="list-style-type: none"> i. Acclimatize at least 24 hours, if possible, before exertion at altitude ii. Go down if mountain sickness occurs iii. Stay hydrated iv. Recognize the symptoms which include: shortness of breath, nausea, vomiting, dizziness, and headache
	K. Hypothermia	<ul style="list-style-type: none"> i. Use layering techniques for conditions and activity level ii. Avoid cotton clothing iii. Avoid prolonged exposure to cold water iv. Stay hydrated v. Minimize exposure to precipitation vi. Carry and use adequate shelter (tent, pad and bag) vii. Be aware of the dangerous combination of high



PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
		winds and precipitation
	L. Dehydration / heat related injuries (sunstroke, heat exhaustion)	<ul style="list-style-type: none"> i. Drink plenty of water ii. Wear loose fitting clothing with long sleeves and pants iii. Take rest breaks in the shade when working in hot weather
	M. Sunburn	<ul style="list-style-type: none"> i. Use sun block, and/or wear loose fitting clothing with long sleeves and pants ii. Use sunglasses iii. Wear large brimmed hat iv. Use extra caution when on medications (e.g. antibiotics)
	N. Blisters	<ul style="list-style-type: none"> i. Use proper boots that are well-fitted to your foot with dry socks ii. Pre-treat areas which are being affected with mole-skin before blisters form iii. Carry extra socks
	O. Specific allergies (e.g. bee sting)	<ul style="list-style-type: none"> i. Conduct orientation with crew to find out medical histories ii. Ensure crew is aware of any specific allergies and proper treatment iii. Carry EPI pen and/or Benadryl if needed
	P. Poison oak	<ul style="list-style-type: none"> i. Learn to identify plant during all stages of growth ii. Avoid contact iii. Wash oils off with copious amounts of cool water iv. Change and wash clothing after contact v. Do not scratch or break blisters vi. Take ibuprofen for swelling vii. If rash, swelling, blisters, or eyes swelling shut develop within 4 to 12 hours after exposure or any breathing problems occur, seek medical attention immediately
	Q. Tetanus	<ul style="list-style-type: none"> i. Have tetanus updated ii. Avoid handling sharp rusty pieces of metal
	R. Animal encounters (e.g. bear, mountain lion)	<ul style="list-style-type: none"> i. Review appropriate behavior for specific animal encounters in <i>Wilderness Safety and Emergency Field Guide</i> ii. Use proper food storage techniques
	S. Rattlesnakes	<ul style="list-style-type: none"> i. Be aware of your surroundings especially early and late in the day ii. Rattlesnakes can blend in to their environment very well, watch where you step, they will usually warn you when you are too close iii. Stay calm iv. Seek immediate medical attention if bitten v. Elevate and cool the affected area to minimize circulation of venom
	T. Mosquitoes (see West Nile summary), ticks, and	<ul style="list-style-type: none"> i. Use insect repellent, wear long clothes, head net, etc.



PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
	other nuisance insects	ii. Wear long, light-colored pants and conduct nightly tick checks
	U. Hazard trees/falling limbs	i. Be aware of environment ii. Be aware of hazard trees and the potential for falling tree limbs, especially during windy conditions iii. Do not walk near “widow makers” or other tree hazards
	V. Inclement Weather	i. Carry and use adequate shelter for the conditions (tent, pad and bag) ii. Seek shelter at the advent of precipitation iii. Carry waterproof shell and pants or poncho iv. Use layering techniques for conditions and activity level v. Avoid cotton clothing vi. Carry lighter and backup matches for fire construction
	W. Lightning strikes	i. Stay away from high, exposed places and solitary trees or other high objects ii. Seek shelter in valley bottoms or in an even-height forest iii. If caught in the open near strikes, minimize your height and contact with the ground by squatting on your pack or other non-metallic insulation iv. Do not talk on your radio, transmitting can attract lightning
	X. Encounter Illegal activity (Marijuana cultivation)	i. Check with LE before entering an area. ii. Note, avoid and report: isolated tents away from recreational activity, trailers with no evidence of recreational activity, patterns of vehicle traffic or particular vehicle in isolated areas, unusual structures in remote areas with cultivation tools or supplies, signs of cultivation or soil disturbance in unlikely areas, black piping and modern trash scatters in remote areas. iii. Do not make contact with suspected growers. iv. Always use check-in and out procedures.
	Y. Medical emergencies	i. Carry first aid kit (with personal medications) ii. Carry radio with spare batteries iii. Contact dispatch immediately in case of an emergency iv. Keep CPR/First Aid certification updated
2. Conduct Survey	<i>same as 1. Travel to backcountry location</i>	<i>same as 1. Travel to backcountry location</i>
	A. Travel	i. Remain in eyesight or earshot of other crew members when conducting surveys (especially when off trail)
3. Make Camp	A. Giardia	i. Filter or boil all water ii. Wash hands after going to the bathroom and before cooking iii. Be aware of potential upstream water



PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
		contamination
	B. Waste disposal	i. Designate latrine for large parties, protocol for others
	C. Hazard trees/falling limbs	i. Be aware of environment ii. Be aware of hazard trees and the potential for falling tree limbs, especially during windy conditions iii. Do not walk near or place tent under "widow makers" or other tree hazards
	D. Flooding	i. Don't camp too close to streams with flood potential
	E. Moving around in the dark	i. Carry flashlight with extra batteries
4. Travel from backcountry location	<i>same as 1. Travel to backcountry location</i>	<i>same as 1. Travel to backcountry location</i>
	A. Arrival at final destination	i. Contact POC upon arrival and inform of travel status

SAFETY EQUIPMENT TO BE USED	INSPECTION REQUIREMENTS	TRAINING REQUIREMENTS
<ul style="list-style-type: none"> ▪ Good well-fitted boots, dry wool or synthetic socks, adjusted pack, wool or synthetic clothes for layering, rain gear, water filter, stove, radio with spare batteries, sleeping bag, sleeping pad, tent/shelter, first aid kit (including Tecnu, tweezers for ticks) ▪ Wilderness Safety and Emergency Field Guide 	<ul style="list-style-type: none"> ▪ Inspect water filter, stove, sleeping pad, tent, radio batteries, boots 	<ul style="list-style-type: none"> ▪ Maintain physical fitness ▪ Stretch before and after strenuous activity ▪ Train with pack and other gear (compass) ▪ Basic first aid

RAC:

- I – Death/Permanent Disability
- II – Permanent Partial Disability
- III – Lost Day Mishap
- IV – First Aid Only

- A – Likely To Occur
- B – Probably Will Occur
- C – Possible To Occur
- D – Unlikely To Occur
- E – Improbable to Occur

U:\NEP Resources\Archeology\safety\JHAs\Backcountry survey JSA.doc



JOB SAFETY ANALYSIS FORM

JOB/ACTIVITY: Backcountry Survey

RAC:

DATE REVISED: 01/09/07

PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
5. Travel in backcountry location	A. Physical fitness	<ul style="list-style-type: none"> i. Conduct orientation with crew to ascertain any relevant medical history, training, and skill level ii. Stretch before and after any strenuous activity
	B. Group Backcountry Travel	<ul style="list-style-type: none"> i. Scope and plan route - discuss hazards prior to trip ii. Make map of route (recommended to leave a copy if travel involves a complicated route and/or cross country travel) iii. Complete backcountry travel plan iv. Arrange a designated point of contact (POC) for the duration of your trip v. Notify POC of trailhead parking area you will be utilizing vi. All persons must carry a map and compass and know how to use them vii. Project Lead must carry a radio with spare batteries (it is desirable for all persons to carry radios, when possible) viii. Keep radio on at pre-determined times ix. Stop and wait for crew at trail junctions or pre-determined meeting locations x. Contact POC with travel plan deviations
	C. Solo Backcountry Travel	<ul style="list-style-type: none"> i. Must have demonstrated previous competency in the backcountry ii. Scope and plan route - discuss hazards with supervisor prior to trip iii. Complete backcountry travel plan to be filed with dispatch iv. Highly recommended to leave map of intended route (in addition to verbal description) v. Notify dispatch of trailhead parking area you will be utilizing vi. Identify other groups working in vicinity vii. Notify dispatch when leaving and returning to a designated trail (per <i>Yosemite Wilderness Travel Guidelines</i>), factoring for radio "dead zones" viii. Must carry a map and compass along with the knowledge of their use ix. Must carry a radio with at least one spare battery
	D. Carrying heavy loads	<ul style="list-style-type: none"> i. Pack sensibly, and use lighter gear when possible ii. Stretch before starting any strenuous activity
	E. Strains, sprains, and falls	<ul style="list-style-type: none"> i. Use proper boots that are well-fitted to your foot ii. Lift pack with legs, not back iii. Place feet carefully and intentionally



PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
	F. Travel on steep, loose talus	<ul style="list-style-type: none"> i. On steep, loose talus slopes, space crew laterally so that one person is not above the other ii. If you encounter a loose rock, be sure to warn others iii. If a rock starts rolling, loudly yell “rock” to warn others iv. Place feet carefully and intentionally
	G. Stream crossings	<ul style="list-style-type: none"> i. Look downstream and consider consequences of falling in the water when rock hopping or crossing logs ii. Don’t wade in swift water deeper than your knee iii. Loosen pack for crossing, so that it may be dropped in case of a fall iv. Face upstream and use a stick for stability v. Place feet carefully and intentionally, slide feet across bottom of stream, do not lift feet in swift water
	H. Snow travel	<ul style="list-style-type: none"> i. Consider crossing snowfields later in the day when snow is softer ii. Use extra caution when crossing boulder fields, near trees, the edge of snowpack etc. – punching through the snowpack can cause serious injury
	I. Getting Lost	<ul style="list-style-type: none"> i. Scope and plan route - discuss hazards prior to trip ii. All persons must carry a map and compass <i>and know how to use them</i> iii. Stop and wait for crew at trail junctions or pre-determined meeting locations iv. Contact dispatch if completely lost
	J. High Altitude Pulmonary Edema, High Altitude Cerebral Edema, and Acute Mountain Sickness	<ul style="list-style-type: none"> i. Acclimatize at least 24 hours, if possible, before exertion at altitude ii. Go down if mountain sickness occurs iii. Stay hydrated iv. Recognize the symptoms which include: shortness of breath, nausea, vomiting, dizziness, and headache
	K. Hypothermia	<ul style="list-style-type: none"> i. Use layering techniques for conditions and activity level ii. Avoid cotton clothing iii. Avoid prolonged exposure to cold water iv. Stay hydrated v. Minimize exposure to precipitation vi. Carry and use adequate shelter (tent, pad and bag) vii. Be aware of the dangerous combination of high winds and precipitation
	L. Dehydration / heat related injuries (sunstroke, heat exhaustion)	<ul style="list-style-type: none"> i. Drink plenty of water ii. Wear loose fitting clothing with long sleeves and pants iii. Take rest breaks in the shade when working in hot weather



PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
	M. Sunburn	<ul style="list-style-type: none"> i. Use sun block, and/or wear loose fitting clothing with long sleeves and pants ii. Use sunglasses iii. Wear large brimmed hat iv. Use extra caution when on medications (e.g. antibiotics)
	N. Blisters	<ul style="list-style-type: none"> i. Use proper boots that are well-fitted to your foot with dry socks ii. Pre-treat areas which are being affected with mole-skin before blisters form iii. Carry extra socks
	O. Specific allergies (e.g. bee sting)	<ul style="list-style-type: none"> i. Conduct orientation with crew to find out medical histories ii. Ensure crew is aware of any specific allergies and proper treatment iii. Carry EPI pen and/or Benadryl if needed
	P. Poison oak	<ul style="list-style-type: none"> i. Learn to identify plant during all stages of growth ii. Avoid contact iii. Wash oils off with copious amounts of cool water iv. Change and wash clothing after contact v. Do not scratch or break blisters vi. Take ibuprofen for swelling vii. If rash, swelling, blisters, or eyes swelling shut develop within 4 to 12 hours after exposure or any breathing problems occur, seek medical attention immediately
	Q. Tetanus	<ul style="list-style-type: none"> i. Have tetanus updated ii. Avoid handling sharp rusty pieces of metal
	R. Animal encounters (e.g. bear, mountain lion)	<ul style="list-style-type: none"> i. Review appropriate behavior for specific animal encounters in <i>Wilderness Safety and Emergency Field Guide</i> ii. Use proper food storage techniques
	S. Rattlesnakes	<ul style="list-style-type: none"> i. Be aware of your surroundings especially early and late in the day ii. Rattlesnakes can blend in to their environment very well, watch where you step, they will usually warn you when you are too close iii. Stay calm iv. Seek immediate medical attention if bitten v. Elevate and cool the affected area to minimize circulation of venom
	T. Mosquitoes (see West Nile summary), ticks, and other nuisance insects	<ul style="list-style-type: none"> i. Use insect repellent, wear long clothes, head net, etc. ii. Wear long, light-colored pants and conduct nightly tick checks
	U. Hazard trees/falling limbs	<ul style="list-style-type: none"> i. Be aware of environment ii. Be aware of hazard trees and the potential for falling tree limbs,



PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
		<p>especially during windy conditions</p> <p>iii. Do not walk near “widow makers” or other tree hazards</p>
	V. Inclement Weather	<p>i. Carry and use adequate shelter for the conditions (tent, pad and bag)</p> <p>ii. Seek shelter at the advent of precipitation</p> <p>iii. Carry waterproof shell and pants or poncho</p> <p>iv. Use layering techniques for conditions and activity level</p> <p>v. Avoid cotton clothing</p> <p>vi. Carry lighter and backup matches for fire construction</p>
	W. Lightning strikes	<p>i. Stay away from high, exposed places and solitary trees or other high objects</p> <p>ii. Seek shelter in valley bottoms or in an even-height forest</p> <p>iii. If caught in the open near strikes, minimize your height and contact with the ground by squatting on your pack or other non-metallic insulation</p> <p>iv. Do not talk on your radio, transmitting can attract lightning</p>
	X. Encounter Illegal activity (Marijuana cultivation)	<p>i. Check with LE before entering an area.</p> <p>ii. Note, avoid and report: isolated tents away from recreational activity, trailers with no evidence of recreational activity, patterns of vehicle traffic or particular vehicle in isolated areas, unusual structures in remote areas with cultivation tools or supplies, signs of cultivation or soil disturbance in unlikely areas, black piping and modern trash scatters in remote areas.</p> <p>iii. Do not make contact with suspected growers.</p> <p>iv. Always use check-in and out procedures.</p>
	Y. Medical emergencies	<p>i. Carry first aid kit (with personal medications)</p> <p>ii. Carry radio with spare batteries</p> <p>iii. Contact dispatch immediately in case of an emergency</p> <p>iv. Keep CPR/First Aid certification updated</p>
6. Conduct Survey	<i>same as 1. Travel to backcountry location</i>	<i>same as 1. Travel to backcountry location</i>
	A. Travel	<p>i. Remain in eyesight or earshot of other crew members when conducting surveys (especially when off trail)</p>
7. Make Camp	A. Giardia	<p>i. Filter or boil all water</p> <p>ii. Wash hands after going to the bathroom and before cooking</p> <p>iii. Be aware of potential upstream water contamination</p>
	B. Waste disposal	<p>i. Designate latrine for large parties, protocol for others</p>
	C. Hazard trees/falling limbs	<p>i. Be aware of environment</p>



PRINCIPAL STEP	POTENTIAL SAFETY CONCERNS	RECOMMENDED CONTROLS
		ii. Be aware of hazard trees and the potential for falling tree limbs, especially during windy conditions iii. Do not walk near or place tent under “widow makers” or other tree hazards
	D. Flooding	i. Don’t camp too close to streams with flood potential
	E. Moving around in the dark	i. Carry flashlight with extra batteries
8. Travel from backcountry location	<i>same as 1. Travel to backcountry location</i>	<i>same as 1. Travel to backcountry location</i>
	A. Arrival at final destination	i. Contact POC upon arrival and inform of travel status

SAFETY EQUIPMENT TO BE USED	INSPECTION REQUIREMENTS	TRAINING REQUIREMENTS
<ul style="list-style-type: none"> ▪ Good well-fitted boots, dry wool or synthetic socks, adjusted pack, wool or synthetic clothes for layering, rain gear, water filter, stove, radio with spare batteries, sleeping bag, sleeping pad, tent/shelter, first aid kit (including Tecnu, tweezers for ticks) ▪ Wilderness Safety and Emergency Field Guide 	<ul style="list-style-type: none"> ▪ Inspect water filter, stove, sleeping pad, tent, radio batteries, boots 	<ul style="list-style-type: none"> ▪ Maintain physical fitness ▪ Stretch before and after strenuous activity ▪ Train with pack and other gear (compass) ▪ Basic first aid

RAC:

- I – Death/Permanent Disability
- II – Permanent Partial Disability
- III – Lost Day Mishap
- IV – First Aid Only

- A – Likely To Occur
- B – Probably Will Occur
- C – Possible To Occur
- D – Unlikely To Occur
- E – Improbable to Occur

U:\EP Resources\Archeology\safety\JHAs\Backcountry survey JSA.doc



B.8. Parking Availability

B.8.1. Background

Traffic congestion in Yosemite Valley has been a well documented issue for many years. In fact, the reduction of traffic congestion was one of the primary goals of the 1980 General Management Plan (YOSE 1980). The number of vehicles in activity areas directly affects visitor experience (part of the recreational Outstandingly Remarkable Value) (Littlejohn et al. 2006, White et al. 2006). When the number of vehicles exceeds the supply of appropriate parking, drivers often resort to parking along the roadside and in other inappropriate areas (Thomas et al. 2005; Elliot et al. 2006). As a result, resources may be adversely affected. Therefore, it is important to define the point when these values become most at risk of degradation. It has been determined that these risks occur significantly when designated parking areas fill to capacity and staff perform Alternative Parking Measures (APM) to alleviate congestion and stopped traffic flows. Alternative parking actions are defined as the point when the Camp 6/Day Use parking lot is full and traffic staff begins directing people to park along the roadside or other alternative areas. Monitoring day use parking capacity provides park management with an indication that visitor use levels and corresponding vehicular use have reached unacceptable levels that may be causing unacceptable impacts to park resources and the quality of visitors' experiences.

Description of indicator and standard:

Indicator: This indicator is used to identify the conditions of the transportation system in Yosemite Valley. Parking lots monitored to identify the amount of time that they are at full capacity, forcing them to be shut down to incoming visitors.

Standard: A standard has yet to be determined

Zone(s): 2C Day Use; 3B Visitor Base and Lodging

Rationale for indicator: Transportation has long played an important role in the National Park system (Percival 1999). Transportation issues have recently been studied at such parks as Yellowstone (Mings et al. 1992), Smoky Mountains (Sims et al. 2005), Blue Ridge Parkway (Vallier et al. 2003) as well as in Yosemite (Nelson and Tumlin 2000, YOSE 1999, White et al. 2006). Traffic congestion was identified in the Yosemite Valley Plan as one of the principal human use impacts to mitigate (YOSE 2000).

Thousands of vehicles enter Yosemite Valley each year, resulting in significant traffic congestion. Traffic congestion can cause a variety of impacts to natural and cultural resources as well as the quality of the visitor experience. Specific impacts include increased travel and waiting times, wildlife depredation, air pollution, noise, vegetation loss, and others. Parking availability serves as an indicator of overall traffic congestion in Yosemite Valley and, therefore, serves as an early warning sign suggestive of the extent to which human vehicular use is negatively affecting the park.

Objective: Provide expedient and accurate assessment of parking capacity at the Camp 6/Day Use parking area as an indicator of overall human vehicular use levels in Yosemite Valley.

B.8.2. Sampling Design

Two sampling strategies will be employed to monitor parking availability in 2008. First, a daily log will be kept documenting the instances that the Camp 6/Day Use parking area fills to capacity and is closed. This will provide information as to the frequency and duration of parking area closures. In addition, vehicular use at the Yosemite Lodge bus lot will be monitored. Collectively, these areas, along with Camp 6/Day Use parking represent the principal parking areas in Yosemite Valley. Measuring and monitoring their use will provide a more comprehensive view of overall parking capacity.



Sampling schedule: The following is a sampling schedule for the parking behaviors data collection. All other data collection will be conducted on a daily basis using a log as shown in the data sheets section below.

Figure B.8.1 Example of Sampling Schedule for Parking Availability

July						
Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
					1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20 Weekday Sample	21 Weekday Sample	22	23
24	25	26	27	28	29 Weekend Sample	30 Weekend Sample
31						

August						
Monday	Tuesday	Wednesday	Thursday	Friday	Saturday	Sunday
	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17 Weekday Sample	18 Weekend Sample	19	20
21	22	23	24	25	26 Weekend Sample	27 Weekend Sample
28	29 Weekday Sample	30 Weekday Sample	31			



B.8.3. Field Methods

Data collection and measurement: The following list describes the variables for which data will be collected at all parking locations.

- **ID:** Enter case identification number in ascending order beginning with “1”.
- **Date:** Enter date of sample as follows (e.g. 10/21/08)
- **Weekday / Weekend:** Enter “WD” for weekday or “WE” for weekend. For the purposes of this monitoring effort weekdays are considered to be Monday through Thursday and weekends are considered to be Friday, Saturday and Sunday.
- **Holiday:** Record “Y” for yes if it is a holiday or “N” if it is not a holiday.
- **Directed:** Record a “Y” for yes if parking was directed on the day of sampling or “N” for no, it was not directed on the sampling day.
- **Time Initiated:** Record the time Alternative Parking Measure (APM) was initiated (e.g. 0900)
- **Time Terminated:** Record the time Alternative Parking Measure (APM) was terminated (e.g. 1032)
- **Time In:** Enter the time the bus entered the loading area at Yosemite Lodge (e.g. 0830)
- **Time Out:** Enter the time the bus left the loading area at Yosemite Lodge (e.g. 1130)
- **Bus Company Name:** Enter the name of the bus company
- **License Plate #:** Enter the license plate number of the vehicle / bus
- **State:** Record the state from the license plate on the bus
- **# of Passengers:** Record the number of passengers on the bus
- **Closure VOG:** Record the number of Vehicles on the Ground (VOG) at the time the Alternative Parking Measure (APM) was initiated.
- **Record other Factors:** Record other factors that may have lead to APM (gate back-ups, road closures due to accidents or fire, back ups at the entrance gate, etc.)
- **Total Vehicles In:** Record the total number of vehicles that entered the parking area from the traffic counter at the parking area entrance.
- **Vehicles Parked at Sampling Times:** Record the total number of vehicles by type – Motorcycle, Automobile, or Campers / Trailers
- **Comments:** Record any field notes or observations pertinent to data collection on day of sampling.



B.8.4. Data Management

Data entry: Data will be entered into a database by traffic management staff on a monthly basis. UCMMP staff will re-code a selected sample of datasheets to ensure quality of data entry. Discrepancies between data coding will be reconciled using the completed datasheets.

Data analysis: Data will be analyzed using statistical software (either Statistical Package for the Social Sciences – SPSS or JMP). Descriptive statistics will be used to present frequency distributions of the data. The length of time of parking area closures should be analyzed using both the mean and median of the distribution.

Data reporting: Results will be compiled and presented in the UCMMP Annual Report. Additionally, information will be presented at a public meeting and made available on the park's website.

Data storage (metadata): Data will be stored electronically on the MS10 server in the Yosemite National Park computer directory. Hard copies of completed datasheets will remain on file with the Visitor Use and Social science branch in EI Portal. These copies should be stored in a fire-safe area. The life cycle should be 3 years for printed materials after which time all data and report should be physically and electronically archived to allow for future longitudinal analysis and documentation.

B.8.5. Personnel Requirements and Training

Roles and responsibilities (tasks and time commitments): UCMMP personnel will work collaboratively with traffic management staff in the Protection Division to conduct monitoring activities. Daily logs will be kept by traffic management staff and the detailed sampling of parking areas will be conducted by UCMMP staff.

Qualifications: Data collection personnel should be capable of working outdoors for extended periods of time. They should be able to carryout basic mathematical exercises and document results accordingly. Personnel should also exhibit the ability to conduct activities in a varied and complex setting where multiple tasks may be required at the same time.

Training: Monitoring personnel will be trained jointly by the traffic manager and UCMMP staff on the procedures and methods of data collection. Training will consist of an explanation of data collection procedures and a trial run-through collecting mock data. Once personnel have been trained and data are being collected, UCMMP staff will conduct field visits to ensure that data continue to be collected properly and to conduct additional training or troubleshoot problems should they arise over the course of the data collection effort.

Safety: Particular attention will need to be given to collecting data in a safe manner as personnel will be working in close proximity to moving vehicles. A job hazard analysis has been completed and appears below (Table B.8.1.).



Table B.8.1. Job Hazard Analysis for Parking Availability Data Collection

United States Department of Interior NATIONAL PARK SERVICE	1. WORK PROJECT/ACTIVITY	2. LOCATION	
	UCMMP Transportation	Yosemite Valley, YNP	
Job Hazard Analysis (JHA)	3. NAME OF ANALYST	4. JOB TITLE	5. DATE PREPARED
	Dave Henderson	Facilities Mgr.	June, 2006
6. TASKS/PROCEDURES	7. HAZARDS	8. ABATEMENTS ACTIONS ENGINEERING CONTROLS – SUBSTITUTION – ADMINISTRATIVE CONTROLS – PPE	
a. Driving to, from, and around sampling sites.	a. Collision resulting in damage, injury, or death.	a. Drive defensively, obey traffic laws, lights on, seatbelt on, be alert for pedestrians, wildlife, and distracted drivers. Know procedures for installing snow chains. Always carry and know how to use a Park radio.	
b. Standing, walking, hiking and other physical exertion.	b. Exhaustion, muscle strain, dehydration and fatigue from prolonged standing or physical exertion.	b. Drink plenty of fluids, bring snacks and/or meals if out during lunch hours, Take periodic rests and stretch before and after physical activity.	
c. Working outdoors in cold and/or wet weather.	c. Hypothermia, reduced resistance to illness.	c. Wear appropriate clothing and carry extra layers. Stay dry. Use rubberized raingear if possible. Stay hydrated preferably with warm liquids. Stop work to warm up if necessary. Snack often.	
d. Working outdoors in hot / extreme heat weather.	d. Fatigue, exhaustion, dehydration and heat stroke.	d. Wear appropriate clothing and use sunscreen. Drink fluids and snack throughout the day. Carry extra water and dehydration salts along with first aid kit.	
10. SUPERVISORS SIGNATURE	11. TITLE	12. DATE	



B.8.6 Operational Requirements

Work plan: Monitoring efforts associated with the parking capacity indicator should follow a general work plan as presented in Table A.3.1 in the introduction to this field guide. Generally, two traffic management seasonal staff (wage grade) will be used to collect data. Data will need to be collected between May and October, or the peak season of visitor use in the park.

Equipment and materials:

- Clipboard
- Pencils / sharpener
- Data sheet
- Instructions for data sheet
- Watch
- Hand counter(s)

B.8.7 References

- Littlejohn, M.; Meldrum, B.; and Hollenhorst, S. (2005) *Yosemite National Park Visitor Study*. Park Studies Unit, NPS Visitor Services Project Report #168. University of Idaho.
- Mings, R. and McHugh, K. (1992) *The Spatial configuration of Travel to Yellowstone National Park*. Journal of Travel Research. Spring. 38.
- Nelson, B. and Tumlin, J. (2000) *Yosemite regional Transportation Strategy*, Transportation Research Record: Journal of the Transportation Research Board. V.1735, pp.70-78.
- Percival, K. (1999) *National Parks and the Auto: A Historical Overview*. Paper presented at the National Parks: Transportation Alternatives and Advanced Technology for the 21st Century, Big Sky, MT.
- Sims, C., Hodges, D., Fly, J., and Stephens, B. (2005) *Modeling Acceptance of a Shuttle System in the Great Smoky Mountains National Park*. Journal of Park and Recreation Administration. 23(3), 25-44.
- Thomas, S., Beatty, S., Croissant, E., Johnson, B., and Weaser, J. (2005) Visitor Experience and Resource Protection Transportation Environmental Impacts Study. Internal Report. Yosemite National Park, CA.
- Elliot, C., Thomas, S., Johnson, B., Weaser, J. and Bacon, J. (2006) Visitor Experience Resource Protection West Yosemite Valley El Capitan Shuttle Stops Transportation Impacts & Social Trails Assessment. Internal Technical Report. Yosemite National Park, CA.
- Valliere, W., Manning, R., Lawson, S., Bacon, J., and Laven, D. (2003) *Standards of quality for Traffic Congestion in Parks: An Empirical Study of the Blue Ridge Parkway*. In: Proceedings of the 2003 Northeastern Recreation Research Symposium. GTR-NE-317. USDA Forest Service.
- White, D., Youngs, Y., Wodrich, J. and Borcherding, T. (2006) *Visitor Experiences and Transportation Systems in Yosemite National Park*. Draft Technical Report. USDI National Park Service, Yosemite National Park, CA.
- YOSE (1980) General Management Plan. USDI National Park Service. Yosemite National Park, CA.
- YOSE (1999) *Visitor Use Study*. Technical Report prepared by ORCA Consulting. USDI National Park Service, Yosemite National Park, CA.
- YOSE (2000) *Yosemite Valley Plan*. USDI National Park Service. Yosemite National Park, CA.



APPENDIX A: GLOSSARY OF TERMS AND ACRONYMS



TERMS

Azimuth: This is the direction of a celestial object, measured clockwise around the observer's horizon from north. So an object due north has an azimuth of 0°, one due east 90°, south 180° and west 270°. Azimuth and altitude are usually used together to give the direction of an object in the topocentric coordinate system.

Carrying Capacity: As it applies to parks, carrying capacity is the type and level of visitor use that can be accommodated while sustaining the desired resource and social conditions that complement the purpose of a park unit and its management objectives.

Geographic Information System (GIS): A computer system for capturing, storing, checking, integrating, manipulating, analyzing and displaying data related to positions on the Earth's surface. Typically, a Geographical Information System (or Spatial Information System) is used for handling maps of one kind or another. These might be represented as several different layers where each layer holds data about a particular kind of feature. Each feature is linked to a position on the graphical image of a map.

Global Positioning System (GPS): The Global Positioning System (GPS) is a satellite-based navigation system made up of a network of 24 satellites placed into orbit by the U.S. Department of Defense. GPS was originally intended for military applications, but in the 1980s, the government made the system available for civilian use. GPS works in any weather conditions, anywhere in the world, 24 hours a day. There are no subscription fees or setup charges to use GPS.

Indicator: Indicators are specific, measurable physical, ecological, or social variables that reflect the overall condition of a management zone. Resource indicators measure visitor impacts on the biological, physical, and/or cultural resources of a park; social indicators measure visitor impacts on the park visitor experience.

Management zone (zone): A geographical area for which management directions or prescriptions have been developed to determine what can and cannot occur in terms of resource management, visitor use, access, facilities or development, and park operations.

Outstandingly Remarkable Values (ORVs): Those resources in the corridor of a Wild and Scenic River that are of special value and warrant protection. ORVs are the "scenic, recreational, geologic, fish and wildlife, historic, cultural or other similar values...that shall be protected for the benefit and enjoyment of present and future generations" (16 USC 1272).

River corridor: The area within the boundaries of a Wild and Scenic River (e.g., the Merced River corridor).

Standard: Standards define the desired condition of each indicator variable. A standard does not define an intolerable condition, but rather the minimum acceptable condition.

User capacity: As it applies to parks, user capacity is the type and level of visitor use that can be accommodated while sustaining the desired resource and social conditions based on the purpose and objectives of a park unit.

Visitor experience: The perceptions, feelings, and reactions a park visitor has in relationship with the surrounding environment.



Wetland: Wetlands are defined by the U.S. Army Corps of Engineers (CFR, Section 328.3[b], 1986) as those areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions.

Wild and Scenic Rivers: Those rivers receiving special protection under the Wild and Scenic Rivers Act.

Wilderness: Those areas protected by the provisions of the 1964 Wilderness Act. These areas are characterized by a lack of human interference in natural processes.

Wilderness Impact Monitoring System (WIMS): An inventory process that monitors campsite and trail conditions in Yosemite National Park backcountry and Wilderness.



ACRONYMS

C	Centigrade
CA	California
CCC	Continuing Calibration Check
CD	Compact Disc
cfs	cubic feet per second
cm	centimeter
CMP	Comprehensive Management Plan
DH-81	Standard USGS wading sediment / water sampling device
DH-95	Standard USGS suspended sediment / water sampling device
DO	Dissolved Oxygen
DI	Deionized Water
DOQs	Digital Orthophotos
EPA	Environmental Protection Agency
EDI	Equal Discharge Increment
EWI	Equal Width Interval
GIS	Geographic Information System
GPS	Global Positioning System
HCl	Hydrochloric Acid
Hg	Mercury
ICC	Initial Calibration Check
KCl	Potassium Chloride
L	Liter
mg/l	Milligram per Liter
ml	Milliliter
MDL	Method Detection Limit
mm	Millimeter



MPN	Most Probable Number
NAD27	North American Datum 27
NAD83	North American Datum 83
NELAP	National Environmental Laboratory Accreditation Program
NFM	National Field Manual
NIST	National Institute of Standards and Technology
NPS	National Park Service
PDA	Personal Data Assistant
pH	Potential Hydrogen
QAPP	Quality Assurance Project Plan
QC	Quality Control
SOP	Standard Operating Procedure
USGS	United States Geological Survey
UTM	Universal Transverse Mercator
μS	Micro-Siemens (a measure of electrical conductivity)
μmhos	Micro-mhos (inverse of micro-ohms, a measure of electrical resistance)
UCMMP	User Capacity Management Monitoring Program
WIMS	Wilderness Impacts Monitoring System



APPENDIX B: LIST OF PREPARERS



NATIONAL PARK SERVICE

Administration:

- Michael Tollefson, Superintendent
- Kevin Cann, Deputy Superintendent

Core Team:

- Andrew Ackermen, UCMMP Program Assistant, Visitor Use Social Sciences, Resources Management and Science
- Sue Beatty, Restoration Ecologist, Vegetation and Ecological Restoration, Resources Management and Science
- Mark Fincher, Wilderness Specialist, Visitor Protection
- Dave Henderson, Traffic Supervisor, Visitor Protection
- Marci Jones, Biological Science Technician, Vegetation and Ecological Restoration, Resources Management and Science
- Laura Kirn, Branch Chief, Archeology and Anthropology, Resources Management and Science
- Bret Meldrum, Branch Chief, Visitor Use Social Sciences, Resources Management and Science
- Joe Meyer, Branch Chief, Physical Science and GIS, Resources Management and Science
- Jessica Middleton, Archeologist, Archeology and Anthropology, Resources Management and Science
- Todd Newburger, Biologist, UCMMP Program Manager, Visitor Use and Social Science, Vegetation and Ecological Restoration, Resources Management and Science
- Dr. Niki Stephanie Nicholas, Chief, Resources Management and Science
- Jim Roche, Hydrologist, Physical Science and GIS, Resources Management and Science
- Victoria Seher, Wildlife Biologist, Wildlife Management, Resources Management and Science
- Steve Thompson, Branch Chief, Wildlife Management, Resources Management and Science
- Katy Warner, Supervisory Physical Science Technician, Resources Management and Science
- Judi Weaser, Branch Chief, Vegetation and Ecological Restoration, Resources Management and Science
- Brittany Woiderski, Biological Science Technician, Vegetation and Ecological Restoration, Resources Management and Science



CONSULTING TEAM

Colorado State University:

- Dr. Peter Newman, Social Scientist, Department of Natural Resource Recreation and Tourism, Colorado State University
- David Pettebone, Graduate Research Assistant, Department of Natural Resource Recreation and Tourism, Colorado State University

North Carolina State University:

- Dr. Yu Fai Leung, Recreation Ecologist, College of Natural Resources, Parks, Recreation and Tourism Management , North Carolina State University

Virginia Polytechnic Institute:

- Dr. Steve Lawson, Social Scientist, College of Natural Resources, Department of Forestry, Virginia Polytechnic Institute and State University